



Machine Id
8427
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (20 LTR)

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116847	GFL0110729	GFL0097447
Sample Date		Client Info		14 May 2024	12 Feb 2024	15 Nov 2023
Machine Age	hrs	Client Info		493	493	493
Oil Age	hrs	Client Info		493	493	493
Filter Age	hrs	Client Info		493	493	493
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				SEVERE	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	15	11	14
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	2	1
Lead	ppm	ASTM D5185(m)	>40	0	<1	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	2	2
Potassium	ppm	ASTM D5185(m)	>20	5	<1	0
Fuel	%	ASTM D7593*	>5	▲ 10.4	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.4	0.4	0.5
Nitration	Abs/cm	ASTM D7624*	>20	12.6	10.6	9.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.7	20.8	21.5
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		2	1	2
Boron	ppm	ASTM D5185(m)	0	1	2	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	50	59	59
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	783	941	938
Calcium	ppm	ASTM D5185(m)	1070	867	1027	1050
Phosphorus	ppm	ASTM D5185(m)	1150	799	992	998
Zinc	ppm	ASTM D5185(m)	1270	974	1183	1198
Sulfur	ppm	ASTM D5185(m)	2060	2061	2572	2411
Oxidation	Abs/.1mm	ASTM D7414*	>25	23.0	17.9	17.7
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 11.6	14.0	14.0

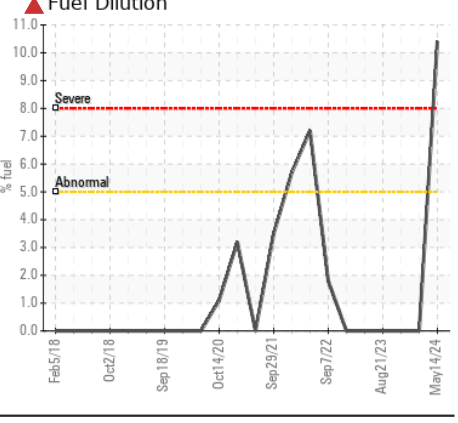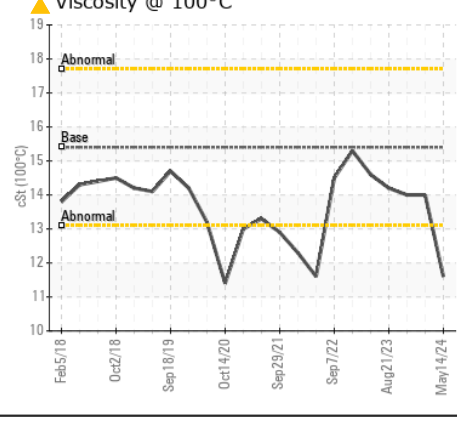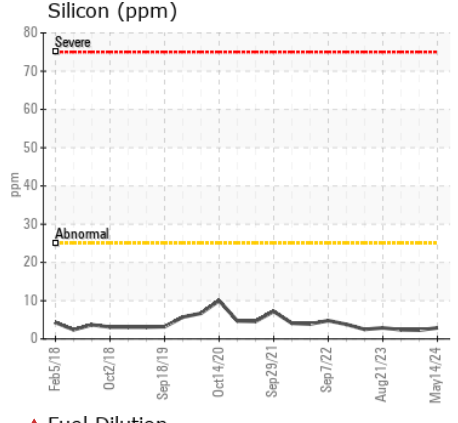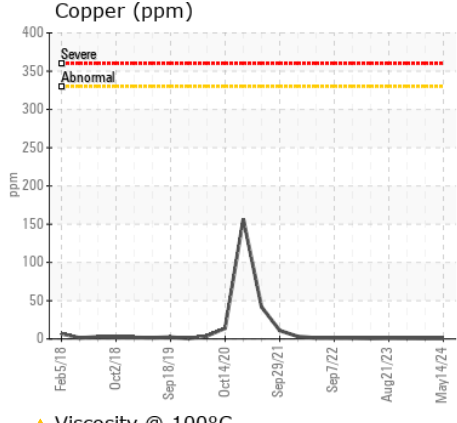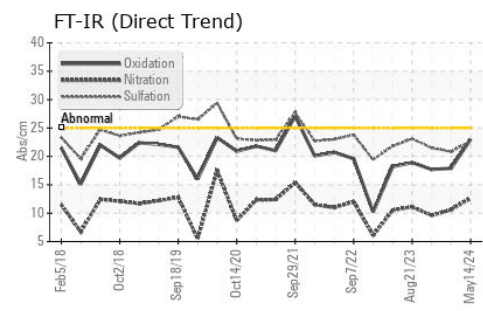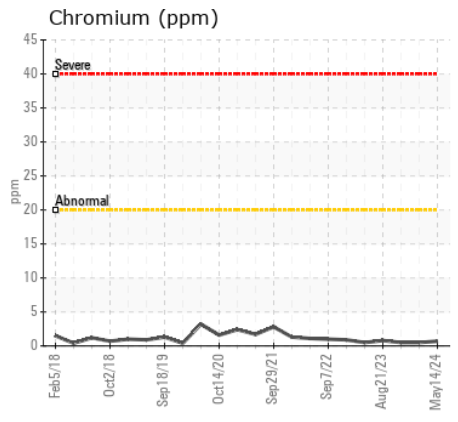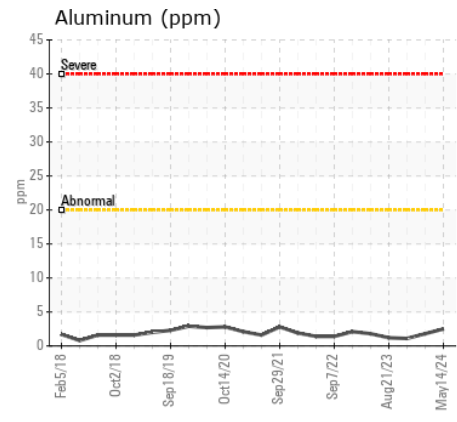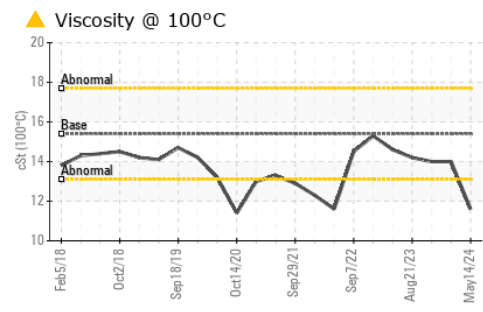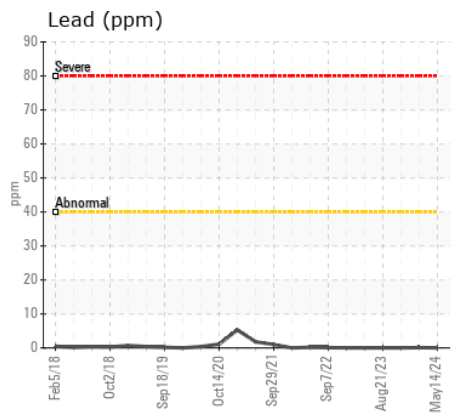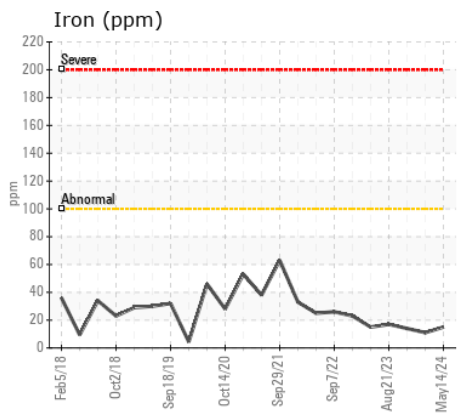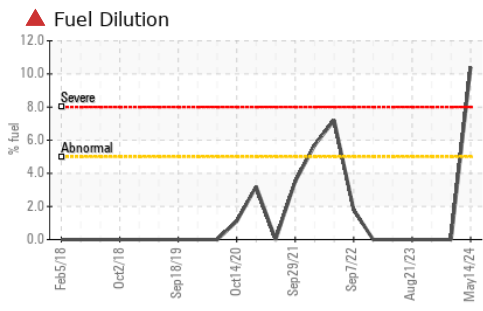

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0116847 **Received** : 16 May 2024
Lab Number : 02635956 **Tested** : 17 May 2024
Unique Number : 5785118 **Diagnosed** : 17 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 221 - Windsor
 905 Tecumseh Road W
 Windsor, ON
 CA N8W 4J5
 Contact: Pamela-Jean Butler
 pamelajeane.butler@gflenv.com
 T: (519)948-8126
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.