



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
404.004 (S/N RRM300023245)
 Component
Port Sternthrustrer
 Fluid
MOBIL MOBILGEAR 600 XP ISO 68 (800 LTR)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MAR 2 test kits, this testkit includes AN to determine the suitability of the oil for continued use.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0935659	---	---
Sample Date		Client Info		10 May 2024	---	---
Machine Age	hrs	Client Info		6718	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>25	5	---	---
Chromium	ppm	ASTM D5185(m)	>3	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>2	<1	---	---
Lead	ppm	ASTM D5185(m)	>3	0	---	---
Copper	ppm	ASTM D5185(m)	>3	5	---	---
Tin	ppm	ASTM D5185(m)	>3	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>10	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.

Sodium	ppm	ASTM D5185(m)		13	---	---
Boron	ppm	ASTM D5185(m)		34	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		3	---	---
Calcium	ppm	ASTM D5185(m)		196	---	---
Phosphorus	ppm	ASTM D5185(m)		293	---	---
Zinc	ppm	ASTM D5185(m)		20	---	---
Sulfur	ppm	ASTM D5185(m)		8664	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	68	69.5	---	---

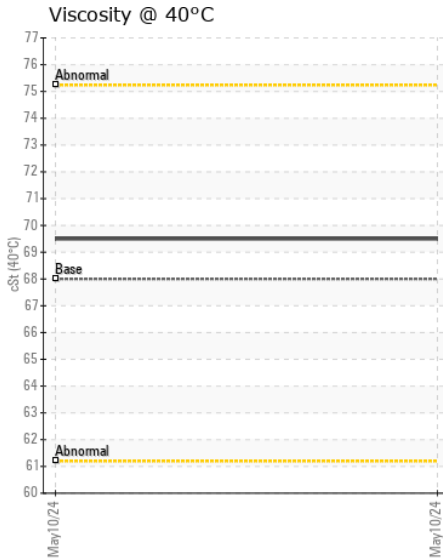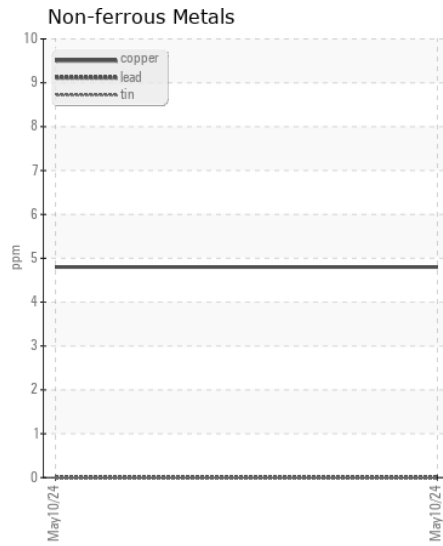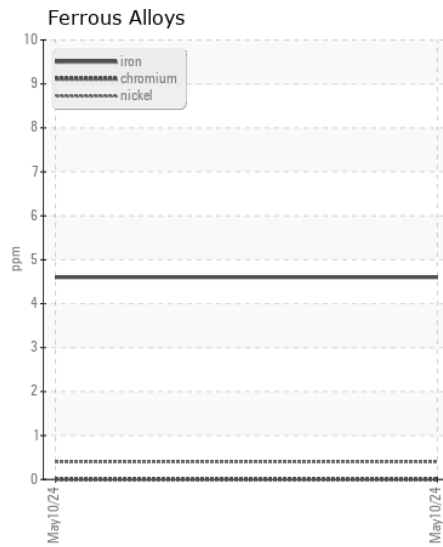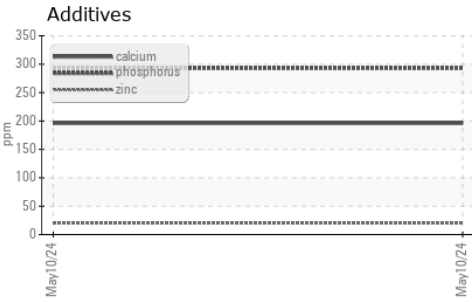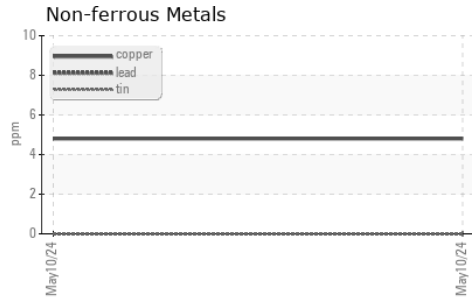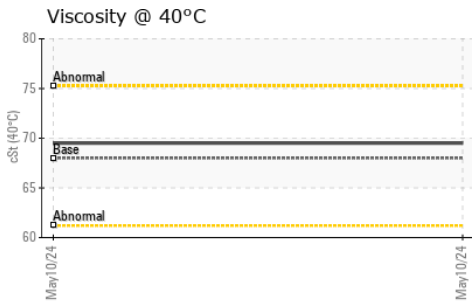

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0935659
Lab Number : 02636173
Unique Number : 5785335
Test Package : MAR 1

Horizon Maritime Services Ltd. - Dragon
 422 Main Street
 Mulgrave, NS
 CA B0E 2G0
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: