



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(C-GKSX)
Machine Id
L-9895-61A
Component
Left Piston Aircraft Engine
Fluid
SHELL AEROSHELL W 15W50 MGR (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0882971	WC0706061	WC0706032
Sample Date		Client Info		27 Apr 2024	22 Nov 2023	16 Nov 2023
TSN	hrs	Client Info		0	0	0
TSO	hrs	Client Info		1427	1229	1201
Oil Age	hrs	Client Info		49	27	52
Filter Age	hrs	Client Info		49	27	52
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	64	20	40
Chromium	ppm	ASTM D5185(m)	>20	11	3	8
Nickel	ppm	ASTM D5185(m)	>15	8	3	5
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>25	11	6	11
Lead	ppm	ASTM D5185(m)	>20000	9611	6594	11331
Copper	ppm	ASTM D5185(m)	>25	6	4	6
Tin	ppm	ASTM D5185(m)	>30	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION






The water content is negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	4	6	4
Potassium	ppm	ASTM D5185(m)	>20	0	0	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water	%	ASTM D6304*	>0.1	0.022	0.017	0.017
ppm Water	ppm	ASTM D6304*	>1000	222	177	176.9
Glycol		WC Method		NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	VLITE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	.2%	.2%	.2%

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	1	<1
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	5	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	10	3	3	5
Calcium	ppm	ASTM D5185(m)	10	<1	1	<1
Phosphorus	ppm	ASTM D5185(m)	1280	1004	1104	1098
Zinc	ppm	ASTM D5185(m)	10	3	3	3
Sulfur	ppm	ASTM D5185(m)	1800	1558	1475	1254
Visc @ 100°C	cSt	ASTM D7279(m)	18.2	19.8	18.5	19.2

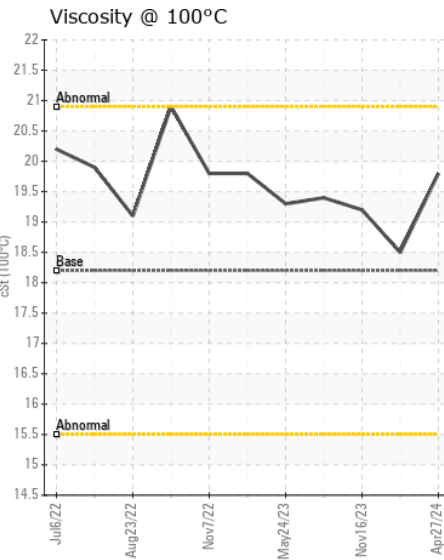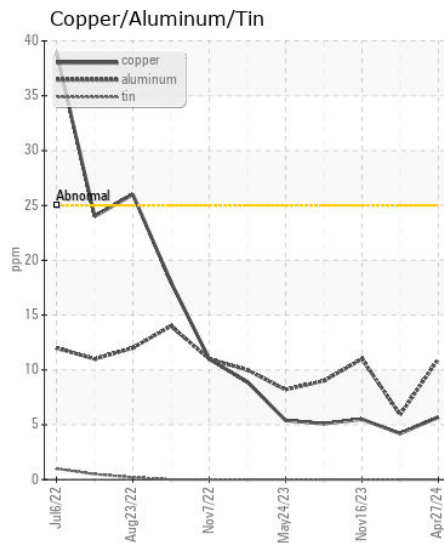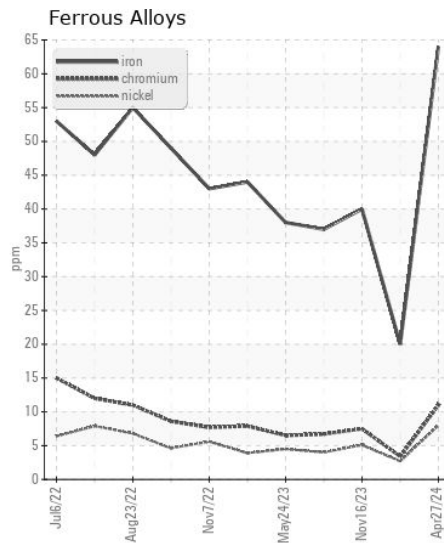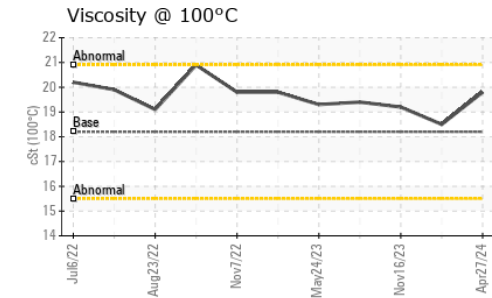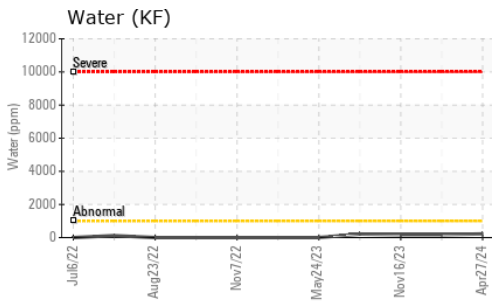

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0882971
Lab Number : 02636341
Unique Number : 5785503
Test Package : AVI 1 (Additional Tests: KF)
Received : 17 May 2024
Tested : 22 May 2024
Diagnosed : 22 May 2024 - Kevin Marson

KASI AVIATION SERVICES INC
 455 FENELON BLVD., SUITE 107
 DORVAL, QC
 CA H9S 5T8
 Contact: MARK KALUS
 MARK@KALUSAIR.COM
 T: (514)633-5605
 F: (514)633-5605

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.