



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L566 077757-1758
Component
Front Left Wheel Hub
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0288077	---	---
Sample Date		Client Info		10 May 2024	---	---
Machine Age	hrs	Client Info		556	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	162	---	---
Chromium	ppm	ASTM D5185(m)	>8	2	---	---
Nickel	ppm	ASTM D5185(m)	>5	6	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>5	1	---	---
Lead	ppm	ASTM D5185(m)	>5	1	---	---
Copper	ppm	ASTM D5185(m)	>50	65	---	---
Tin	ppm	ASTM D5185(m)		4	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	27	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is higher than typical. Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	---	---
Boron	ppm	ASTM D5185(m)	0	2	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	26	---	---
Magnesium	ppm	ASTM D5185(m)	<1	3	---	---
Calcium	ppm	ASTM D5185(m)	<1	8	---	---
Phosphorus	ppm	ASTM D5185(m)	2143	2298	---	---
Zinc	ppm	ASTM D5185(m)	<1	22	---	---
Sulfur	ppm	ASTM D5185(m)	23468	24956	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	170	192	---	---

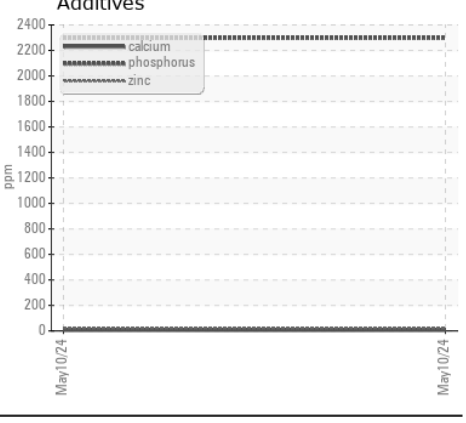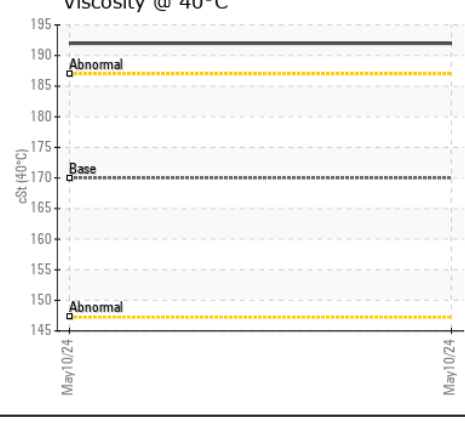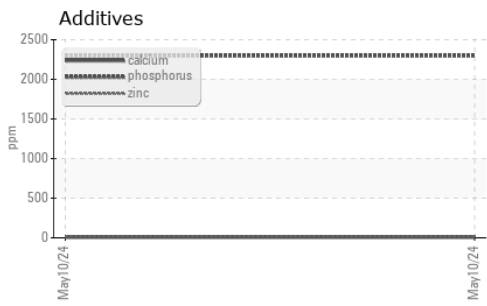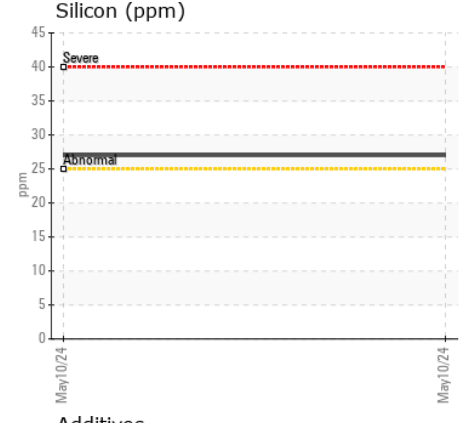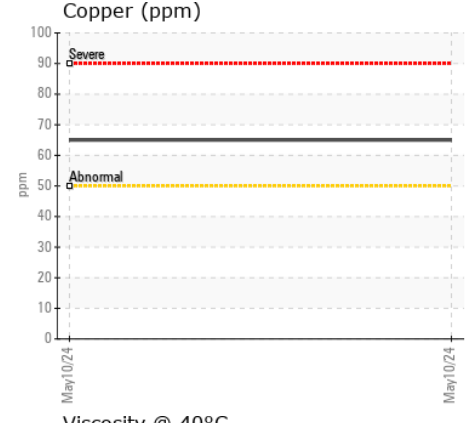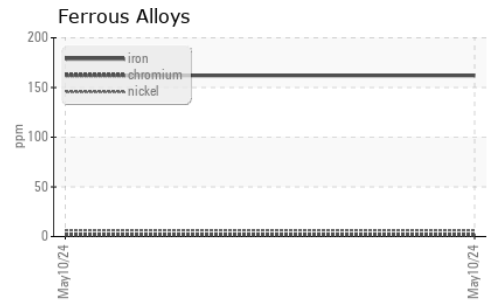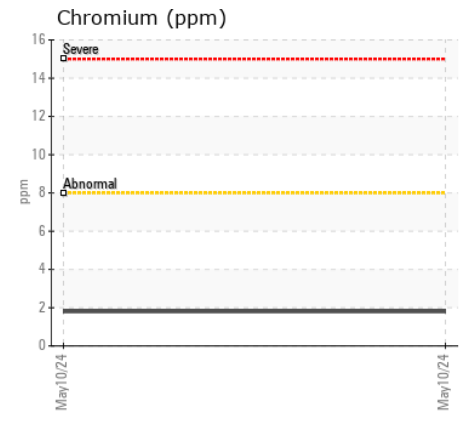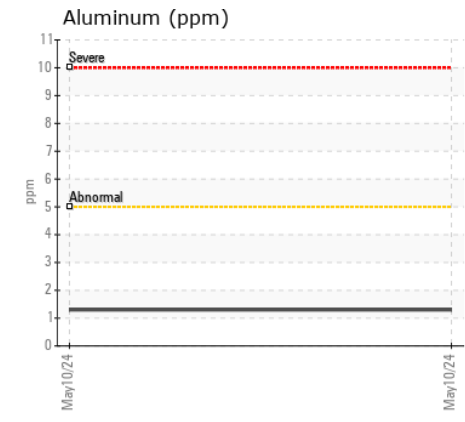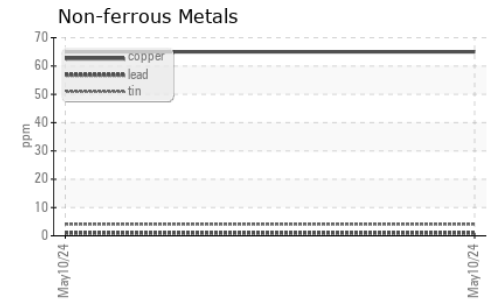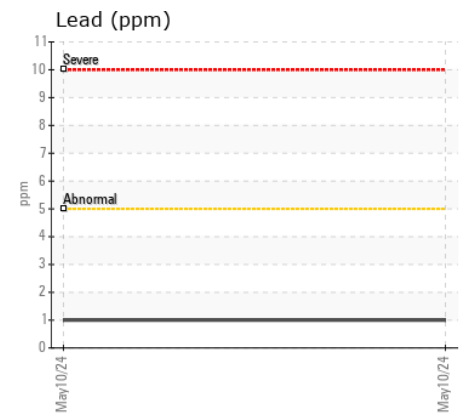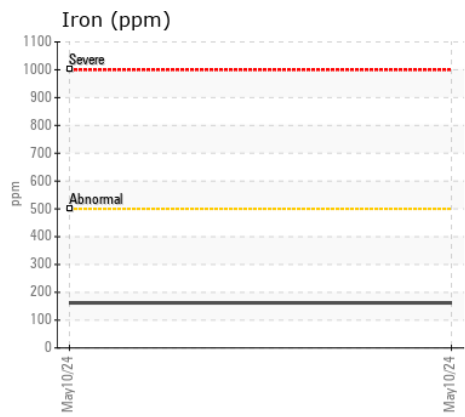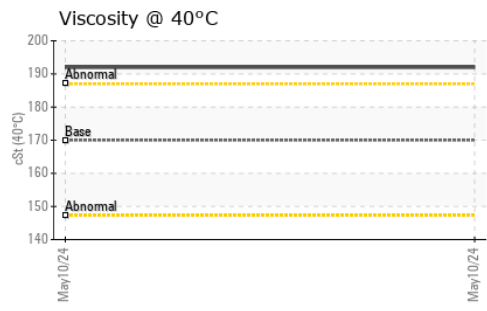

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0288077
Lab Number : 02636413
Unique Number : 5785575
Test Package : MOB 1
Received : 17 May 2024
Tested : 17 May 2024
Diagnosed : 21 May 2024 - Kevin Marson

Abbycel Substrate Ltd.
 3545 Ross Road
 Abbotsford, BC
 CA V4X 1M6
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: