



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HARVESTER HARVESTER
Component
Diesel Engine
Fluid
PETRO CANADA 5W40 SYNTHETIC (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0020572	---	---
Sample Date		Client Info		01 May 2024	---	---
Machine Age	hrs	Client Info		11497	---	---
Oil Age	hrs	Client Info		400	---	---
Filter Age	hrs	Client Info		400	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	53	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	2	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	1	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.5	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.7	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		6	---	---
Boron	ppm	ASTM D5185(m)		19	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		61	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		1093	---	---
Calcium	ppm	ASTM D5185(m)		850	---	---
Phosphorus	ppm	ASTM D5185(m)		983	---	---
Zinc	ppm	ASTM D5185(m)		1231	---	---
Sulfur	ppm	ASTM D5185(m)		2651	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		10.64	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		88.5	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		14.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		169	---	---

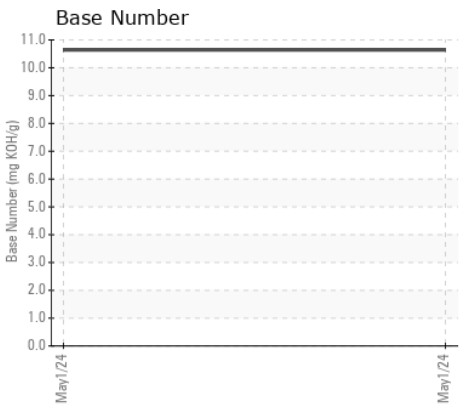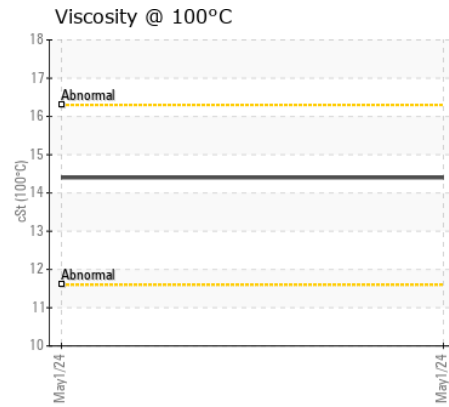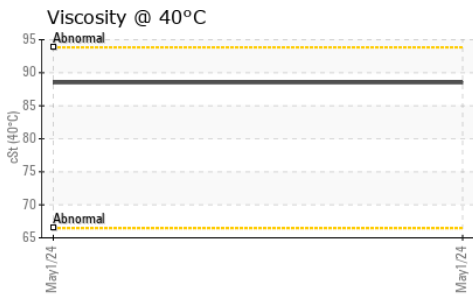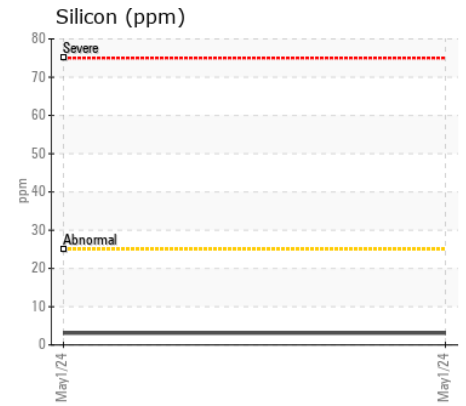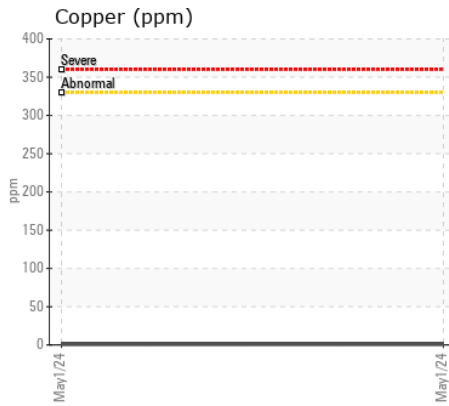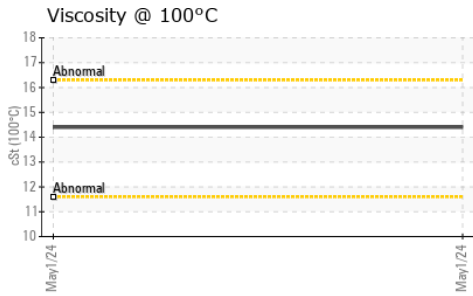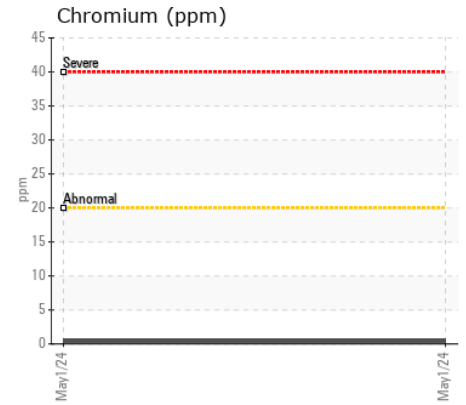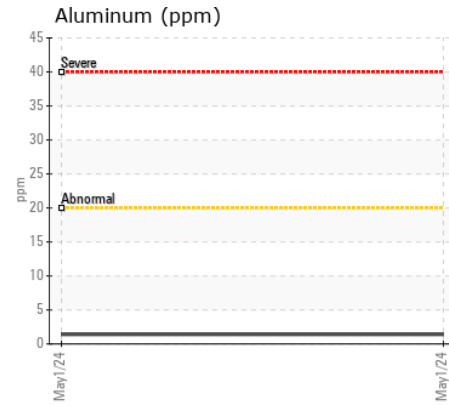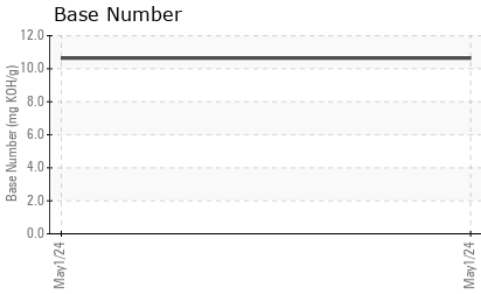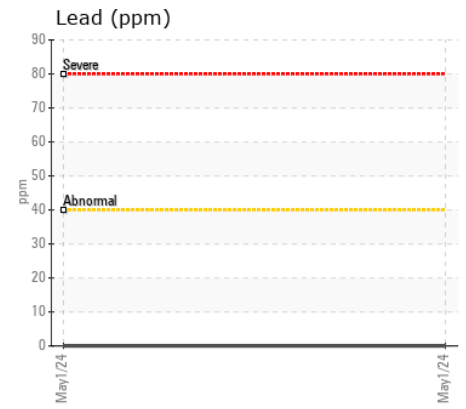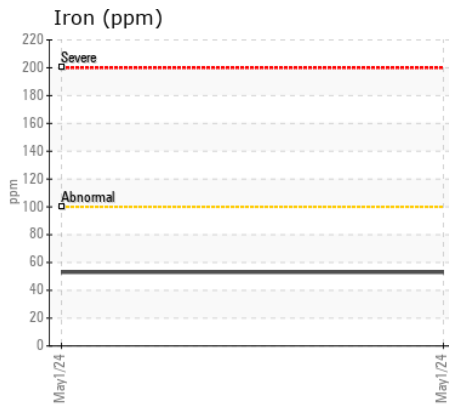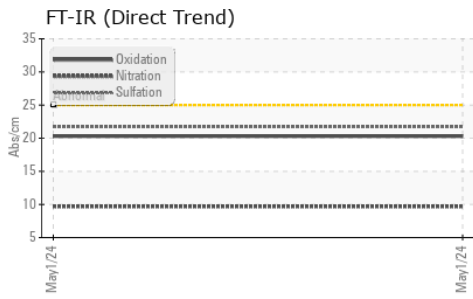

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0020572 **Received** : 21 May 2024
Lab Number : 02636576 **Tested** : 22 May 2024
Unique Number : 5785738 **Diagnosed** : 22 May 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV40, VI)

DISTRIBUTION MARCEL ET FILS
 2287 BOUL. ST PAUL
 CHICOUTIMI, QC
 CA G7K 1E5
 Contact: Service Manager
 jeanpaul@distributionmarceletfils.com
 T: (418)543-4858
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.