



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MITSUBISHI CVT
 Component
Transmission (Auto)
 Fluid
MITSUBISHI J4 CVT TRANS FLUID (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PP0001080	---	---
Sample Date		Client Info		20 May 2024	---	---
Machine Age	hrs	Client Info		350000	---	---
Oil Age	hrs	Client Info		25000	---	---
Filter Age	hrs	Client Info		25000	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	61	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	11	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>225	4	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	17	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185(m)		1	---	---
Boron	ppm	ASTM D5185(m)	140	124	---	---
Barium	ppm	ASTM D5185(m)	0	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	1	2	---	---
Calcium	ppm	ASTM D5185(m)	280	288	---	---
Phosphorus	ppm	ASTM D5185(m)	290	297	---	---
Zinc	ppm	ASTM D5185(m)	0	7	---	---
Sulfur	ppm	ASTM D5185(m)	980	923	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		1.01	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.3	25.3	---	---

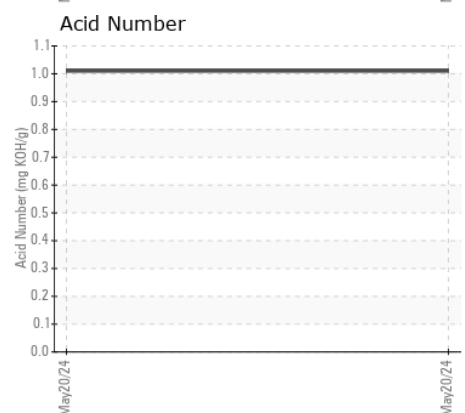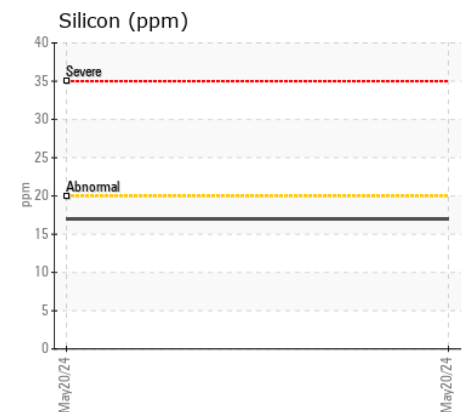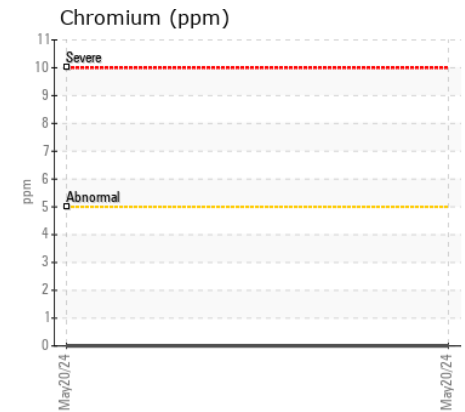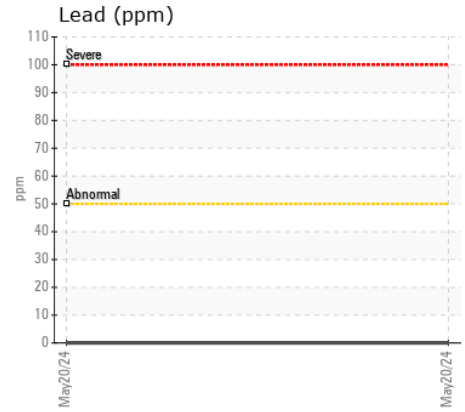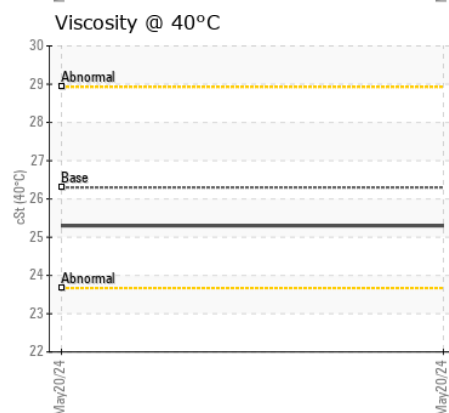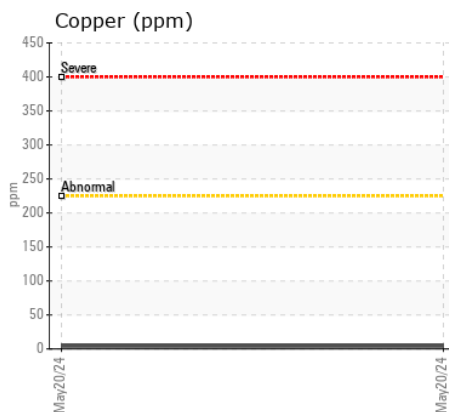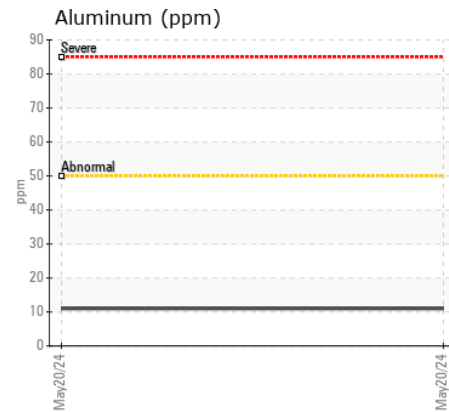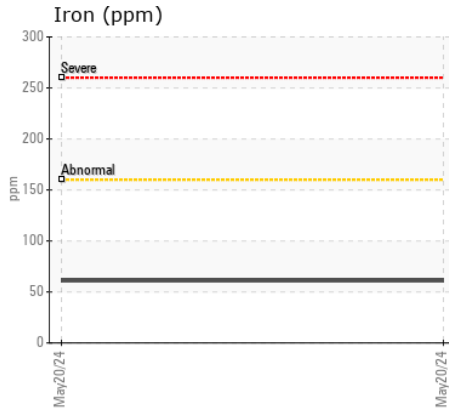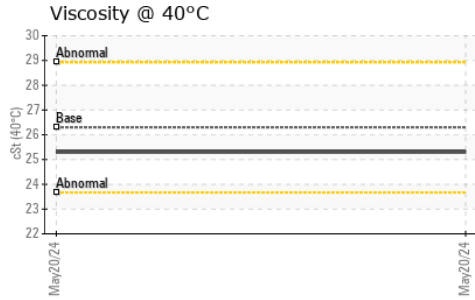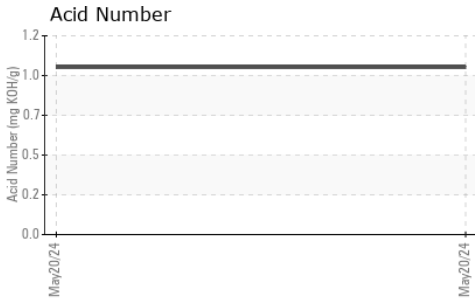

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PP0001080 **Received** : 21 May 2024
Lab Number : 02636702 **Tested** : 22 May 2024
Unique Number : 5785864 **Diagnosed** : 22 May 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: TAN Man)

NSIRI MOHAMED AMMAR
 1412-35 CHARKES ST W
 TORONTO, ON
 CA M4Y 1R6
 Contact: Nsiri Mohamed Ammar
 nsirimohamedammar@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: