



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
OR483
Component
Front Differential
Fluid
APRIL SUPERFLO TDH PLUS (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0114951	GFL0114949	GFL0089196
Sample Date		Client Info		15 May 2024	05 Apr 2024	01 Feb 2024
Machine Age	hrs	Client Info		12751	12523	12231
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>420	7	6	5
Chromium	ppm	ASTM D5185(m)	>4	0	0	0
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>95	76	65	47
Copper	ppm	ASTM D5185(m)	>170	11	9	6
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>35	1	1	2
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	VLITE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)		6	6	4
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		18	18	18
Calcium	ppm	ASTM D5185(m)		3256	3362	3270
Phosphorus	ppm	ASTM D5185(m)		1223	1255	1252
Zinc	ppm	ASTM D5185(m)		1279	1308	1276
Sulfur	ppm	ASTM D5185(m)		3385	3655	3833
Visc @ 40°C	cSt	ASTM D7279(m)	53.5	41.0	40.9	41.7

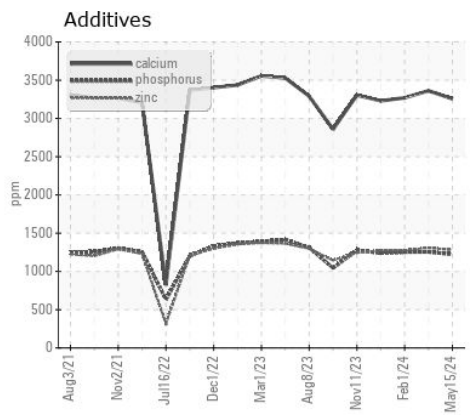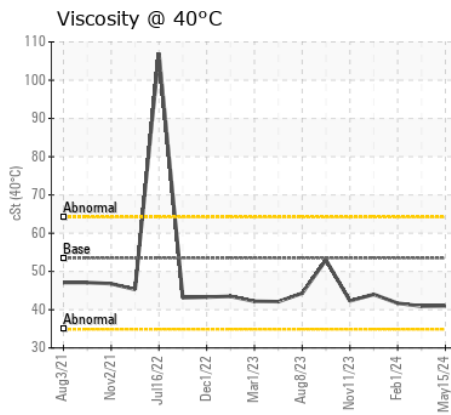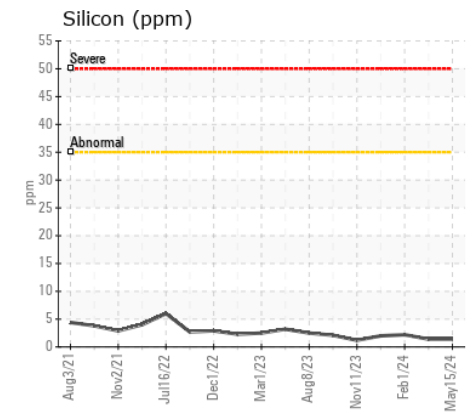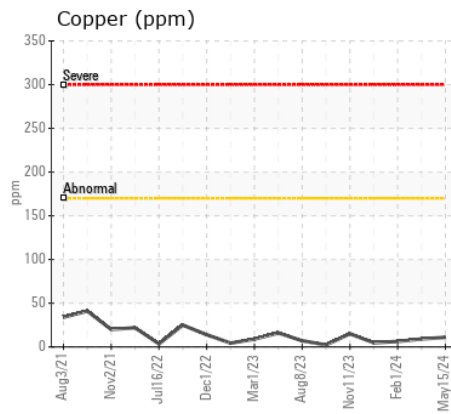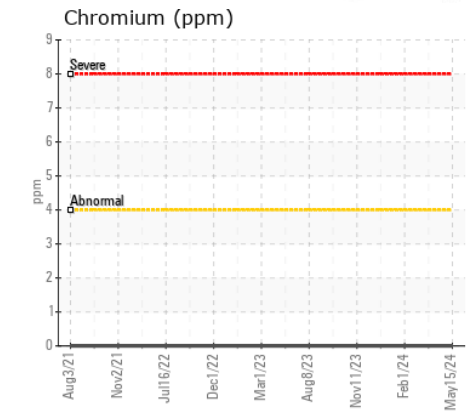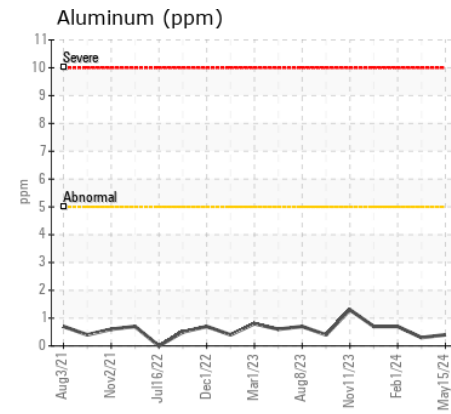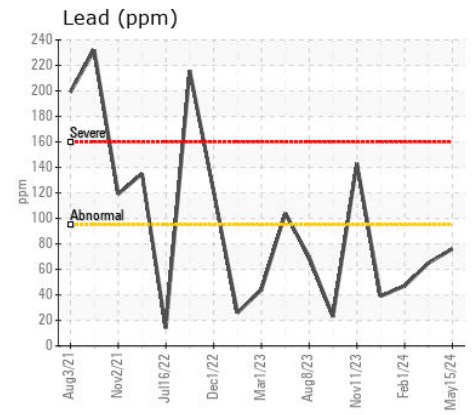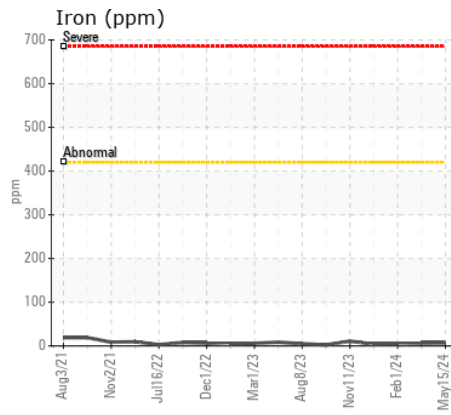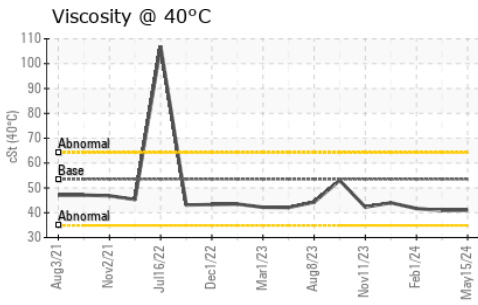

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0114951
Lab Number : 02636705
Unique Number : 5785867
Test Package : MOB 1

Received : 21 May 2024
Tested : 21 May 2024
Diagnosed : 21 May 2024 - Wes Davis

GFL Environmental - 784 - Saint-Hyacinthe
 3525 Boul. Laurier Est.,
 Saint-Hyacinthe, QC
 CA J2R 2B2
 Contact: Nadine Authier
 nauthier@matrec.ca
 T: (450)773-9689
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.