



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
425005
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0080093	GFL0044765	GFL0044756
Sample Date		Client Info		04 Apr 2024	14 Mar 2023	09 Jan 2023
Machine Age	hrs	Client Info		24095	21569	21036
Oil Age	hrs	Client Info		600	600	600
Filter Age	hrs	Client Info		600	600	600
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	17	4	14
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	1
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	1	<1	2
Lead	ppm	ASTM D5185(m)	>40	0	0	1
Copper	ppm	ASTM D5185(m)	>330	2	<1	6
Tin	ppm	ASTM D5185(m)	>15	<1	0	1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	4	4
Potassium	ppm	ASTM D5185(m)	>20	3	<1	1
Fuel		WC Method	>6.0	<1.0	0.5	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.3	0	0
Nitration	Abs/cm	ASTM D7624*	>20	9.5	4.6	9.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.4	20.4	21.5
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	2	4
Boron	ppm	ASTM D5185(m)	0	28	8	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	25	49	58
Manganese	ppm	ASTM D5185(m)	0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	750	779	977
Calcium	ppm	ASTM D5185(m)	1070	1360	901	1120
Phosphorus	ppm	ASTM D5185(m)	1150	817	952	1090
Zinc	ppm	ASTM D5185(m)	1270	956	1022	1219
Sulfur	ppm	ASTM D5185(m)	2060	2549	2404	2544
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.4	12.5	18.0
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.8	12.4	13.7

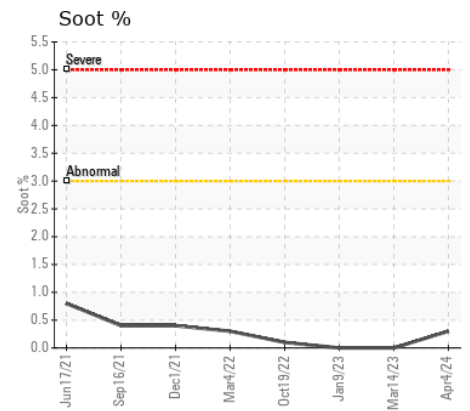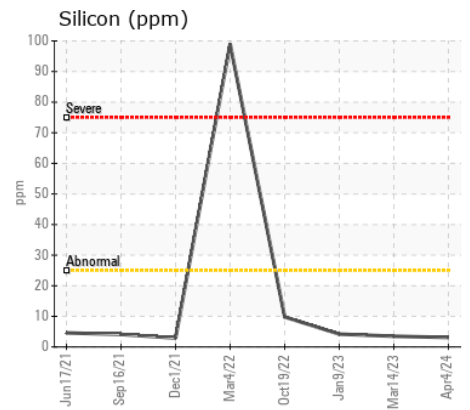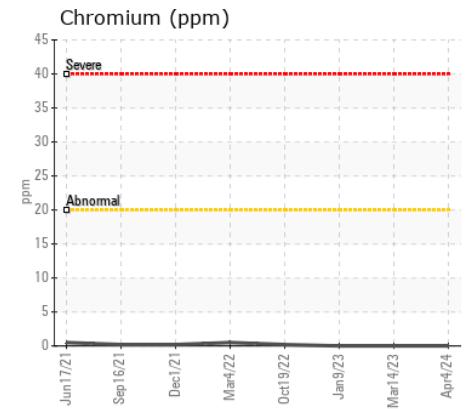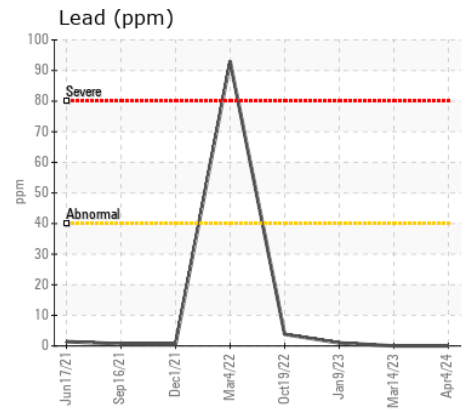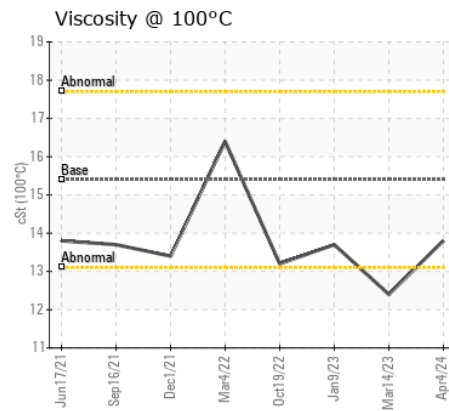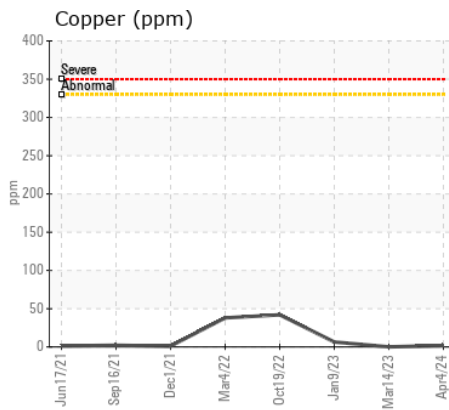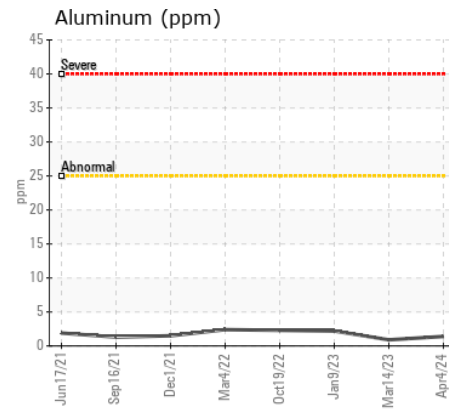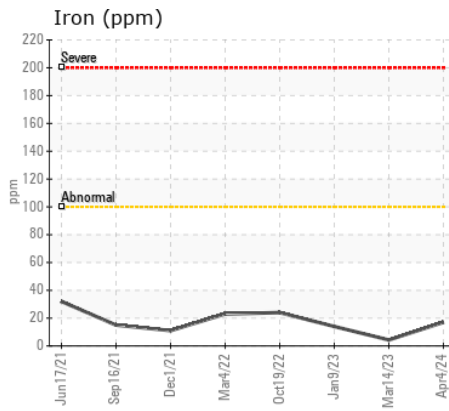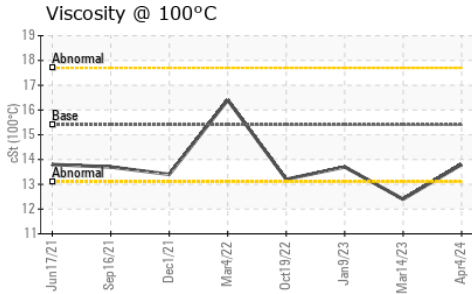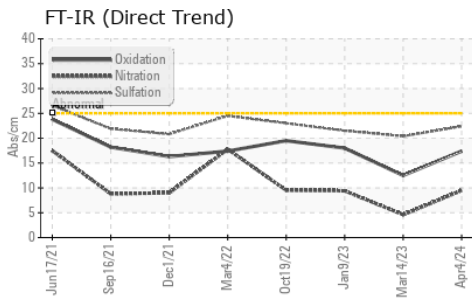

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0080093
Lab Number : 02636837
Unique Number : 5785999
Test Package : MOB 1
Received : 22 May 2024
Tested : 22 May 2024
Diagnosed : 22 May 2024 - Wes Davis

GFL Environmental - 577 - First Class
 8540 Chilliwack Mountain Rd,
 Chilliwack, BC
 CA V2R 3W8
 Contact: Derek Jessop
 djessop@gflenv.com
 T: (604)798-5301
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.