



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
833075
Component
Diesel Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0096810	---	---
Sample Date		Client Info		07 May 2024	---	---
Machine Age	kms	Client Info		24343	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		1200	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	23	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	5	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	6	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	11.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	27.0	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		10	---	---
Boron	ppm	ASTM D5185(m)	50	5	---	---
Barium	ppm	ASTM D5185(m)	5	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	50	61	---	---
Manganese	ppm	ASTM D5185(m)	0	3	---	---
Magnesium	ppm	ASTM D5185(m)	560	588	---	---
Calcium	ppm	ASTM D5185(m)	1510	1591	---	---
Phosphorus	ppm	ASTM D5185(m)	780	701	---	---
Zinc	ppm	ASTM D5185(m)	870	923	---	---
Sulfur	ppm	ASTM D5185(m)	2040	2079	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	21.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.1	---	---

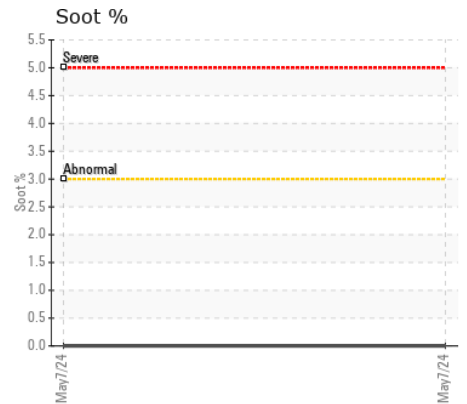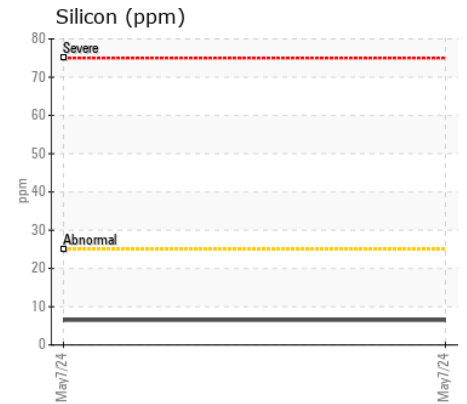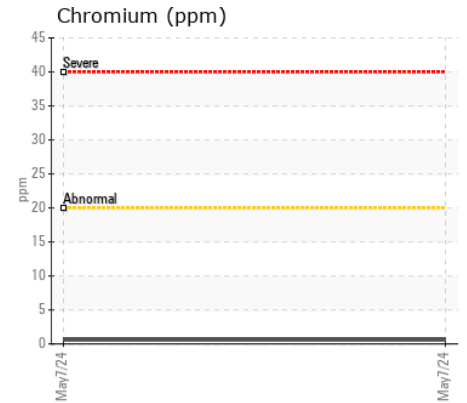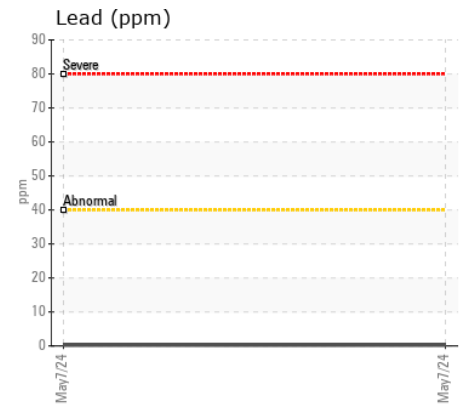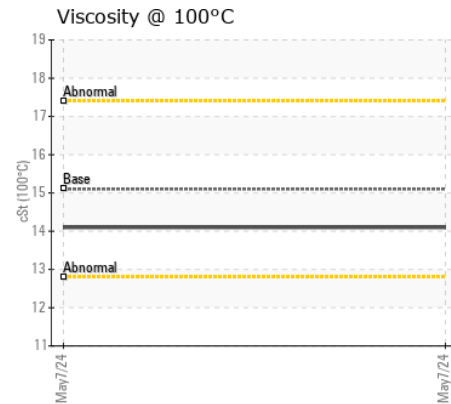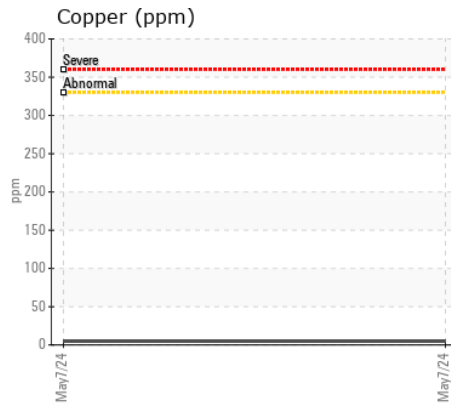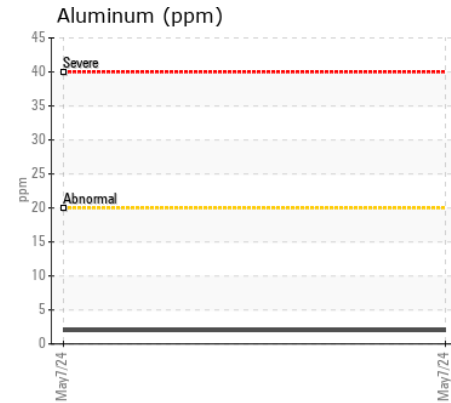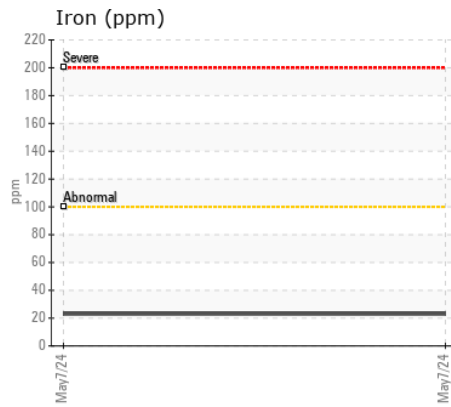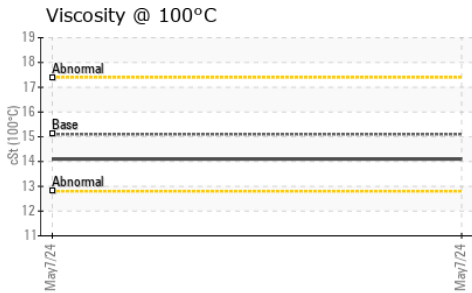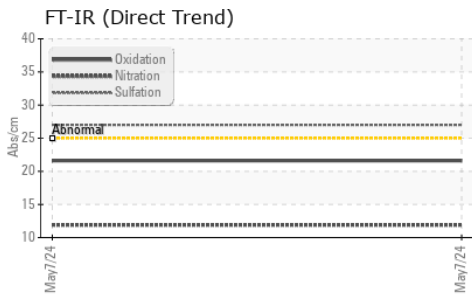

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0096810
Lab Number : 02636878
Unique Number : 5786040
Test Package : MOB 1
Received : 22 May 2024
Tested : 22 May 2024
Diagnosed : 22 May 2024 - Wes Davis

GFL Environmental - 574 - Vancouver Fleet
 70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Sanjay Kisun
 skisun@gflenv.com
 T: (604)529-4030
 F: (604)529-4026

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.