



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50M 151293-1216
Component
Transmission (Manual)
Fluid
TDTO FLUID SAE 10W (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDTO FLUID SAE 10W. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0290915	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		1496	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	23	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>7	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	4	---	---
Lead	ppm	ASTM D5185(m)	>45	<1	---	---
Copper	ppm	ASTM D5185(m)	>225	31	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>125	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		46	---	---
Boron	ppm	ASTM D5185(m)	37	4	---	---
Barium	ppm	ASTM D5185(m)	7	2	---	---
Molybdenum	ppm	ASTM D5185(m)	5	0	---	---
Manganese	ppm	ASTM D5185(m)		47	---	---
Magnesium	ppm	ASTM D5185(m)	40	8	---	---
Calcium	ppm	ASTM D5185(m)	2650	3227	---	---
Phosphorus	ppm	ASTM D5185(m)	1050	1078	---	---
Zinc	ppm	ASTM D5185(m)	1075	1135	---	---
Sulfur	ppm	ASTM D5185(m)	5750	7841	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	40	43.8	---	---

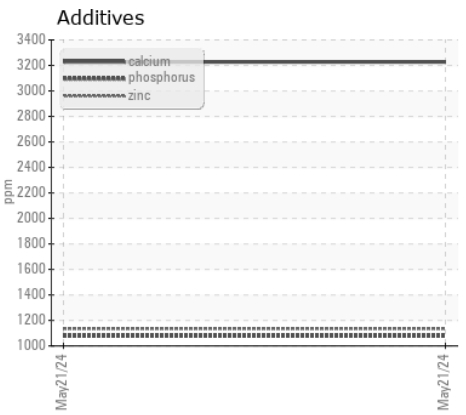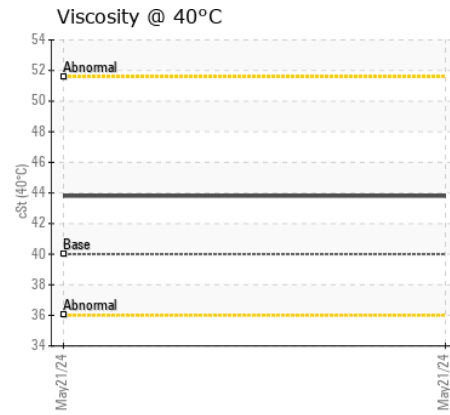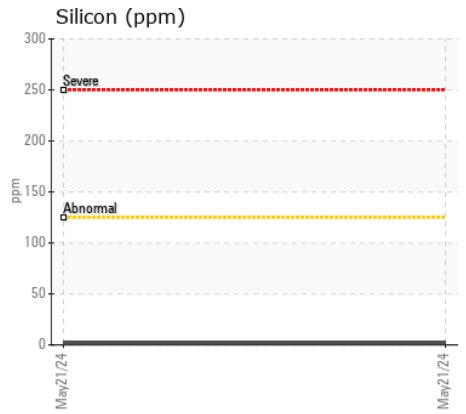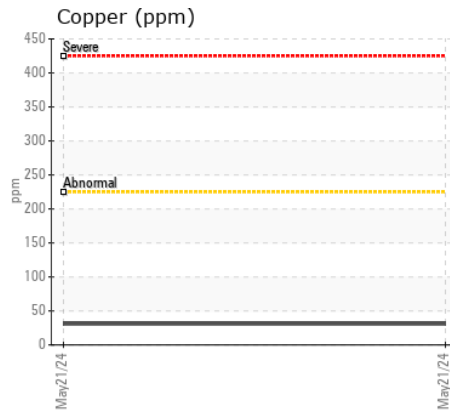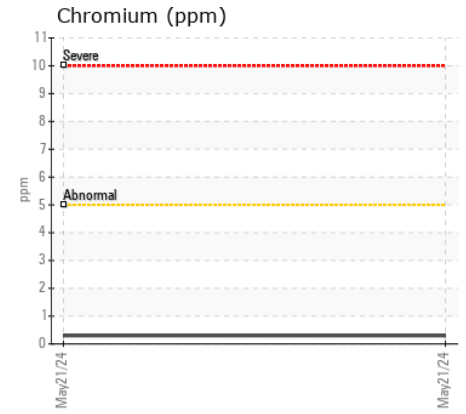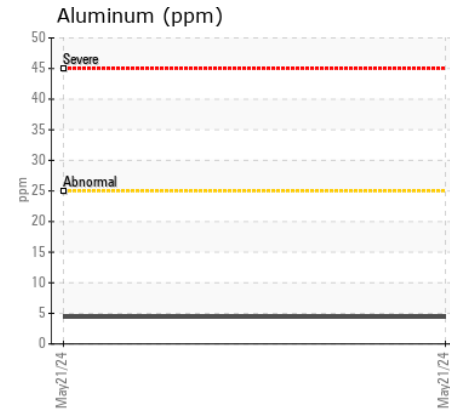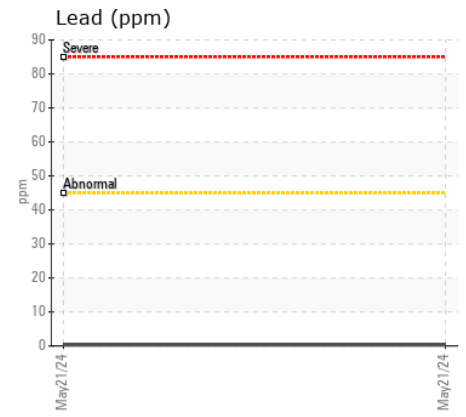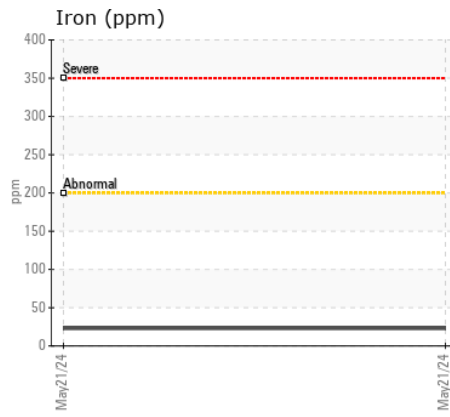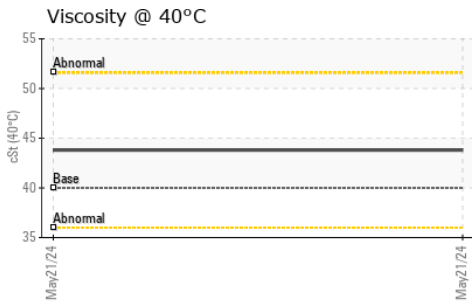

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0290915 **Received** : 22 May 2024
Lab Number : 02636989 **Tested** : 22 May 2024
Unique Number : 5786151 **Diagnosed** : 22 May 2024 - Wes Davis
Test Package : MOB 1

1625066 ONTARIO LTD.
 870 MACKAY RD
 PICKERING, ON
 CA L1W 2Y4
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: