



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[234121]

Machine Id

NAVISTAR 203005

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CU0022802	---	---
Sample Date		Client Info		15 Mar 2024	---	---
Machine Age	hrs	Client Info		3669	---	---
Oil Age	hrs	Client Info		200	---	---
Filter Age	hrs	Client Info		200	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	12	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

## CONTAMINATION











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	7	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.0	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	---	---
Boron	ppm	ASTM D5185(m)	2	10	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	50	62	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	950	966	---	---
Calcium	ppm	ASTM D5185(m)	1050	1077	---	---
Phosphorus	ppm	ASTM D5185(m)	995	1010	---	---
Zinc	ppm	ASTM D5185(m)	1180	1184	---	---
Sulfur	ppm	ASTM D5185(m)	2600	2602	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	10.4	---	---

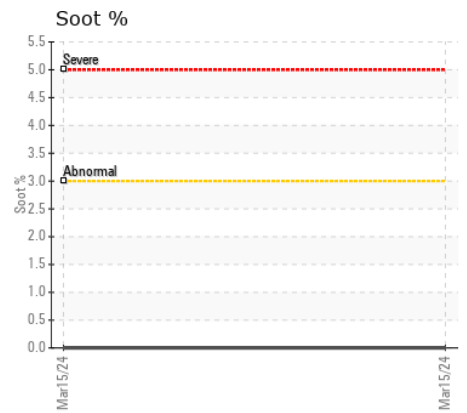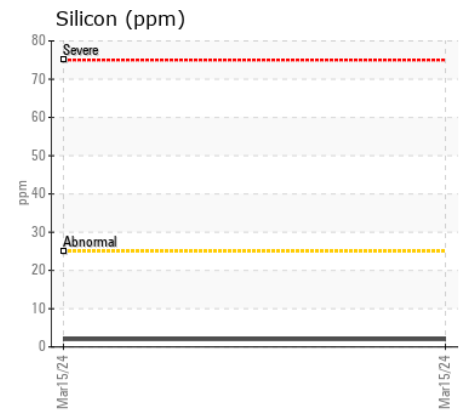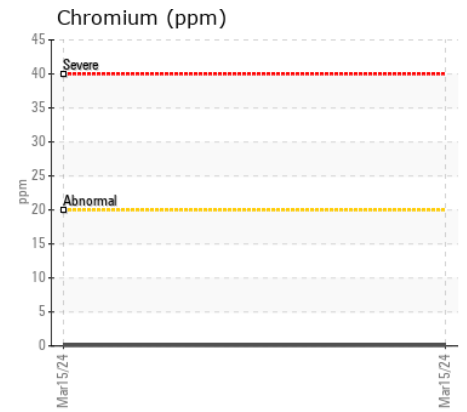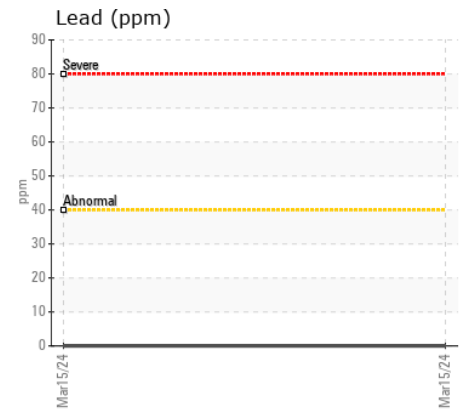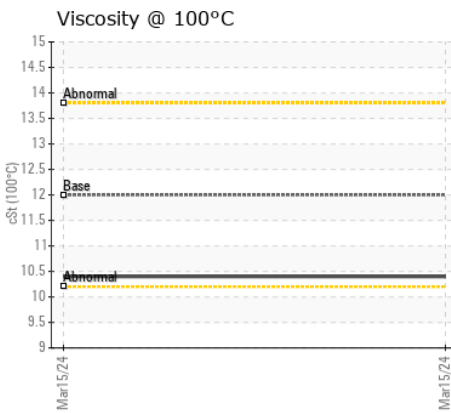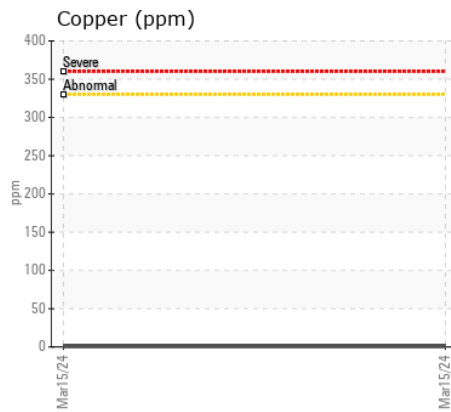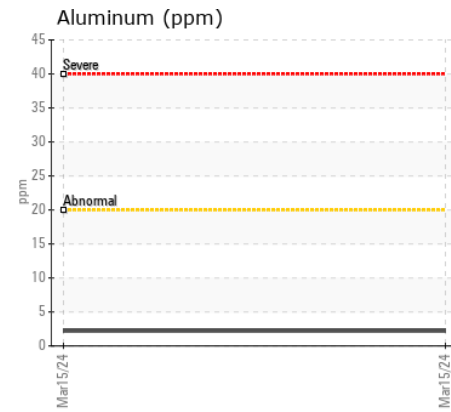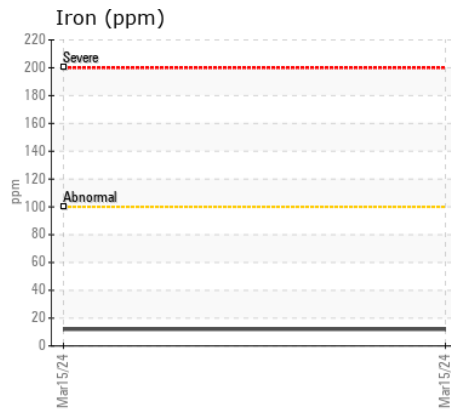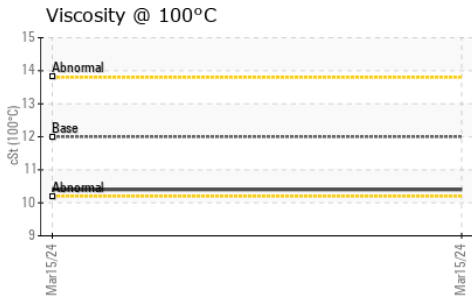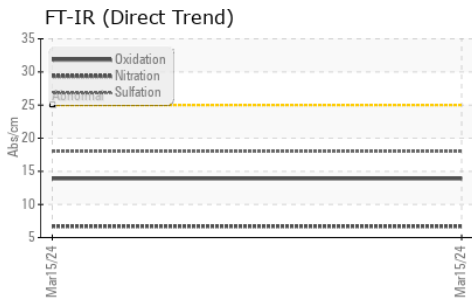

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CU0022802 **Received** : 23 May 2024  
**Lab Number** : 02637044 **Tested** : 23 May 2024  
**Unique Number** : 5786206 **Diagnosed** : 23 May 2024 - Wes Davis  
**Test Package** : MOB 1

**CITY OF TORONTO**  
 150 DISCO RD.  
 TORONTO, ON  
 CA M9W 1M1  
 Contact: Service Manager  
 disco@napacanada.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.