



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CR 3112 No. 2 Stb. S/S Gen. Engine
Component
Starboard Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (68 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0844560	WC0844559	WC0844566
Sample Date		Client Info		13 May 2024	14 Apr 2024	24 Mar 2024
Machine Age	hrs	Client Info		96963	96462	514
Oil Age	hrs	Client Info		500	500	514
Filter Age	hrs	Client Info		500	500	514
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>86	13	17	15
Chromium	ppm	ASTM D5185(m)	>3	0	0	0
Nickel	ppm	ASTM D5185(m)	>3	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<1	2	<1
Lead	ppm	ASTM D5185(m)	>16	0	<1	<1
Copper	ppm	ASTM D5185(m)	>250	2	3	2
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>35	2	2	3
Potassium	ppm	ASTM D5185(m)	>20	0	<1	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	8.0	9.0	8.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.8	21.5	21.1
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	1	2
Boron	ppm	ASTM D5185(m)	0	8	11	8
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	59	64	63
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	980	1057	1039
Calcium	ppm	ASTM D5185(m)	1070	1013	1107	1130
Phosphorus	ppm	ASTM D5185(m)	1150	957	1025	1009
Zinc	ppm	ASTM D5185(m)	1270	1174	1270	1263
Sulfur	ppm	ASTM D5185(m)	2060	2368	2469	2444
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.6	20.1	19.0
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	14.6	14.8	14.9

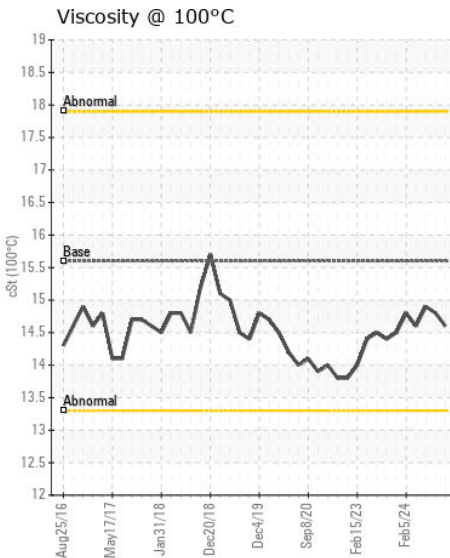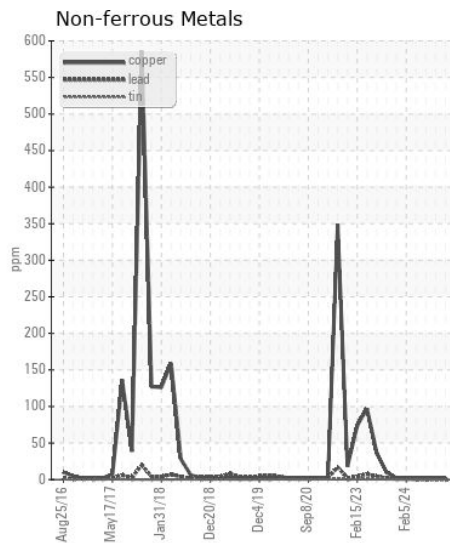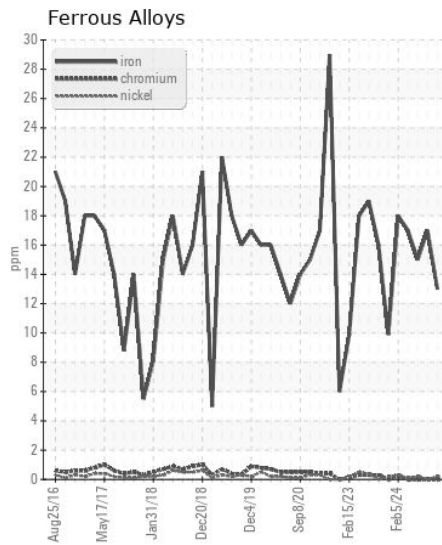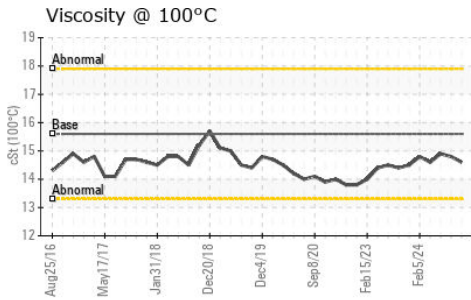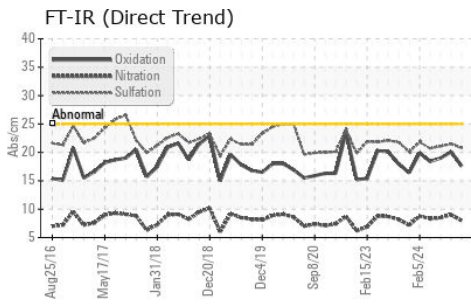

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0844560
Lab Number : 02637125
Unique Number : 5786287
Test Package : MAR 1

Received : 23 May 2024
Tested : 23 May 2024
Diagnosed : 23 May 2024 - Wes Davis

CANADIAN COAST GUARD
 CCGS CAPE ROGER, PO BOX 5667
 ST. JOHN'S, NL
 CA A1C 5X1
 Contact: Chief Engineer
 caperogerce@crg.ccgcs-ngcc.gc.ca
 T: (709)685-6843
 F: (709)685-6059

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.