



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
NO UNIT WC0941331
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | WC0941331 | --- | --- |
| Sample Date | | Client Info | | 22 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 0 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|----------|-----|---------------|------|----|-----|-----|
| Iron | ppm | ASTM D5185(m) | >100 | 14 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >20 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >4 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | >3 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >20 | 13 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >40 | 0 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >330 | 25 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |

CONTAMINATION












There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|---------------|------|------|-----|-----|
| Silicon | ppm | ASTM D5185(m) | >25 | 6 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 6 | --- | --- |
| Fuel | | WC Method | >5 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | % | ASTM D7922* | | 0.0 | --- | --- |
| Soot % | % | ASTM D7844* | >3 | 0.2 | --- | --- |
| Nitration | Abs/cm | ASTM D7624* | >20 | 8.4 | --- | --- |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 22.9 | --- | --- |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|--------------|----------|---------------|-----|------|-----|-----|
| Sodium | ppm | ASTM D5185(m) | | 69 | --- | --- |
| Boron | ppm | ASTM D5185(m) | | 40 | --- | --- |
| Barium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | | 42 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | | 449 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | | 1670 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | | 706 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | | 855 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | | 1940 | --- | --- |
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 21.1 | --- | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | | 13.8 | --- | --- |

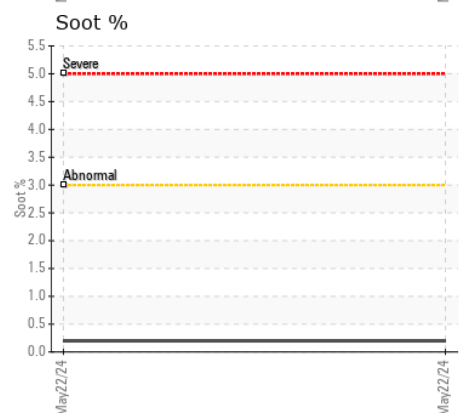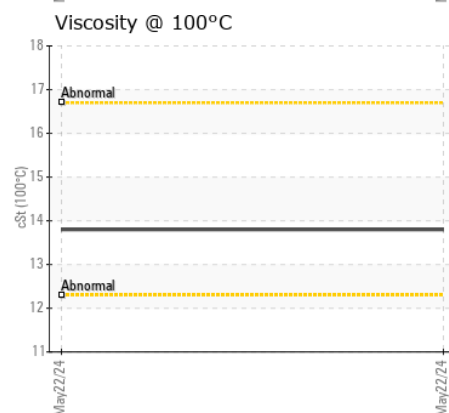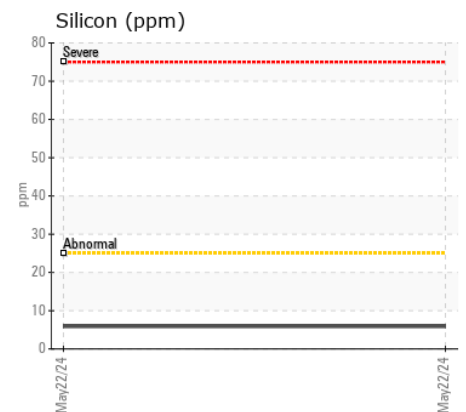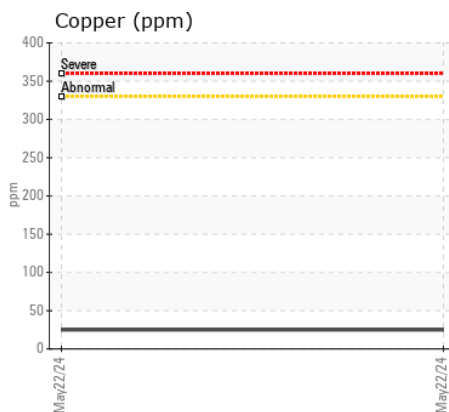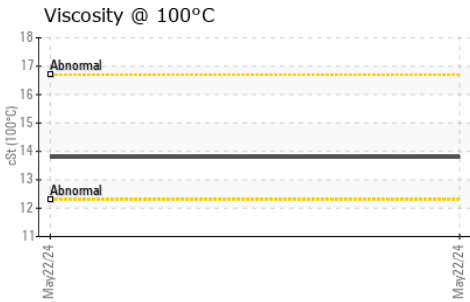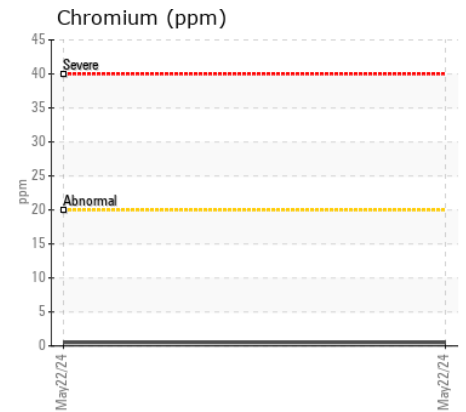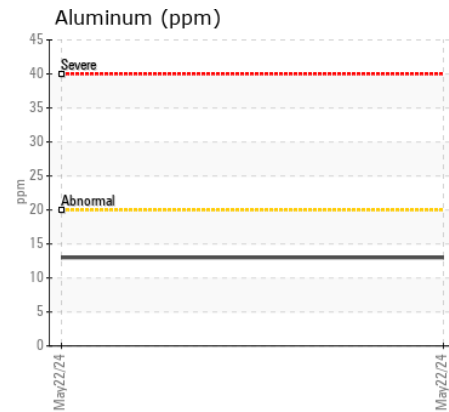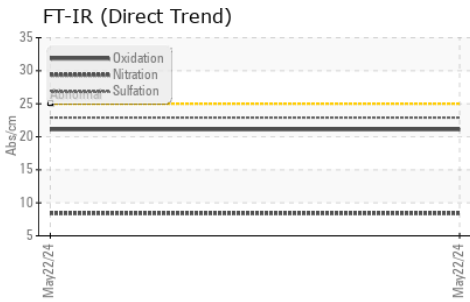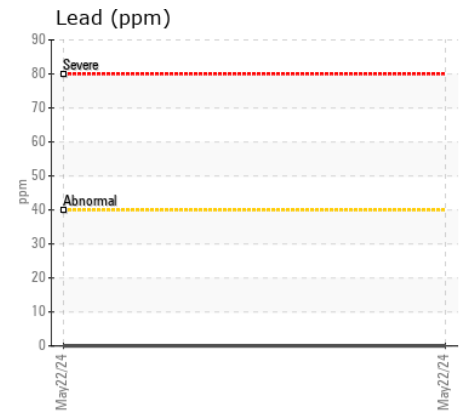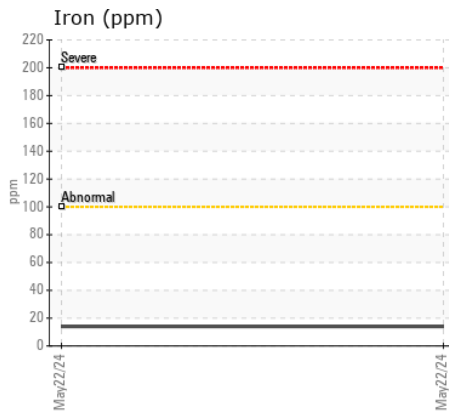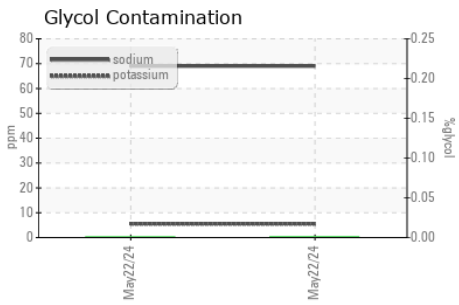

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0941331 **Received** : 23 May 2024
Lab Number : **02637135** **Tested** : 24 May 2024
Unique Number : 5786297 **Diagnosed** : 24 May 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

OX FLEET CARE
 466 HIGHWAY 52
 DUNDAS, ON
 CA L9H 5E2

Contact: Robert Hughes
 robert.hughes@ox-equipment.com
 T: (289)683-6037
 F: