



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**622343**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 30 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP</b>	---	---
Sample Date		Client Info		<b>22 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>8</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>10	<b>7</b>	---	---
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>19</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.1</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>22.4</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>75	<b>3</b>	---	---
Boron	ppm	ASTM D5185(m)	250	<b>30</b>	---	---
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	100	<b>38</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	450	<b>484</b>	---	---
Calcium	ppm	ASTM D5185(m)	3000	<b>1597</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>871</b>	---	---
Zinc	ppm	ASTM D5185(m)	1350	<b>1029</b>	---	---
Sulfur	ppm	ASTM D5185(m)	4250	<b>2252</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>19.7</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>12.4</b>	---	---

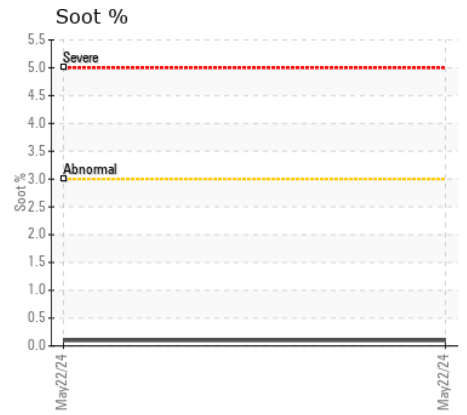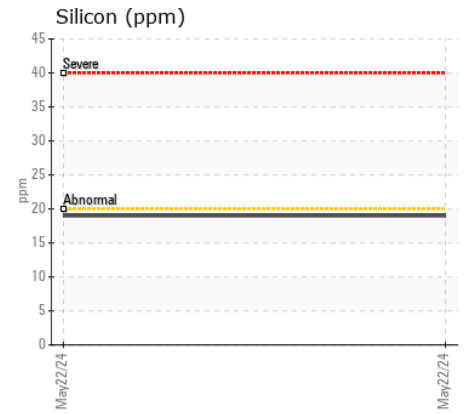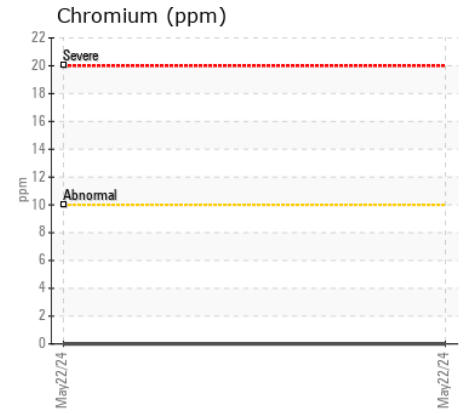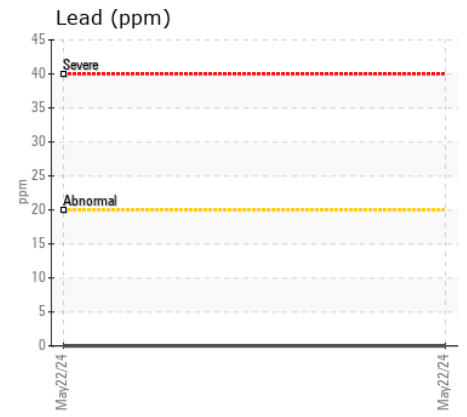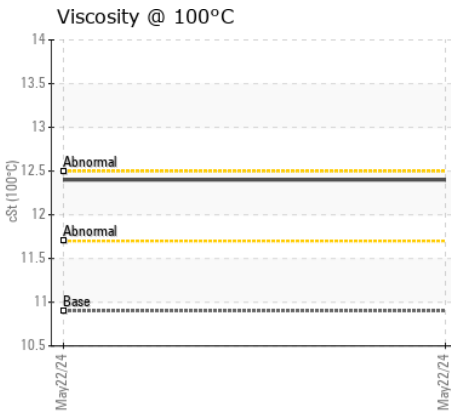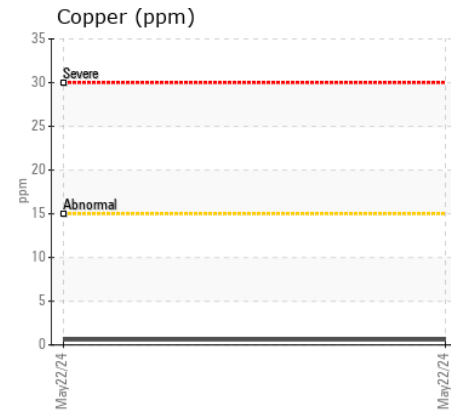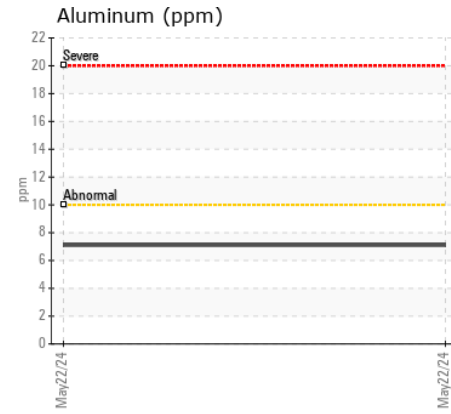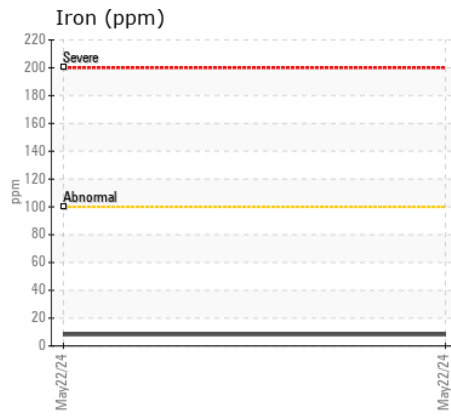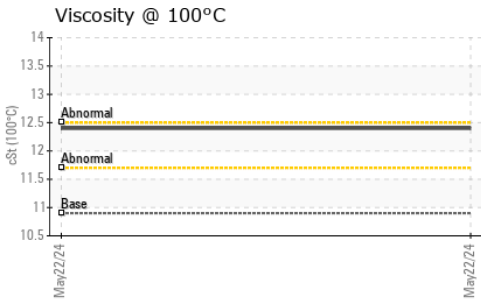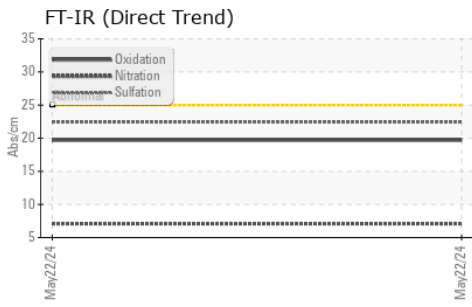

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : VCP  
 Lab Number : 02637136  
 Unique Number : 5786298  
 Test Package : MOB 1

Received : 23 May 2024  
 Tested : 23 May 2024  
 Diagnosed : 23 May 2024 - Wes Davis

**CRH CANADA GROUP INC.**  
 P.O. BOX 5400  
 CONCORD, ON  
 CA L4K 1B6  
 Contact: Dan Brown  
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: