



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FRC Davit - Hydraulic Oil
 Component
Hydraulic System
 Fluid
ESSO NUTO H ISO 46 (340 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MAR 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid. this testkit includes AN to determine the suitability of the oil for continued use.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

The condition of the oil is acceptable for the time in service (unconfirmed).

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0807875	WC0676972	WC0471590
Sample Date		Client Info		04 May 2024	26 Apr 2022	31 May 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>20	0	<1	<1
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>10	0	0	<1
Lead	ppm	ASTM D5185(m)	>20	0	<1	<1
Copper	ppm	ASTM D5185(m)	>20	2	2	<1
Tin	ppm	ASTM D5185(m)	>10	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>15	0	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	1	<1
Water		WC Method	>0.05	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<1	0	<1
Boron	ppm	ASTM D5185(m)	0	0	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	5	<1	<1	<1
Calcium	ppm	ASTM D5185(m)	50	41	49	46
Phosphorus	ppm	ASTM D5185(m)	330	264	331	315
Zinc	ppm	ASTM D5185(m)	410	369	416	413
Sulfur	ppm	ASTM D5185(m)	2700	755	877	906
Visc @ 40°C	cSt	ASTM D7279(m)	46	45.0	46.9	45.2

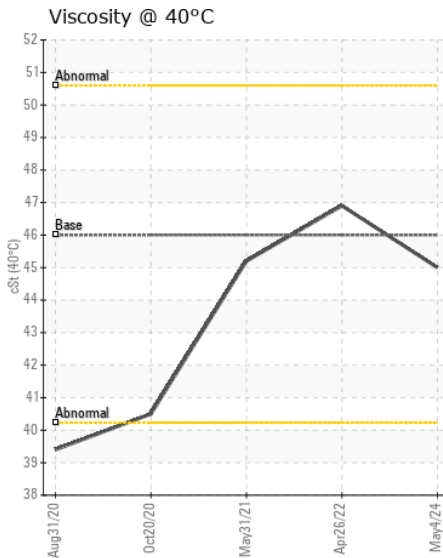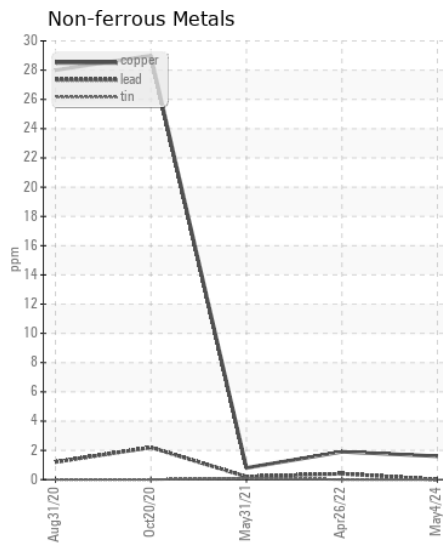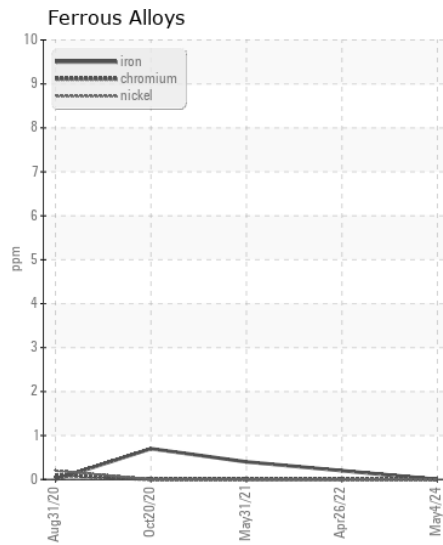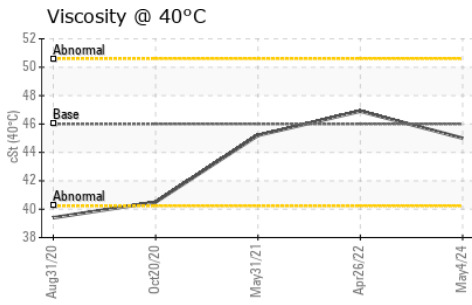

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0807875
Lab Number : 02637152
Unique Number : 5786314
Test Package : MAR 1
Received : 23 May 2024
Tested : 23 May 2024
Diagnosed : 23 May 2024 - Wes Davis

CANADIAN COAST GUARD
 CCGS HENRY LARSEN, P.O. BOX 5667, 280 SOUTHSIDE RD.
 ST. JOHN'S, NL
 CA A1C 5X1
 Contact: Chief Engineer
 henrylarsence@ccgs-ngcc.gc.ca
 T: (709)687-5198
 F: (709)685-3187

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.