



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**HL23222 Stbd Shaft Pedestal Bearing**  
Component  
**Starboard Bearing**  
Fluid  
**MOBIL DTE OIL HVY MEDIUM (18 LTR)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0807865</b>	WC0709122	WC0676977
Sample Date		Client Info		<b>30 Apr 2024</b>	21 Mar 2023	29 Apr 2022
Machine Age	hrs	Client Info		<b>0</b>	71760	68896
Oil Age	hrs	Client Info		<b>0</b>	0	6392
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>None</b>	None	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>25	<b>2</b>	2	1
Copper	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Calcium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Phosphorus	ppm	ASTM D5185(m)		<b>117</b>	8	9
Zinc	ppm	ASTM D5185(m)		<b>89</b>	9	10
Sulfur	ppm	ASTM D5185(m)		<b>1399</b>	5476	5710
Visc @ 40°C	cSt	ASTM D7279(m)	65.1	<b>67.5</b>	97.1	96.5

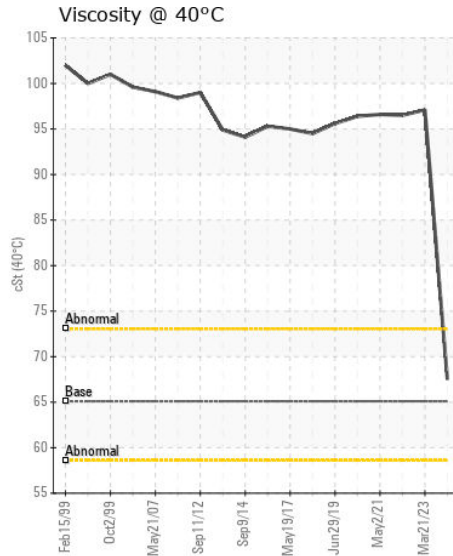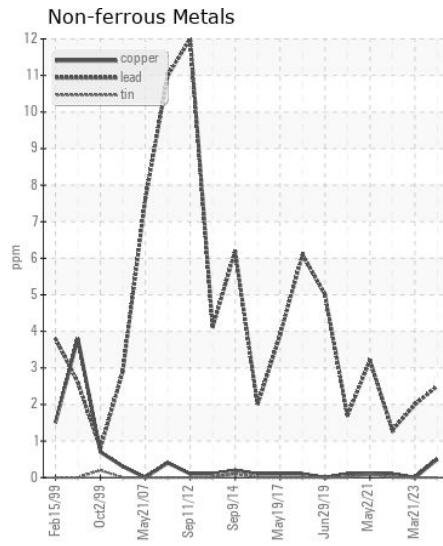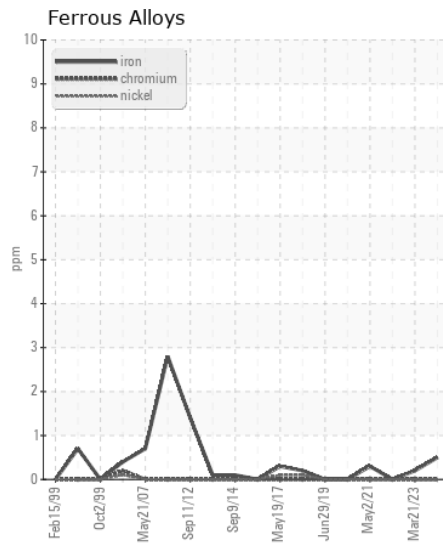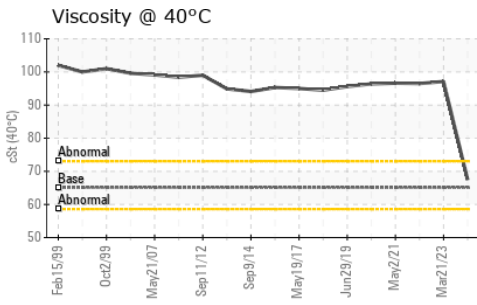

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

**Sample No.** : WC0807865

**Lab Number** : 02637302

**Unique Number** : 5786464

**Test Package** : MAR 1

**Received** : 23 May 2024

**Tested** : 24 May 2024

**Diagnosed** : 24 May 2024 - Wes Davis

**CANADIAN COAST GUARD**

CCGS HENRY LARSEN, P.O. BOX 5667, 280 SOUTHSIDE RD.

ST. JOHN'S, NL

CA A1C 5X1

Contact: Chief Engineer

henrylarsence@ccgs-ngcc.gc.ca

T: (709)687-5198

F: (709)685-3187

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.