



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINANTS	ABNORMAL
OIL CONDITION	NORMAL



Machine Id
MCI 5607
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

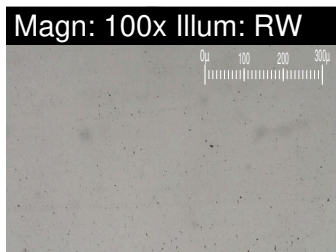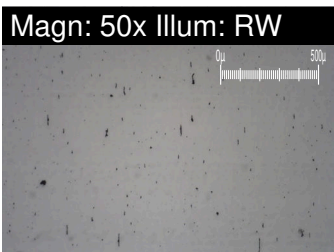

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0939760	WC0308096	WC0308084
Sample Date		Client Info		16 May 2024	18 Jan 2019	27 Nov 2018
Machine Age	kms	Client Info		749867	124197	100231
Oil Age	kms	Client Info		0	24000	24000
Filter Age	kms	Client Info		0	24000	24000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

PQ		ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m)	>100	24	10	11
Chromium	ppm	ASTM D5185(m)	>20	2	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)		<1	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	1	<1
Lead	ppm	ASTM D5185(m)	>40	3	<1	2
Copper	ppm	ASTM D5185(m)	>330	114	7	29
Tin	ppm	ASTM D5185(m)	>15	<1	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Large Particles		DR-Ferr*		6.8	---	---
Small Particles		DR-Ferr*		5.9	---	---
Total Particles		DR-Ferr*	>---	12.7	---	---
Large Particles Percentage	%	DR-Ferr*		7.1	---	---
Severity Index		DR-Ferr*		6	---	---
Ferrous Rubbing	Scale 0-10	ASTM D7684*		2		
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				

CONTAMINANTS









There is a moderate concentration of dirt present in the oil.

Silicon	ppm	ASTM D5185(m)	>25	▲ 25	9	9
Potassium	ppm	ASTM D5185(m)	>20	2	3	5
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	10.5	10.2	9.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.4	23.6	23.2
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1		
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1		

OIL CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		3	2	4
Boron	ppm	ASTM D5185(m)	250	8	60	77
Barium	ppm	ASTM D5185(m)	10	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	100	14	3	4
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	84	515	57
Calcium	ppm	ASTM D5185(m)	3000	2897	1726	2350
Phosphorus	ppm	ASTM D5185(m)	1150	1053	993	930
Zinc	ppm	ASTM D5185(m)	1350	1307	1208	1196
Sulfur	ppm	ASTM D5185(m)	4250	3156	3032	2749
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.0	18.3	19.8
Base Number (BN)	mg KOH/g	ASTM D2896*	8.5	9.86	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.7	13.7	14.3
Lubricant Degradation	Scale 0-10	ASTM D7684*				

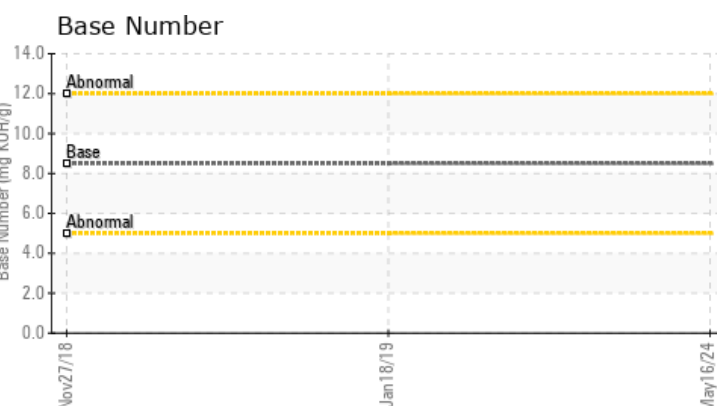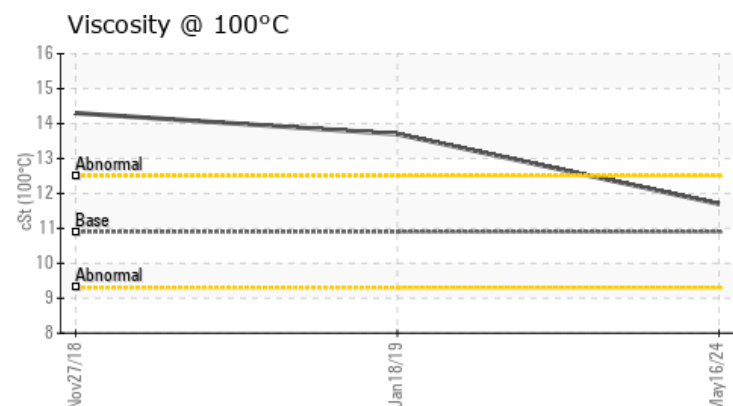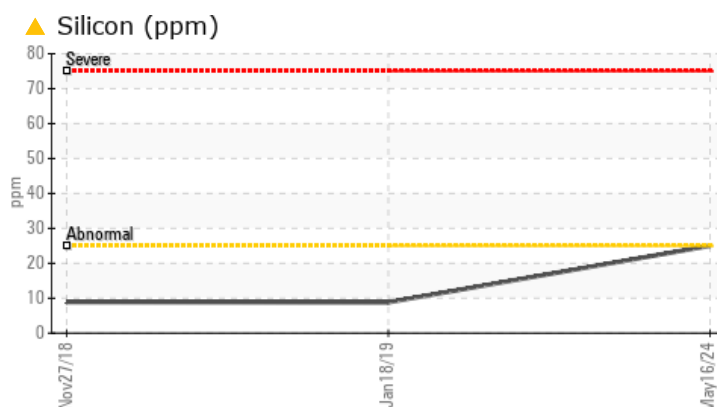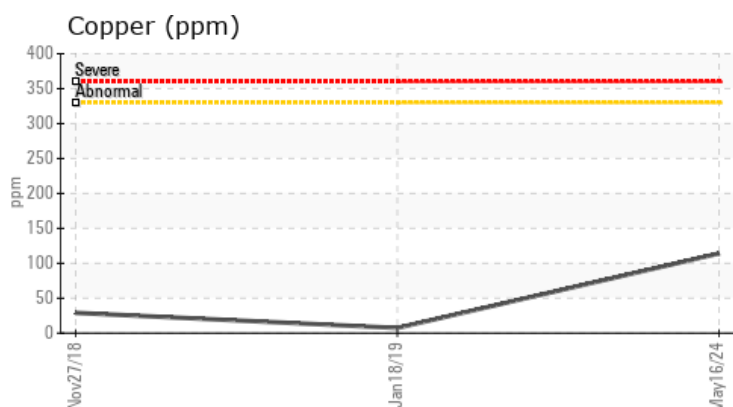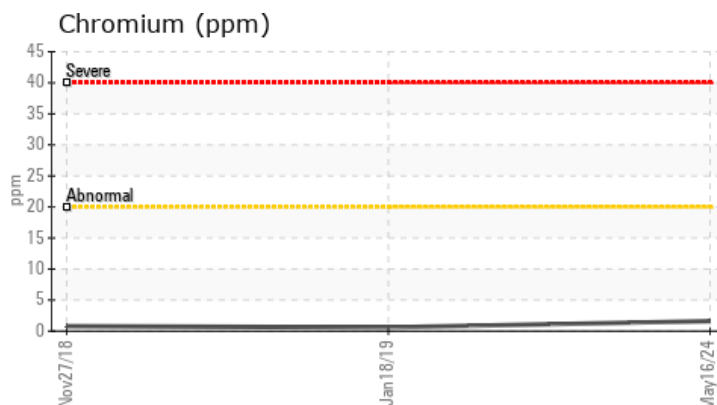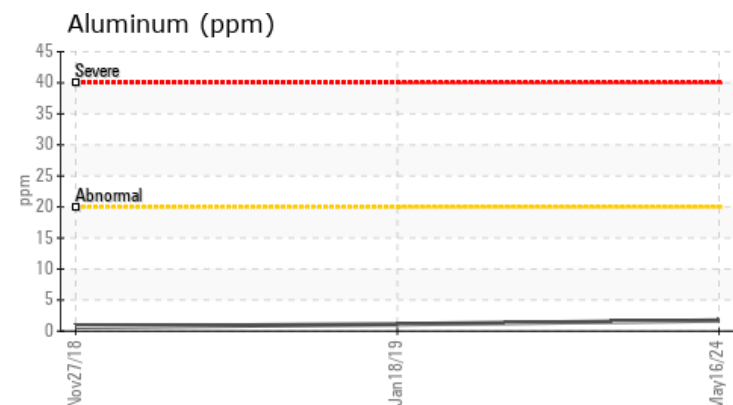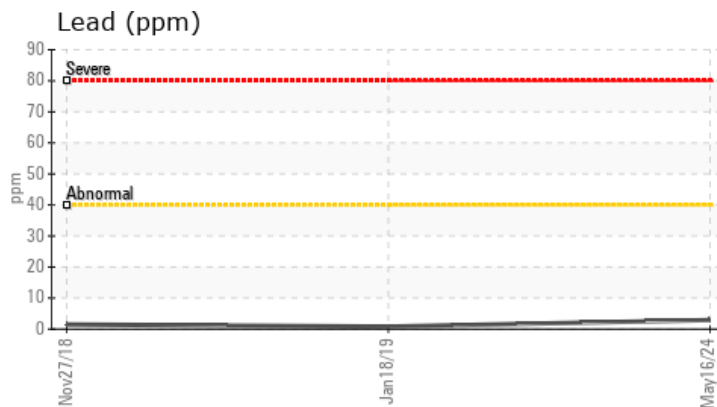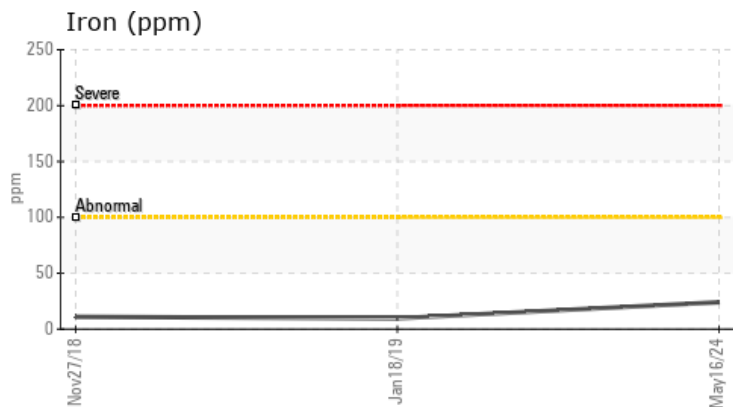

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0939760
Lab Number : 02637350
Unique Number : 5786512
Test Package : MOB 3

Received : 24 May 2024
Tested : 28 May 2024
Diagnosed : 28 May 2024 - Kevin Marson

ONTARIO NORTHLAND GARAGE
 567 WALLACE RD
 NORTH BAY, ON
 CA P1A 3T3
 Contact: Scott Curran
 scott.curran@ontarionorthland.ca
 T: (705)499-5184
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

This page left intentionally blank