



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**INTERNATIONAL 522050**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0122270</b>	GFL0071121	---
Sample Date		Client Info		<b>10 May 2024</b>	09 Feb 2023	---
Machine Age	kms	Client Info		<b>7373</b>	369710	---
Oil Age	kms	Client Info		<b>455</b>	0	---
Filter Age	kms	Client Info		<b>455</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	<b>11</b>	21	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>5</b>	12	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	2	---
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	2	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	4	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	15	---
Fuel		WC Method	>2.0	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	0.3	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.1</b>	9.8	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.4</b>	22.8	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>1</b>	2	---
Boron	ppm	ASTM D5185(m)	0	<b>3</b>	2	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	60	<b>59</b>	63	---
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185(m)	1010	<b>983</b>	1015	---
Calcium	ppm	ASTM D5185(m)	1070	<b>1066</b>	1173	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>962</b>	1106	---
Zinc	ppm	ASTM D5185(m)	1270	<b>1182</b>	1270	---
Sulfur	ppm	ASTM D5185(m)	2060	<b>2442</b>	2442	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.5</b>	17.4	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	<b>13.7</b>	13.2	---

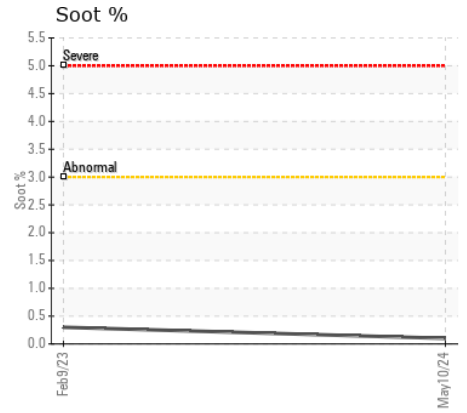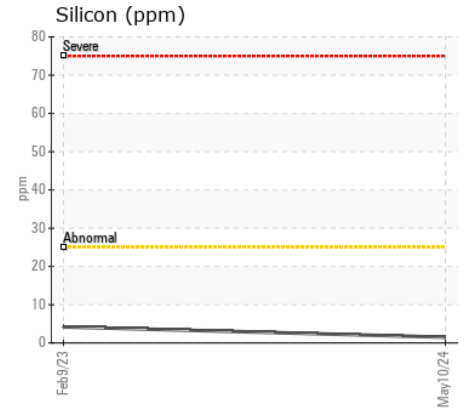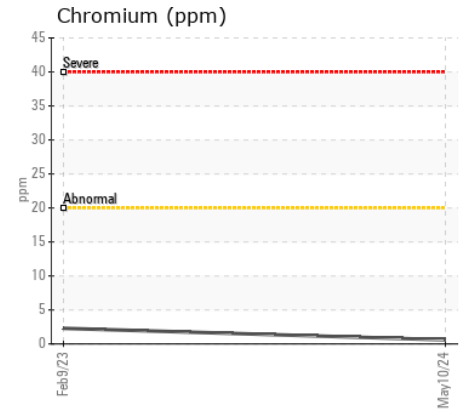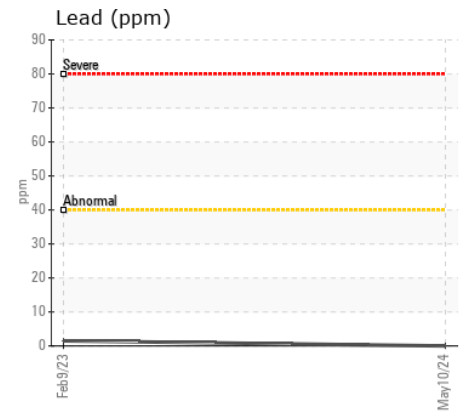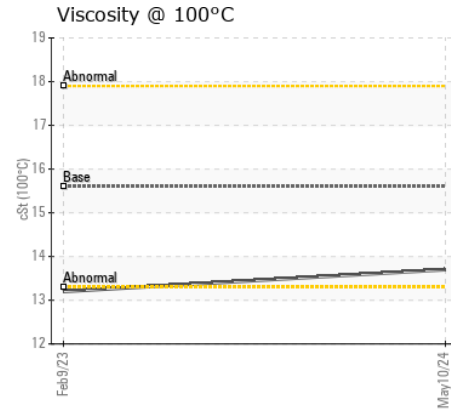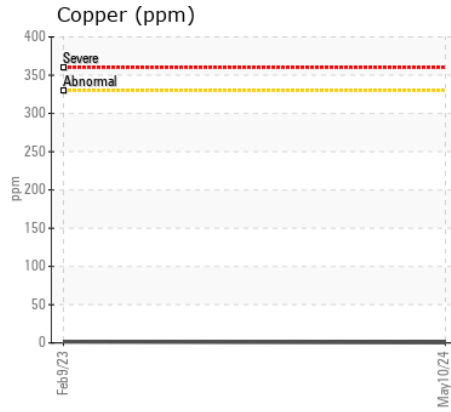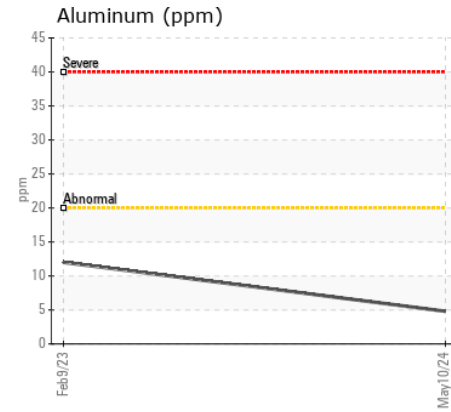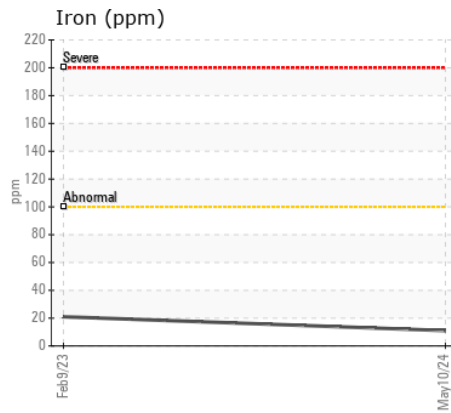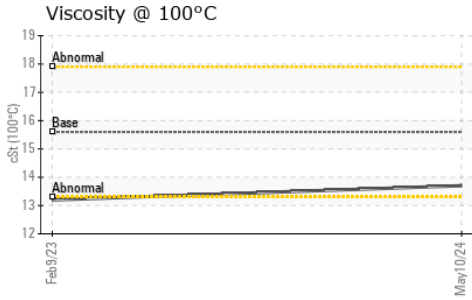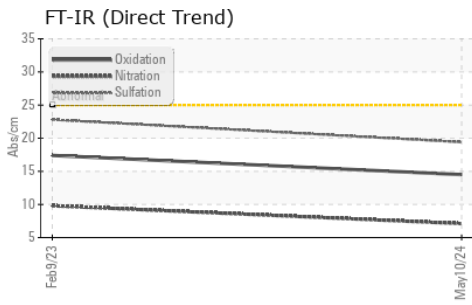

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0122270  
**Lab Number** : 02637371  
**Unique Number** : 5786533  
**Test Package** : MOB 1  
**Received** : 24 May 2024  
**Tested** : 24 May 2024  
**Diagnosed** : 24 May 2024 - Wes Davis

**GFL Environmental - 987 - Charlottetown**  
 7 Superior Crescent  
 Charlottetown, PE  
 CA C1A 7N5  
 Contact: Vicki Metcalfe  
 vmetcalfe@gflenv.com  
 T: (782)377-5918  
 F: (506)453-9490

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.