



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[86395]**

Machine Id

**1 ADELAIDE ST E TORONTO GWL GWL**

Component

**Right Diesel Engine**

Fluid

**ESSO XD-3 EXTRA 15W40 (100 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid. this testkit includes BN to determine the suitability of the oil for continued use.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PN0006188</b>	PN0004669	PN0003479
Sample Date		Client Info		<b>17 May 2024</b>	03 May 2023	10 May 2022
Machine Age	hrs	Client Info		<b>746</b>	743	724
Oil Age	hrs	Client Info		<b>4</b>	19	9
Filter Age	hrs	Client Info		<b>4</b>	19	9
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

Metal levels are typical for a new component breaking in. Component wear rates appear to be normal (unconfirmed).

Iron	ppm	ASTM D5185(m)	>200	<b>2</b>	3	3
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	4
Aluminum	ppm	ASTM D5185(m)	>30	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	2	2
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<b>6</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>3.0</b>	3.6	3.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>12.5</b>	13.4	15.1
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service (unconfirmed).

Sodium	ppm	ASTM D5185(m)	>192	<b>&lt;1</b>	<1	<1
Boron	ppm	ASTM D5185(m)		<b>2</b>	14	11
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>1</b>	11	11
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185(m)		<b>834</b>	96	40
Calcium	ppm	ASTM D5185(m)	3780	<b>1288</b>	3573	3064
Phosphorus	ppm	ASTM D5185(m)	1370	<b>1009</b>	761	664
Zinc	ppm	ASTM D5185(m)	1500	<b>1161</b>	764	705
Sulfur	ppm	ASTM D5185(m)	3800	<b>2551</b>	2457	2145
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>5.3</b>	5.1	5.1
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>14.0</b>	13.2	13.4

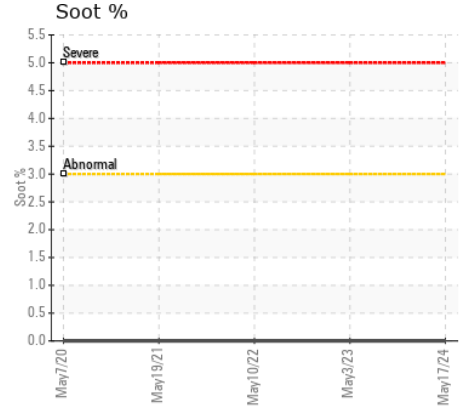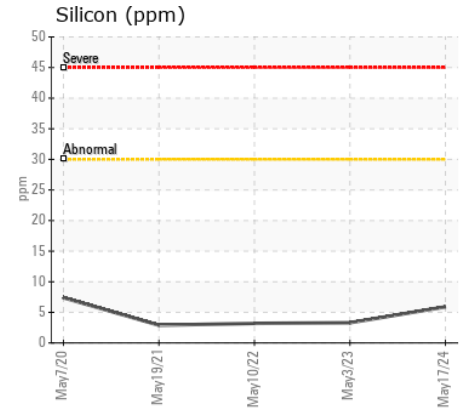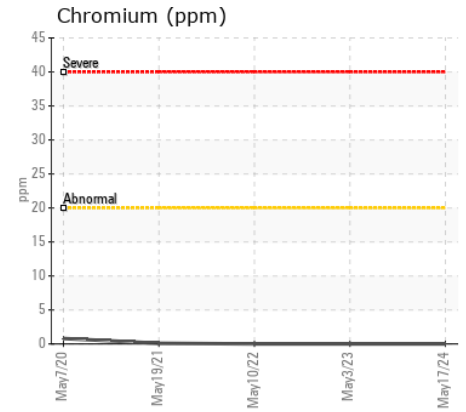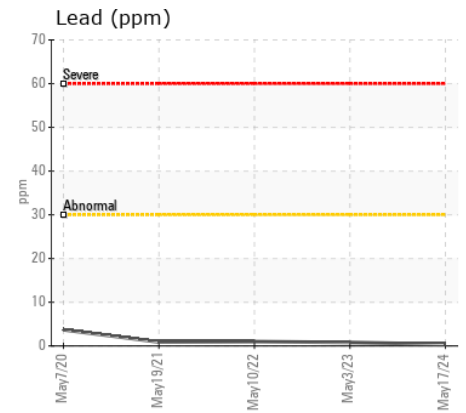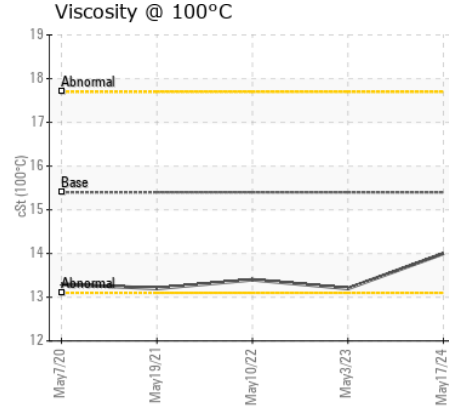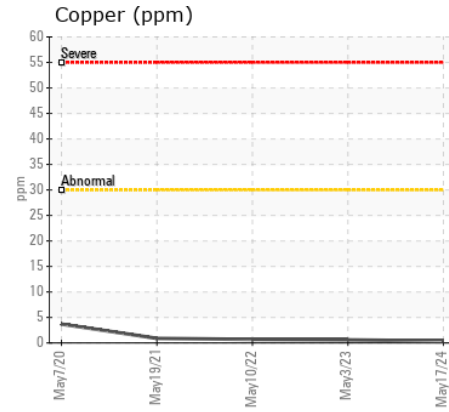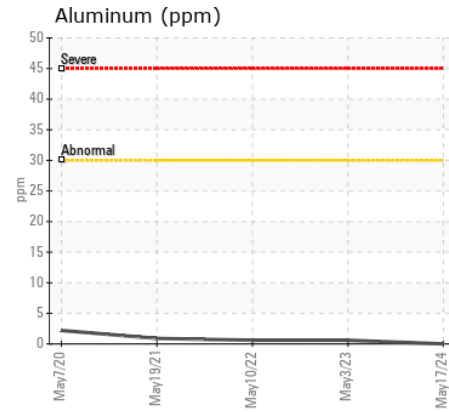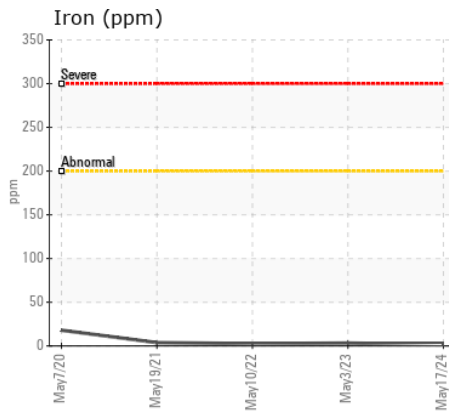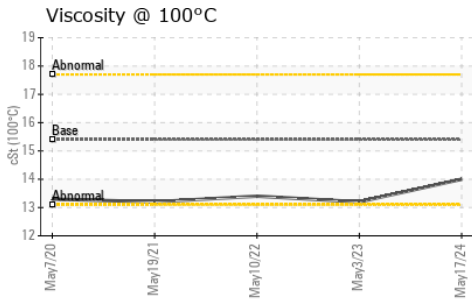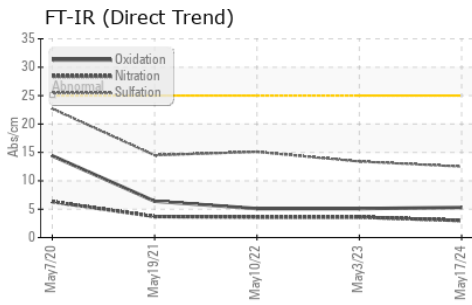

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PN0006188 **Received** : 24 May 2024  
**Lab Number** : 02637380 **Tested** : 24 May 2024  
**Unique Number** : 5786542 **Diagnosed** : 24 May 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**POWER STATION INC.**  
 1050 JAYSON COURT  
 MISSISSAUGA, ON  
 CA L4W 2V5  
 Contact: Brett Kinkley  
 Bkinkley@pwrstn.com  
 T:  
 F: (905)565-8544