



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

LAFARGE [404169]

Machine Id

VOLVO L260H 1366

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP450482	VCP380058	---
Sample Date		Client Info		19 May 2024	17 Dec 2023	---
Machine Age	hrs	Client Info		2092	1096	---
Oil Age	hrs	Client Info		2000	1000	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	15	25	---
Chromium	ppm	ASTM D5185(m)	>20	0	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>2	0	0	---
Aluminum	ppm	ASTM D5185(m)	>25	1	3	---
Lead	ppm	ASTM D5185(m)	>40	<1	6	---
Copper	ppm	ASTM D5185(m)	>330	46	200	---
Tin	ppm	ASTM D5185(m)	>15	<1	2	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION












Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	22	---
Potassium	ppm	ASTM D5185(m)	>20	<1	5	---
Fuel	%	ASTM D7593*	>6.0	1.5	1.7	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>3	0.2	0.3	---
Nitration	Abs/cm	ASTM D7624*	>20	9.9	10.1	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.4	22.6	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	4	---
Boron	ppm	ASTM D5185(m)	2.5	19	22	---
Barium	ppm	ASTM D5185(m)	0.0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	0.7	44	75	---
Manganese	ppm	ASTM D5185(m)	0.0	<1	2	---
Magnesium	ppm	ASTM D5185(m)	256	447	111	---
Calcium	ppm	ASTM D5185(m)	2057	1747	2015	---
Phosphorus	ppm	ASTM D5185(m)	935	818	909	---
Zinc	ppm	ASTM D5185(m)	1223	1038	1075	---
Sulfur	ppm	ASTM D5185(m)	4079	2170	2866	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	21.2	16.6	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	12.3	▲ 10.6	---

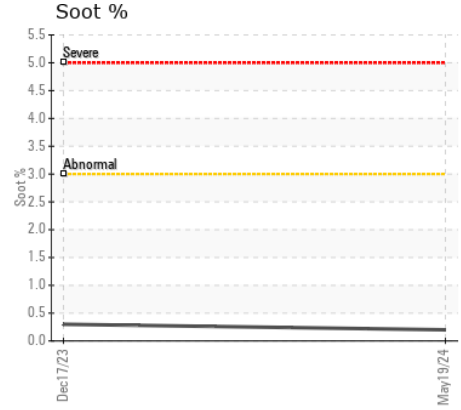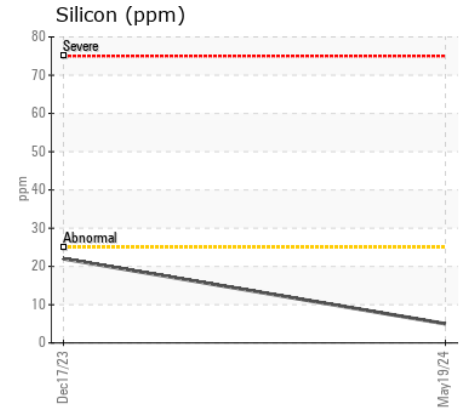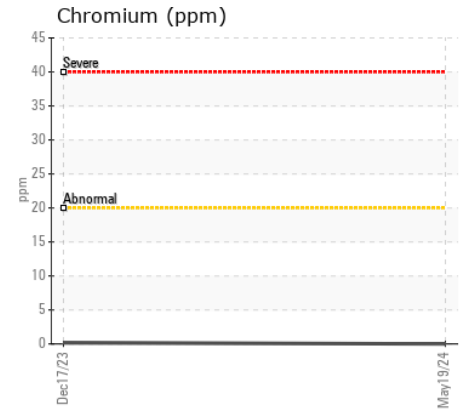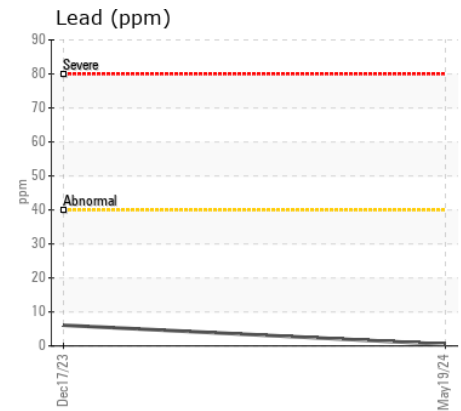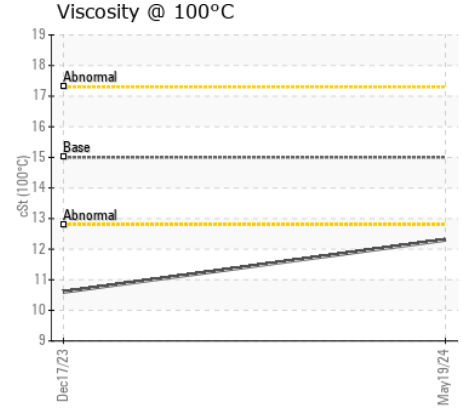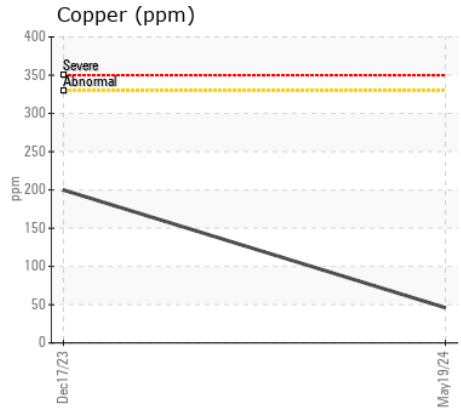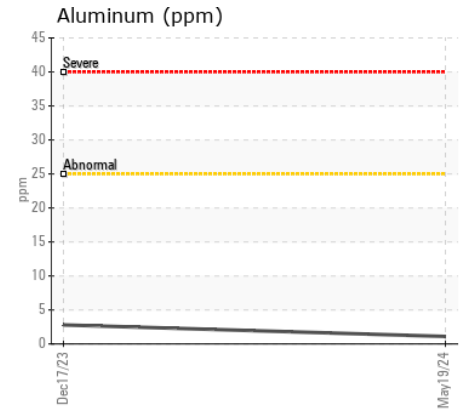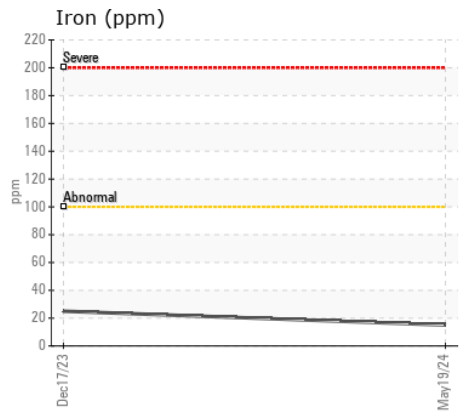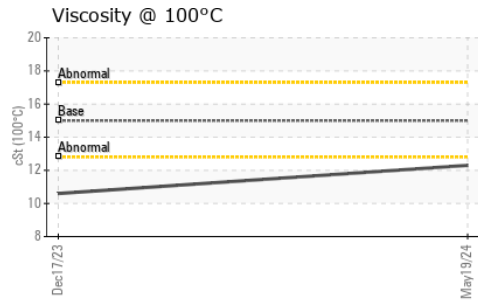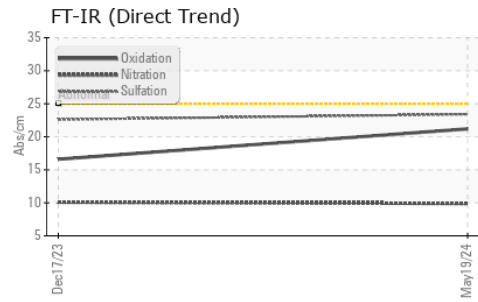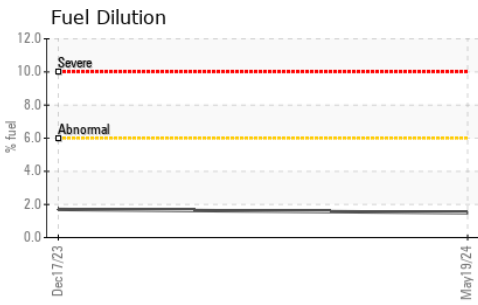

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP450482 **Received** : 24 May 2024
Lab Number : 02637393 **Tested** : 27 May 2024
Unique Number : 5786555 **Diagnosed** : 27 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

STRONGCO EQUIPMENT INC.
 1640 ENTERPRISE ROAD
 MISSISSAUGA, ON
 CA L4W 4L4
 Contact: Jamal Harvey
 jharvey@strongco.com
 T:
 F: (905)670-2338

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.