



Machine Id
15203
Component
Front Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (20 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0083052	---	---
Sample Date		Client Info		02 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	73	---	---
Chromium	ppm	ASTM D5185(m)	>20	2	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	7	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	6	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>4	1.6	---	---
Nitration	Abs/cm	ASTM D7624*	>20	11.8	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.4	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	---	---
Boron	ppm	ASTM D5185(m)	2	3	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	50	59	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	950	970	---	---
Calcium	ppm	ASTM D5185(m)	1050	1073	---	---
Phosphorus	ppm	ASTM D5185(m)	995	968	---	---
Zinc	ppm	ASTM D5185(m)	1180	1181	---	---
Sulfur	ppm	ASTM D5185(m)	2600	2353	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.8	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	75.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	144	145	---	---

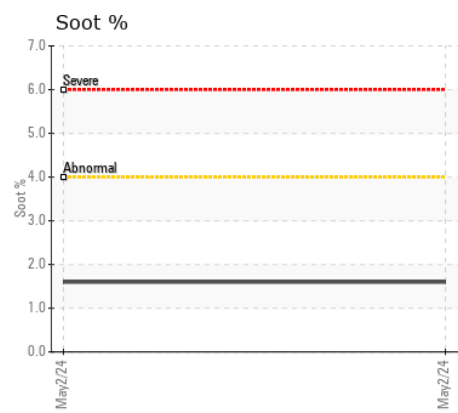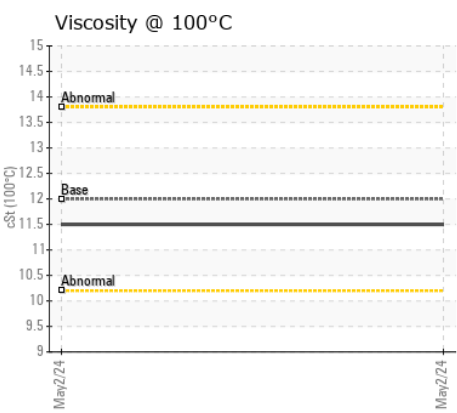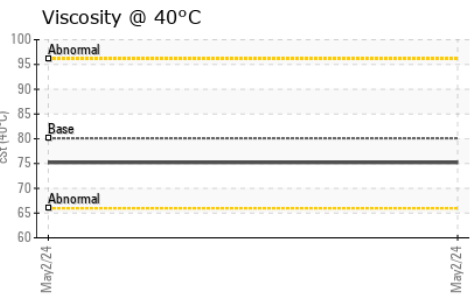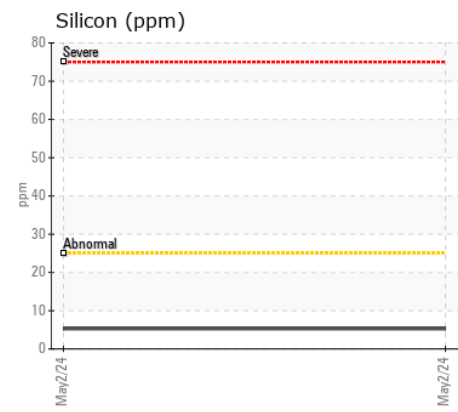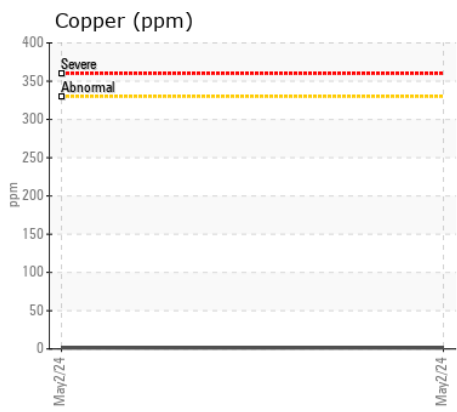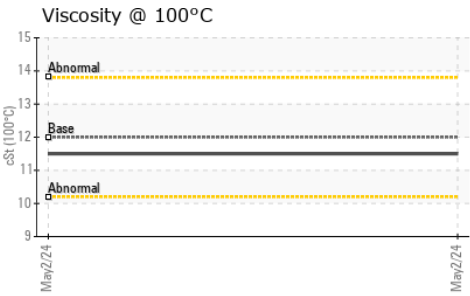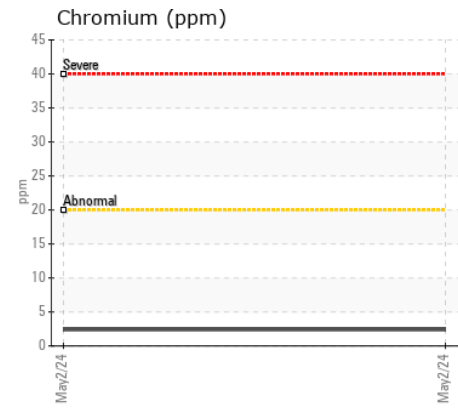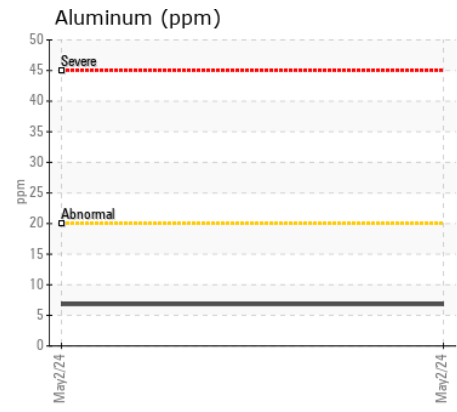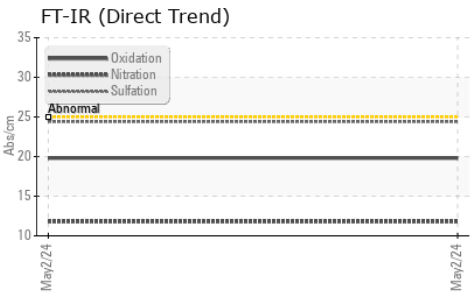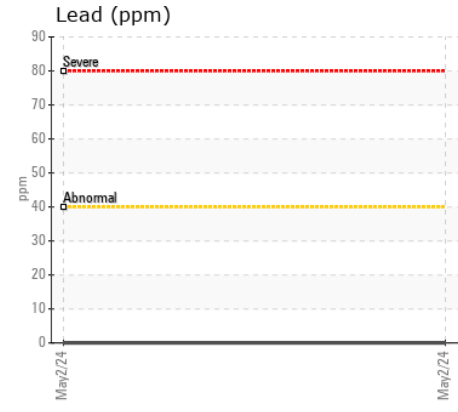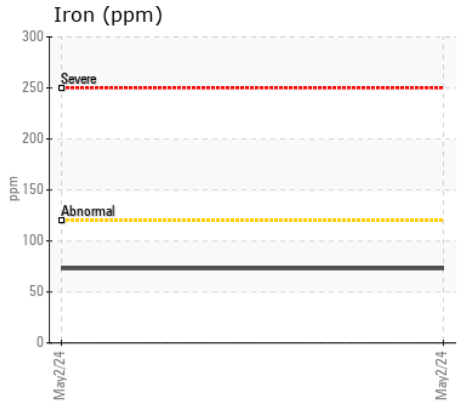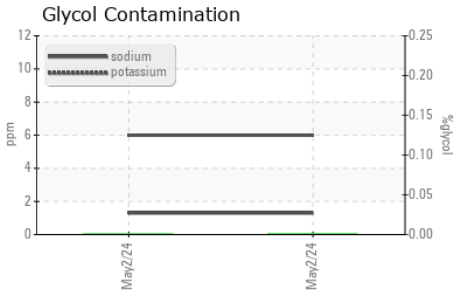

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0083052 **Received** : 24 May 2024
Lab Number : **02637424** **Tested** : 24 May 2024
Unique Number : 5786586 **Diagnosed** : 24 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol, KV40, VI, Visual)

Wasteco
 161 Bridgeland Ave.
 Toronto, ON
 CA M6A 1Z1
 Contact: Steve Andrade
 sandrade@wasteco.com
 T: (416)787-5000
 F: (416)787-6210

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.