



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**LAKESHORE T4**  
 Component  
**Power Take Off**  
 Fluid  
**GEAR OIL SAE 80W90 (--- LTR)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0933488	---	---
Sample Date		Client Info		22 May 2024	---	---
Machine Age	hrs	Client Info		228	---	---
Oil Age	hrs	Client Info		11	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	9	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)		0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	0	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>200	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>170	0	---	---
Boron	ppm	ASTM D5185(m)	400	33	---	---
Barium	ppm	ASTM D5185(m)	200	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	12	0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	12	<1	---	---
Calcium	ppm	ASTM D5185(m)	150	12	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	389	---	---
Zinc	ppm	ASTM D5185(m)	125	9	---	---
Sulfur	ppm	ASTM D5185(m)	22500	20847	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	2.00	1.09	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	128	---	---

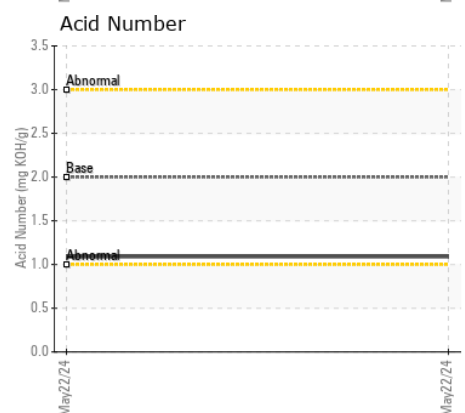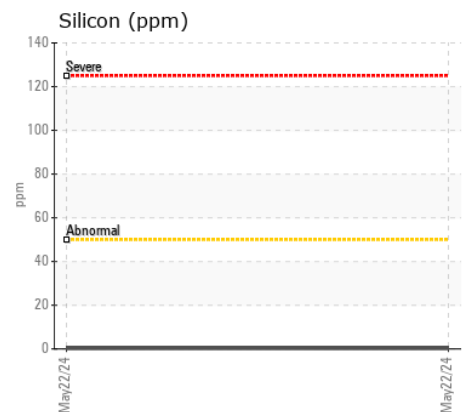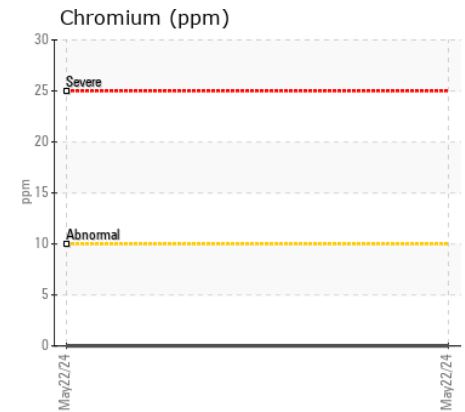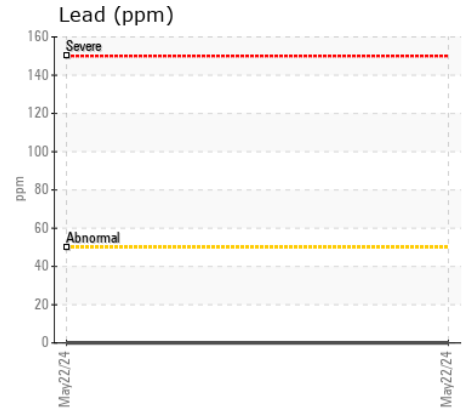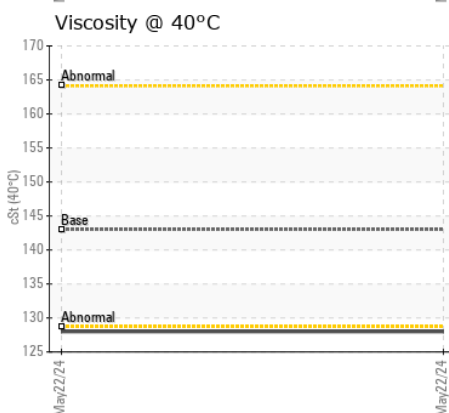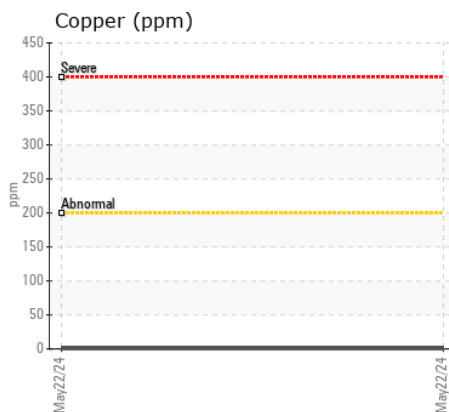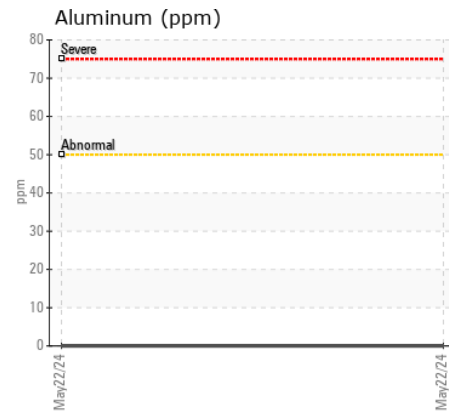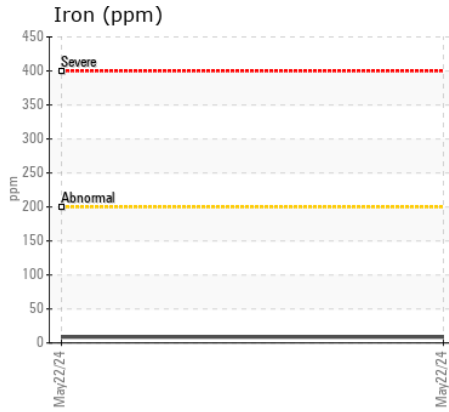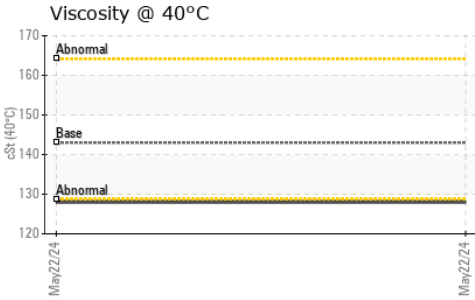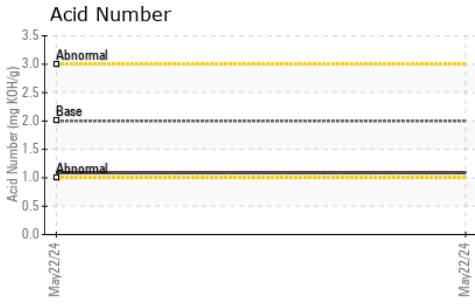

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0933488 **Received** : 24 May 2024  
**Lab Number** : 02637523 **Tested** : 24 May 2024  
**Unique Number** : 5786685 **Diagnosed** : 24 May 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: TAN Man )

**Windsor Spring & Alignment Ltd.**  
 1016 Crawford Ave.  
 Windsor, ON  
 CA N9A 5C9  
 Contact: Al Lemay  
 windsorspring@hotmail.com  
 T: (519)971-8895  
 F: (519)971-8932

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.