



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Steering Gear Compartment
 Machine Id
G5-26136 Starboard Telemotor
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX AW 22 (25 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0855465	WC62006746	WC62005685
Sample Date		Client Info		21 May 2024	18 Jan 2017	17 Jul 2014
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Filter Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	3	2	9
Chromium	ppm	ASTM D5185(m)	>10	0	0	<1
Nickel	ppm	ASTM D5185(m)	>10	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>10	0	<1	<1
Lead	ppm	ASTM D5185(m)	>20	<1	1	2
Copper	ppm	ASTM D5185(m)	>20	3	<1	3
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>15	0	<1	1
Potassium	ppm	ASTM D5185(m)	>20	0	0	0
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	1601	5290	3422
Particles >6µm		ASTM D7647	>1300	180	1287	439
Particles >14µm		ASTM D7647	>160	4	106	7
Particles >21µm		ASTM D7647	>40	2	23	0
Particles >38µm		ASTM D7647	>10	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/15/9	20/17/14	19/16/10
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		0	1	<1
Boron	ppm	ASTM D5185(m)	0	<1	0	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	1	0	0	<1
Magnesium	ppm	ASTM D5185(m)	0	<1	0	<1
Calcium	ppm	ASTM D5185(m)	50	60	147	134
Phosphorus	ppm	ASTM D5185(m)	330	323	245	254
Zinc	ppm	ASTM D5185(m)	430	405	328	332
Sulfur	ppm	ASTM D5185(m)	760	1036	592	728
Acid Number (AN)	mg KOH/g	ASTM D974*	0.70	0.46	0.43	0.380
Visc @ 40°C	cSt	ASTM D7279(m)	22.0	22.4	21.8	22.0

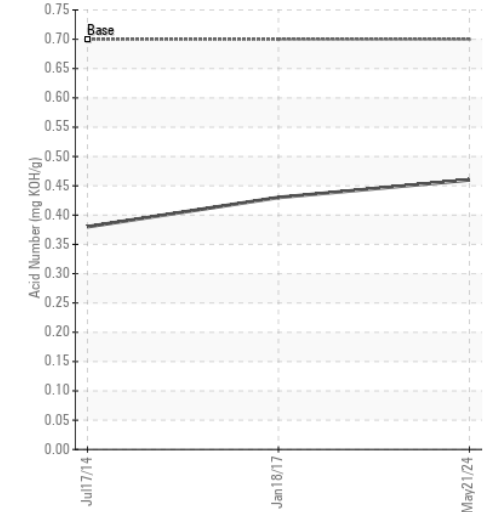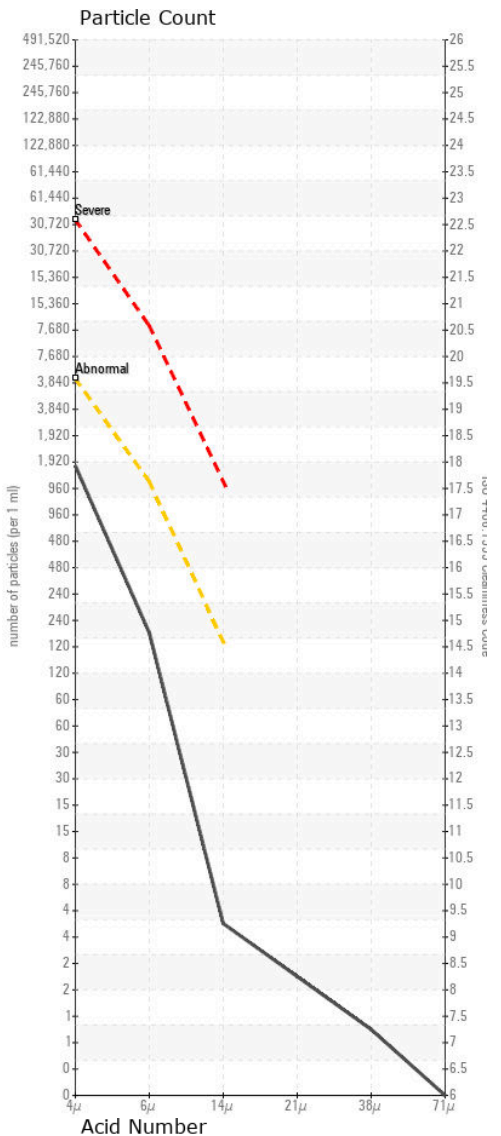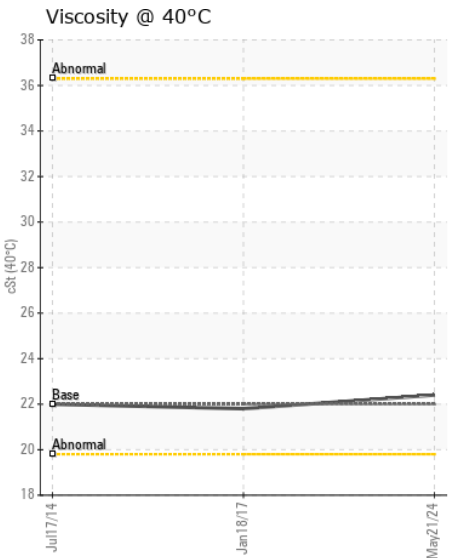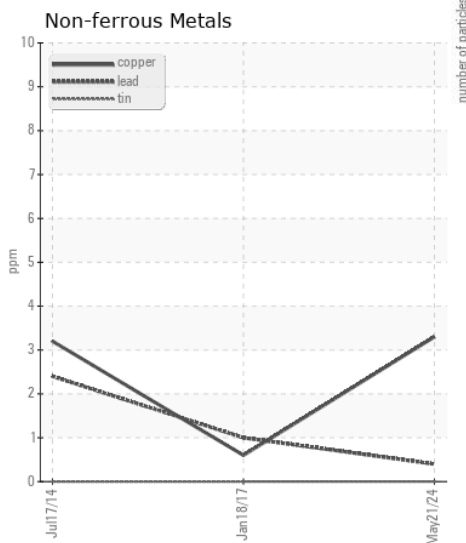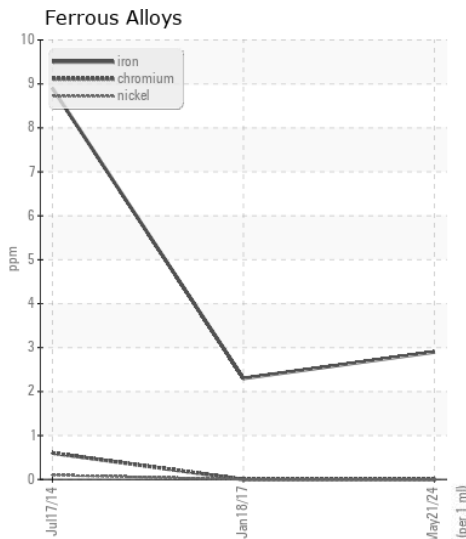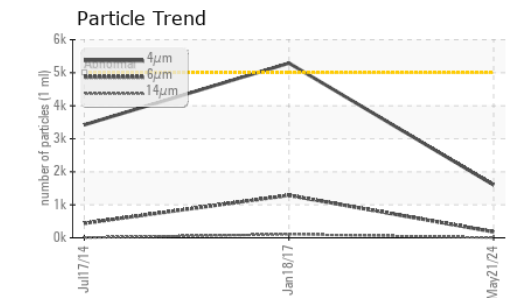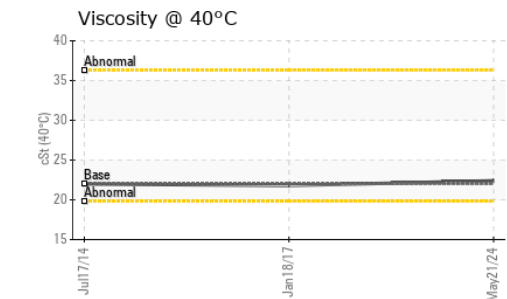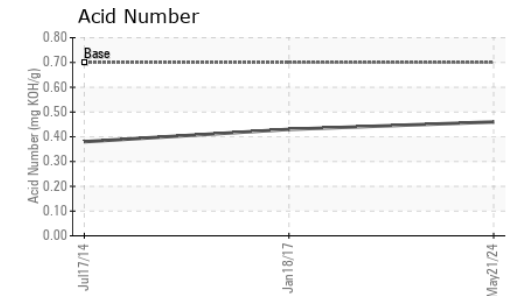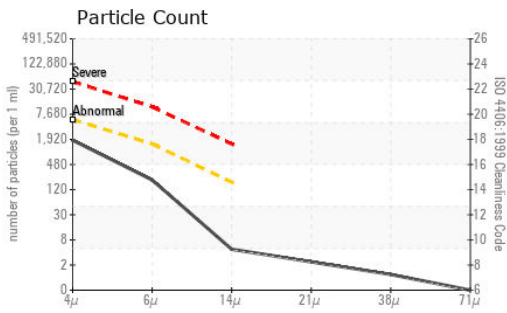

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0855465 **Received** : 24 May 2024
Lab Number : 02637537 **Tested** : 28 May 2024
Unique Number : 5786699 **Diagnosed** : 28 May 2024 - Wes Davis
Test Package : MAR 2 (Additional Tests: TAN Man)

CANADIAN COAST GUARD
 CCGS GRIFFON, PO BOX 1000, 401 KING ST.W
 Prescott, ON
 CA K6V 5T3
 Contact: Laurie Bosley
 Laurie.Bosley@dfo-mpo.gc.ca
 T:
 F: (519)383-1994

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.