



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

**LAFARGE [404169]**

Machine Id

**VOLVO L260H 1366**

Component

**Front Axle**

Fluid

**TRANSAXLE OIL SAE 75W80 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TRANSAXLE OIL SAE 75W80. Please confirm.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP450489	---	---
Sample Date		Client Info		19 May 2024	---	---
Machine Age	hrs	Client Info		2092	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>500	198	---	---
Chromium	ppm	ASTM D5185(m)	>10	4	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	1	---	---
Lead	ppm	ASTM D5185(m)	>25	0	---	---
Copper	ppm	ASTM D5185(m)	>50	2	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>75	11	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	160	108	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	25	1	---	---
Manganese	ppm	ASTM D5185(m)		5	---	---
Magnesium	ppm	ASTM D5185(m)	12	10	---	---
Calcium	ppm	ASTM D5185(m)	3750	3821	---	---
Phosphorus	ppm	ASTM D5185(m)	1200	1261	---	---
Zinc	ppm	ASTM D5185(m)	1500	1536	---	---
Sulfur	ppm	ASTM D5185(m)	6000	3250	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	48	41.5	---	---

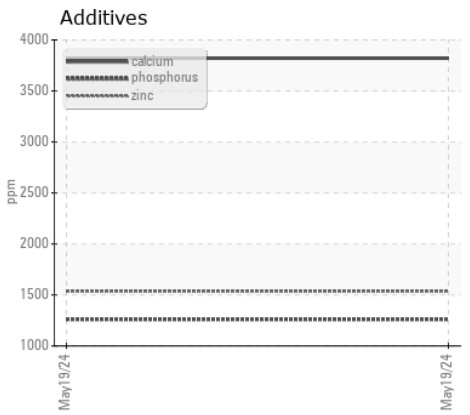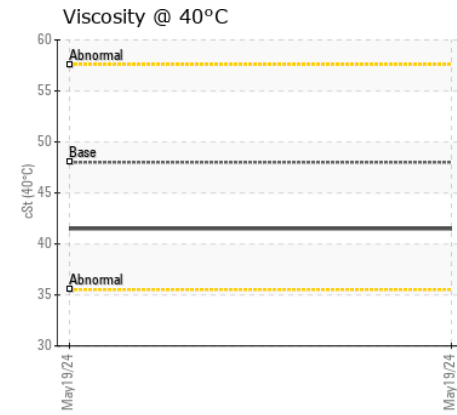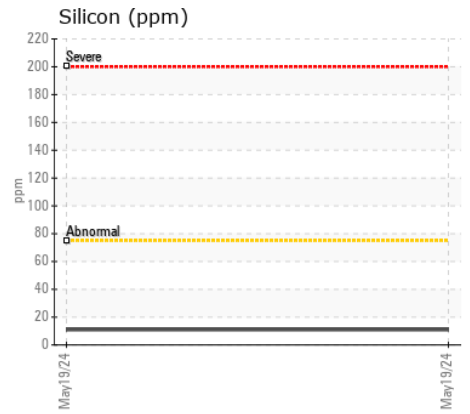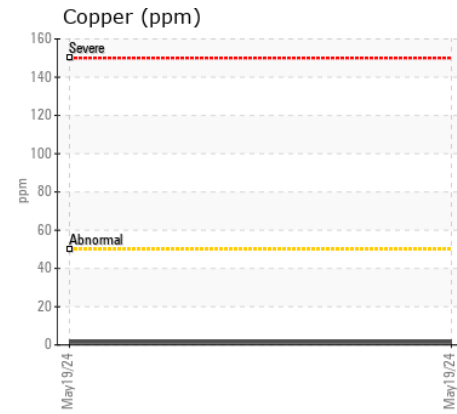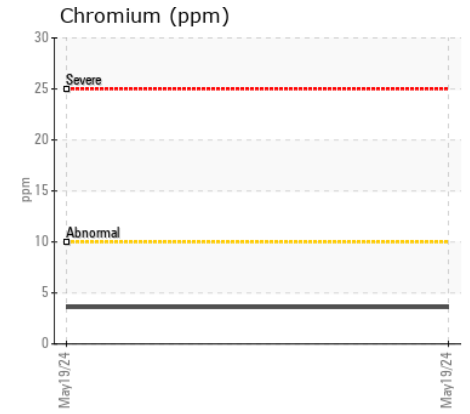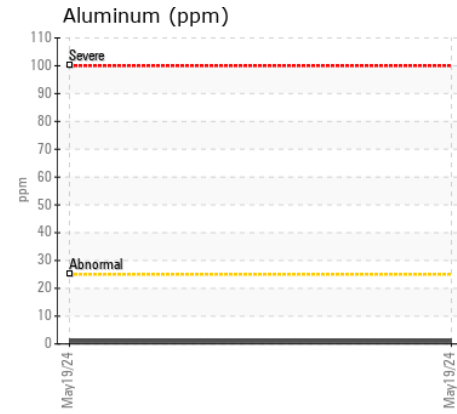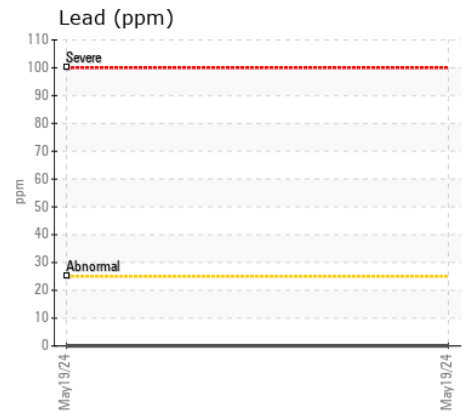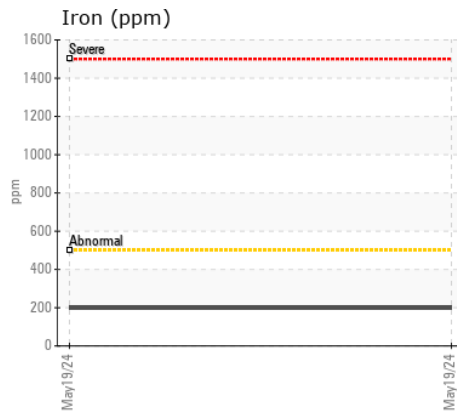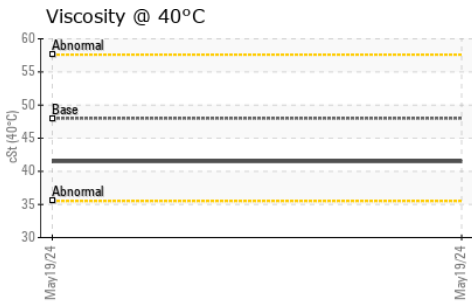

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP450489 **Received** : 24 May 2024  
**Lab Number** : 02637540 **Tested** : 24 May 2024  
**Unique Number** : 5786702 **Diagnosed** : 24 May 2024 - Wes Davis  
**Test Package** : MOB 1

**STRONGCO EQUIPMENT INC.**  
 1640 ENTERPRISE ROAD  
 MISSISSAUGA, ON  
 CA L4W 4L4  
 Contact: Jamal Harvey  
 jharvey@strongco.com  
 T:  
 F: (905)670-2338

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.