

**OIL ANALYSIS REPORT** 

WEAR CONTAMINATION FLUID CONDITION

NORMAL NORMAL

Area


(BWQ) SKYCARE [53297]

[BWQ] FAIRCHILD SA226 P-54188 (S/N TC-379)

Right Jet Turbine

EASTMAN TURBO OIL 2380 (--- GAL)

| RECOMMENDATION                                       | Test             | UOM      | Method        | Limit/Abn | Current     | History1    | History2    |
|--|------------------|----------|---------------|-----------|-------------|-------------|-------------|
| This is a baseline read-out on the submitted sample. | Sample Number    |          | Client Info   |           | GT57537     | GT57709     | GT57696     |
|  | Sample Date      |          | Client Info   |           | 21 May 2024 | 22 Apr 2024 | 04 Apr 2024 |
|  | Machine Age      | hrs      | Client Info   |           | 0           | 0           | 0           |
|  | Oil Age          | hrs      | Client Info   |           | 325         | 646         | 585         |
|  | Filter Age       | hrs      | Client Info   |           | 95          | 61          | 68          |
|  | Oil Changed      |          | Client Info   |           | N/A         | N/A         | N/A         |
|  | Filter Changed   |          | Client Info   |           | N/A         | N/A         | N/A         |
|  | Sample Status    |          |               |           | NORMAL      | NORMAL      |             |
| WEAR   | Iron             | ppm      | ASTM D5185(m) | >8        | <1          | 0           | 0           |
|  | Chromium         | ppm      | ASTM D5185(m) | >2        | 0           | 0           | 0           |
|  | Nickel           | ppm      | ASTM D5185(m) | >2        | 0           | 0           | 0           |
|  | Silver           | ppm      | ASTM D5185(m) | >2        | 0           | 0           | 0           |
|  | Aluminum         | ppm      | ASTM D5185(m) | >2        | <1          | <1          | <1          |
|  | Lead             | ppm      | ASTM D5185(m) | >3        | <1          | <1          | <1          |
|  | Copper           | ppm      | ASTM D5185(m) | >3        | 0           | <1          | 0           |
| CONTAMINATION  | Water            |          | WC Method     | >0.1      | NEG         | NEG         | NEG         |
| FLUID CONDITION                                      | Magnesium        | ppm      | ASTM D5185(m) | 0         | 0           | 0           | 0           |
|  | Acid Number (AN) | mg KOH/g | ASTM D974*    | 0.43      | 0.55        | 0.43        | 0.43        |
|  | Visc @ 40°C      | cSt      | ASTM D7279(m) | 24.2      | 24.5        | 24.8        |             |

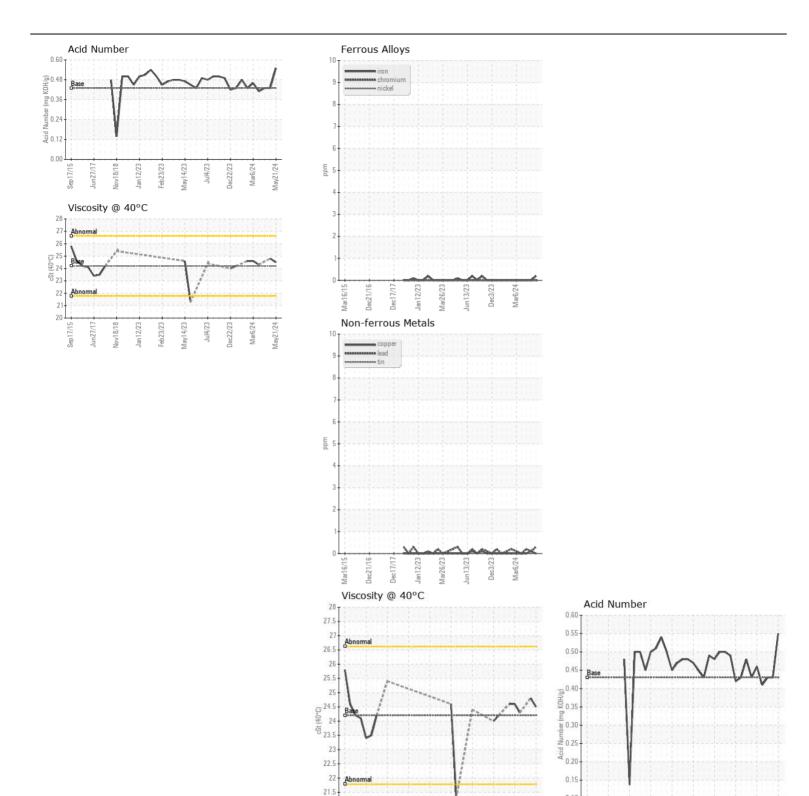





Laboratory Sample No.

: GT57537 Lab Number : 02637583

Unique Number : 5786745

21

Sep17/15

20.5 20

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received **Tested** 

Diagnosed

: 24 May 2024 : 24 May 2024 : 24 May 2024 - Wes Davis

0.10

0.05

0.00

111 S. 34th Street, 301 Receiving, Attn: SOAP Program

PHOENIX, AZ US 85034 Contact: GARRETT

**Honeywell Engines** 

Test Package : G331 ( Additional Tests: ICP ) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

T: F: (602)365-2676