



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1502
 Component
Rear Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0938921	WC0925700	WC0905421
Sample Date		Client Info		21 May 2024	04 Apr 2024	20 Feb 2024
Machine Age	hrs	Client Info		32298	31777	31257
Oil Age	hrs	Client Info		521	0	460
Filter Age	hrs	Client Info		521	0	460
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	27	27	32
Chromium	ppm	ASTM D5185(m)	>20	1	1	2
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	3	3
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	2	1	2
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	4	8
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	1	1.1	0.8
Nitration	Abs/cm	ASTM D7624*	>20	10.2	10.2	8.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.8	22.6	21.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	2	2	3
Boron	ppm	ASTM D5185(m)	250	2	2	1
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	59	57	57
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	964	940	926
Calcium	ppm	ASTM D5185(m)	3000	1038	1018	1008
Phosphorus	ppm	ASTM D5185(m)	1150	988	964	975
Zinc	ppm	ASTM D5185(m)	1350	1192	1158	1133
Sulfur	ppm	ASTM D5185(m)	4250	2471	2402	2621
Oxidation	Abs/.1mm	ASTM D7414*	>25	25.6	19.4	17.9
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.0	14.3	14.1

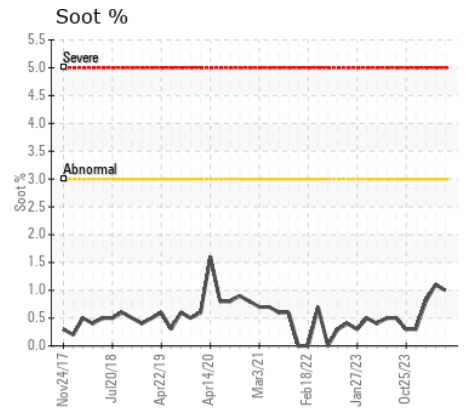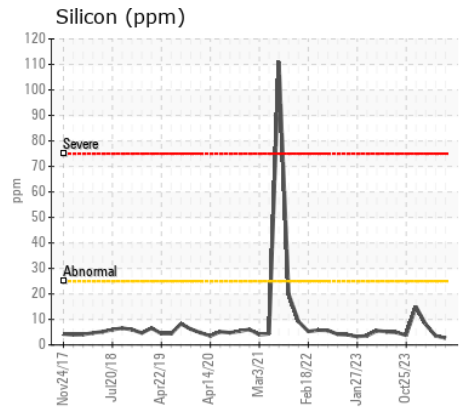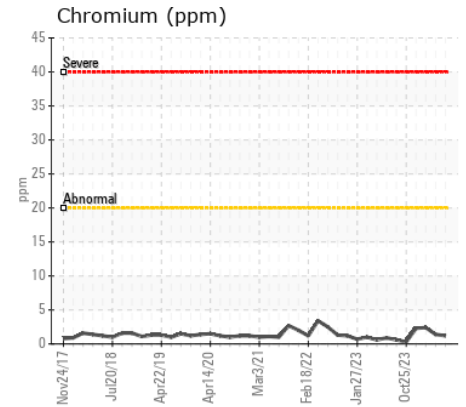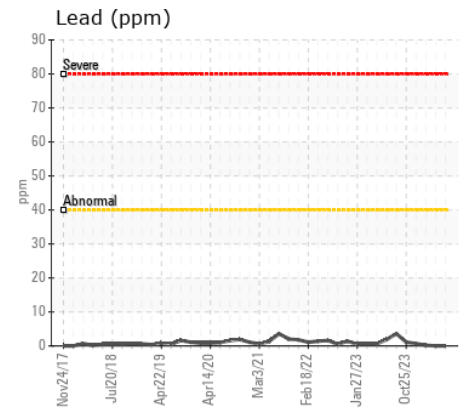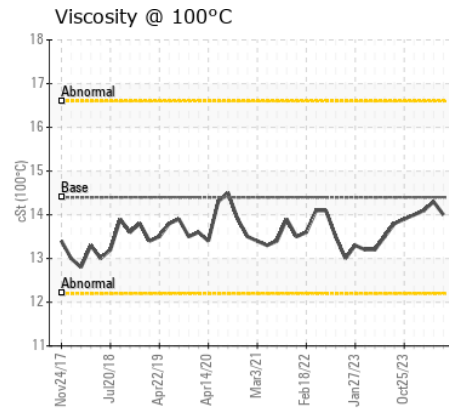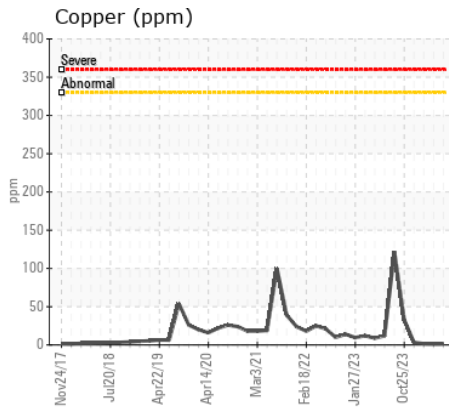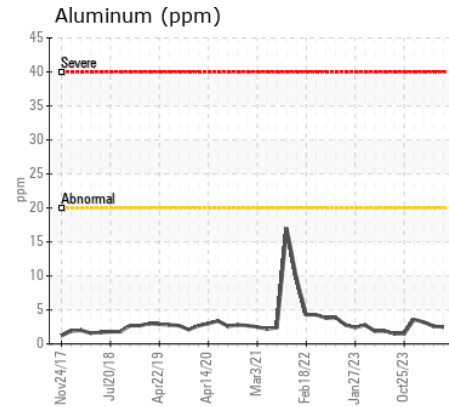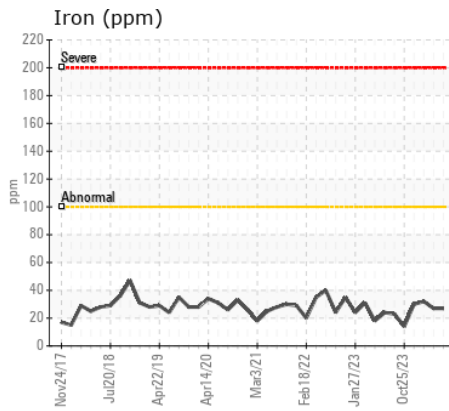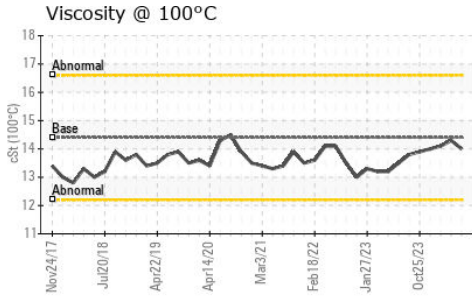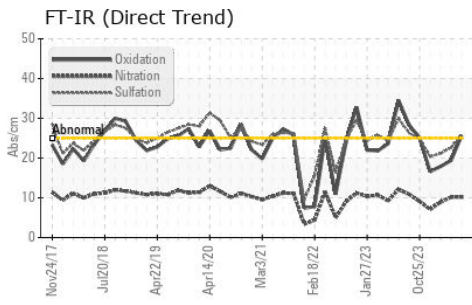

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0938921
Lab Number : 02637634
Unique Number : 5786796
Test Package : MOB 1
Received : 27 May 2024
Tested : 27 May 2024
Diagnosed : 27 May 2024 - Kevin Marson

KINGSTON TRANSIT
 1181 JOHN COUNTER BLVD
 KINGSTON, ON
 CA K7K 6C7
 Contact: Brent Gunter
 bgunter@cityofkingston.ca
 T: (613)546-4291
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.