



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**424008**  
 Component  
**2 Axle**  
 Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.

**WEAR**

All component wear rates are normal.











**CONTAMINATION**

There is no indication of any contamination in the oil.

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0113153</b>	---	---
Sample Date		Client Info		<b>16 May 2024</b>	---	---
Machine Age	kms	Client Info		<b>621481</b>	---	---
Oil Age	kms	Client Info		<b>0</b>	---	---
Filter Age	kms	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---
<hr/>						
Iron	ppm	ASTM D5185(m)	>500	<b>260</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>7</b>	---	---
Lead	ppm	ASTM D5185(m)	>25	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m)	>50	<b>119</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
<hr/>						
Silicon	ppm	ASTM D5185(m)	>75	<b>19</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
<hr/>						
Sodium	ppm	ASTM D5185(m)		<b>3</b>	---	---
Boron	ppm	ASTM D5185(m)	400	<b>168</b>	---	---
Barium	ppm	ASTM D5185(m)	200	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	12	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>4</b>	---	---
Magnesium	ppm	ASTM D5185(m)	12	<b>7</b>	---	---
Calcium	ppm	ASTM D5185(m)	150	<b>25</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	<b>1314</b>	---	---
Zinc	ppm	ASTM D5185(m)	125	<b>75</b>	---	---
Sulfur	ppm	ASTM D5185(m)	22500	<b>20829</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	109	<b>107</b>	---	---

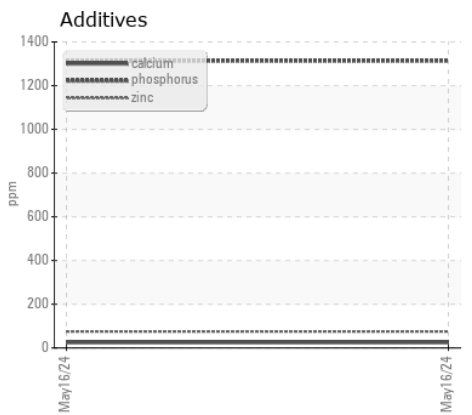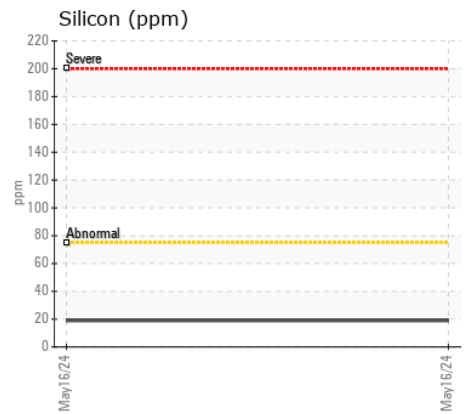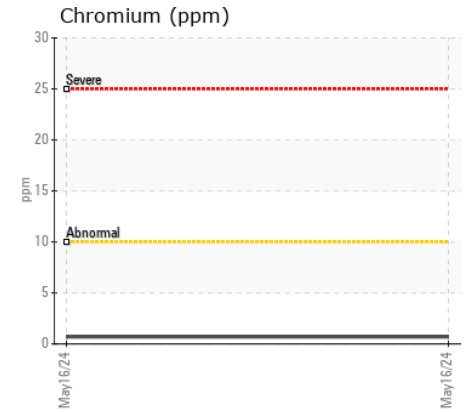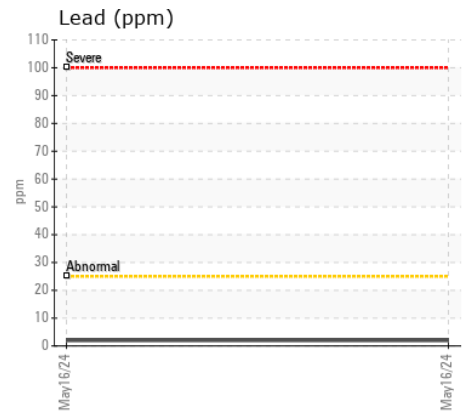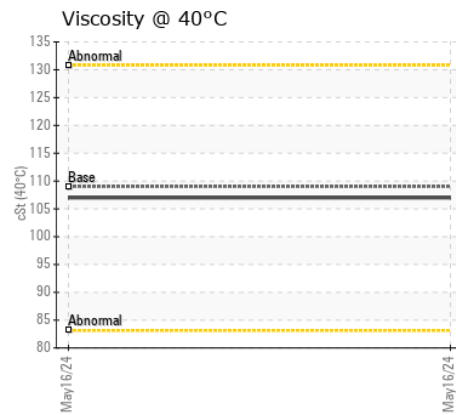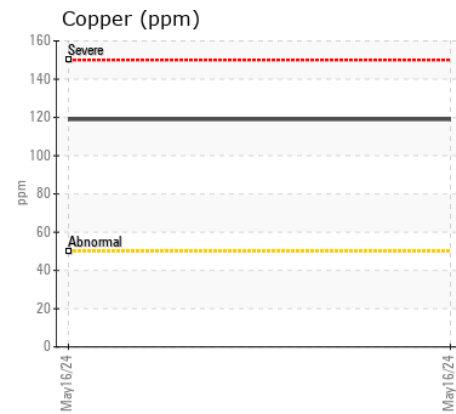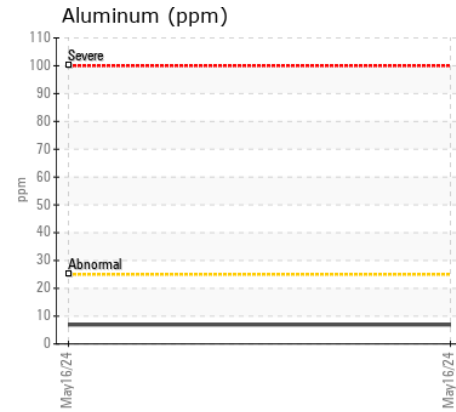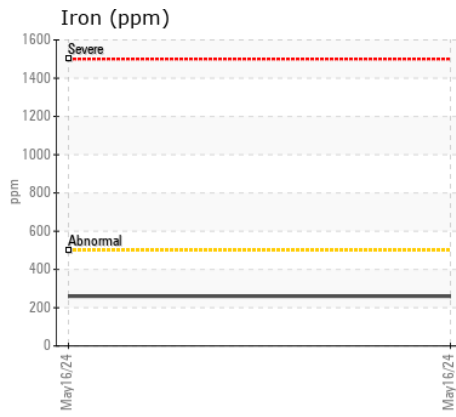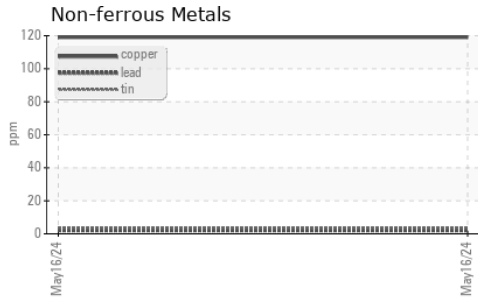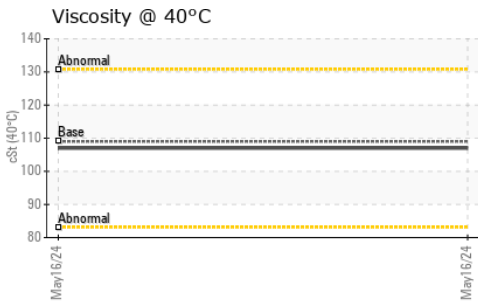

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113153  
**Lab Number** : 02637743  
**Unique Number** : 5786905  
**Test Package** : MOB 1

**GFL Environmental - 582 - Nanaimo**  
 3469 Aqua Terra Rd.,  
 Cassidy, BC  
 CA V0R 1H0  
 Contact: GFL Tech  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: