



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
510010
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (40 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0100841	GFL0100860	GFL0100865
Sample Date		Client Info		18 Apr 2024	12 Feb 2024	21 Nov 2023
Machine Age	kms	Client Info		0	347760	325934
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	8	7	7
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	2	2
Lead	ppm	ASTM D5185(m)	>40	<1	1	1
Copper	ppm	ASTM D5185(m)	>330	6	4	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	4	4
Potassium	ppm	ASTM D5185(m)	>20	2	2	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.2	0.1	0.2
Nitration	Abs/cm	ASTM D7624*	>20	9.6	7.9	8.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	18.9	19.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	1	2
Boron	ppm	ASTM D5185(m)	2	<1	1	6
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	50	59	60	56
Manganese	ppm	ASTM D5185(m)	0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	950	982	985	905
Calcium	ppm	ASTM D5185(m)	1050	1079	1072	991
Phosphorus	ppm	ASTM D5185(m)	995	1008	1037	933
Zinc	ppm	ASTM D5185(m)	1180	1233	1204	1120
Sulfur	ppm	ASTM D5185(m)	2600	2465	2735	2419
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.4	15.5	15.8
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.6	11.5	12.0

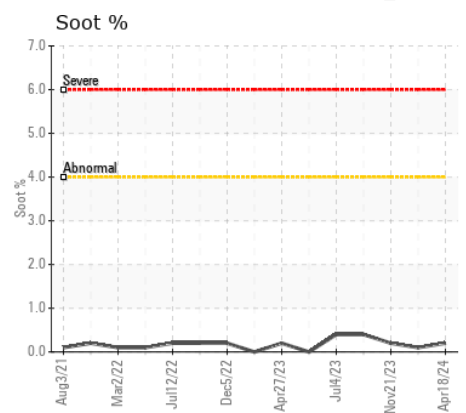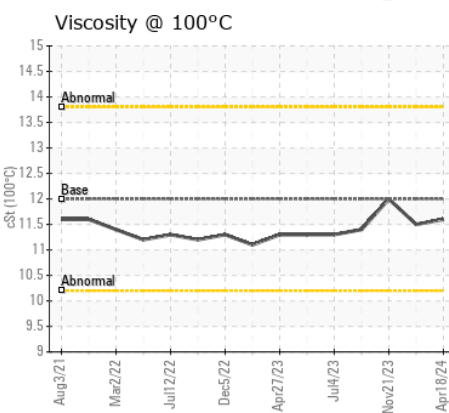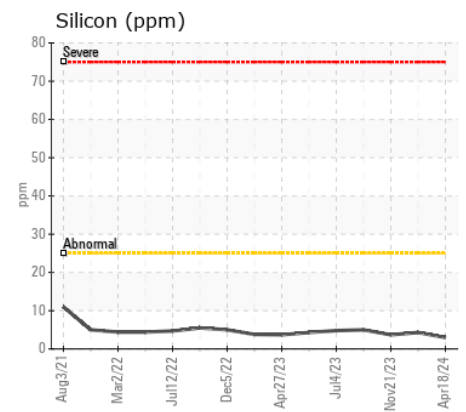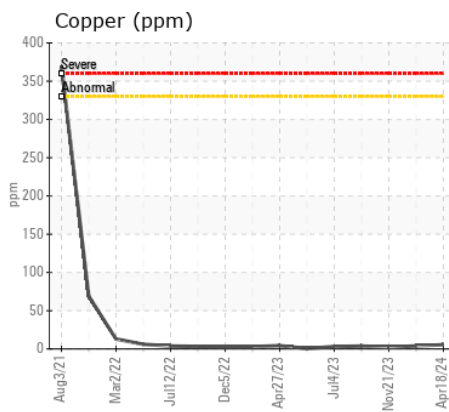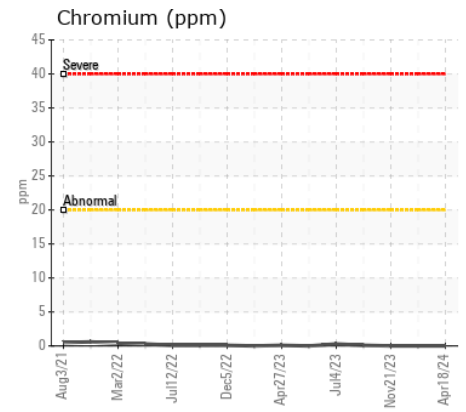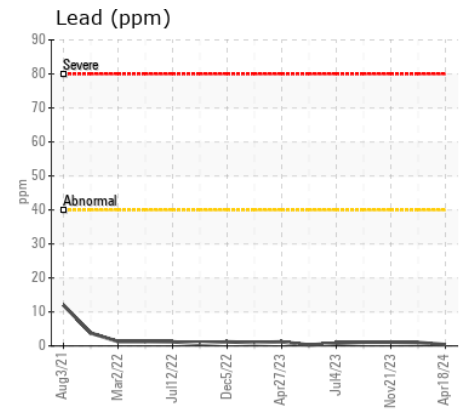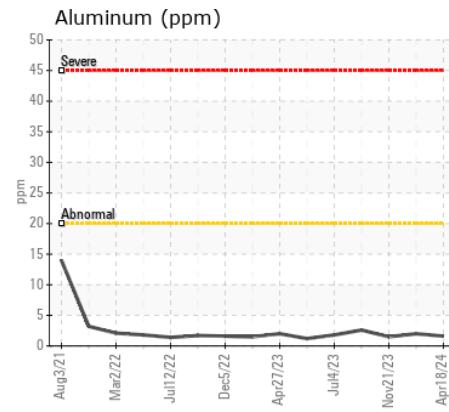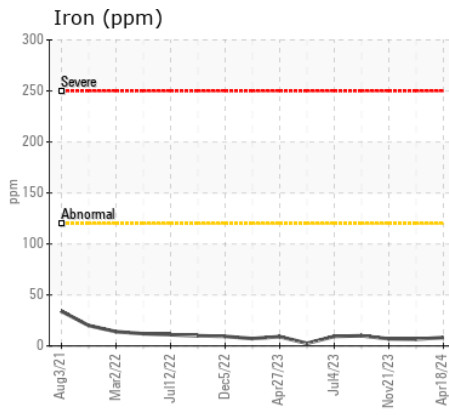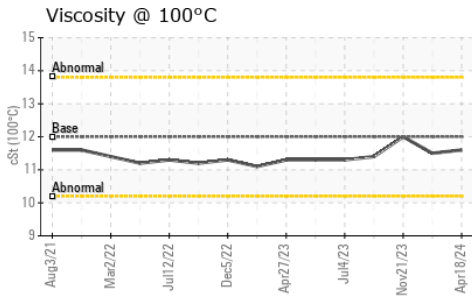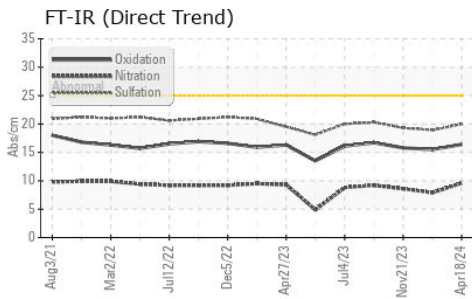

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0100841
Lab Number : 02637870
Unique Number : 5787032
Test Package : MOB 1
Received : 28 May 2024
Tested : 28 May 2024
Diagnosed : 28 May 2024 - Wes Davis

GFL Environmental - 520 - Winterburn
 20204 - 113 Avenue,
 Edmonton, AB
 CA T5S 0G3
 Contact: Jaekyung Ko
 jko@gflenv.com
 T: (780)444-8805
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.