



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**OR722**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0100572</b>	---	---
Sample Date		Client Info		<b>21 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>9574</b>	---	---
Oil Age	hrs	Client Info		<b>729</b>	---	---
Filter Age	hrs	Client Info		<b>729</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>15</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>5</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0.4</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.4</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.2</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>30</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>49</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>794</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1483</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>1054</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1284</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2636</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.3</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		<b>14.1</b>	---	---

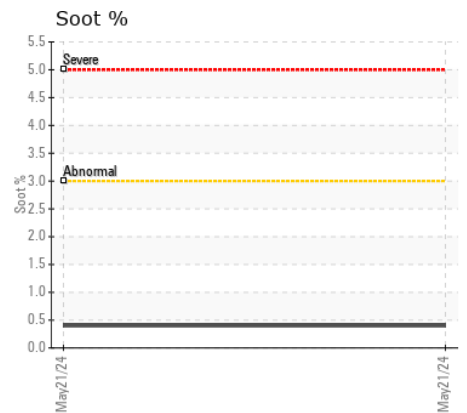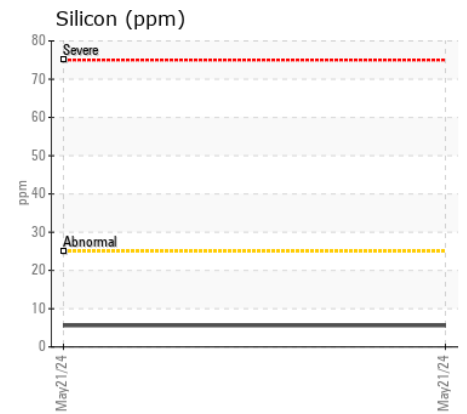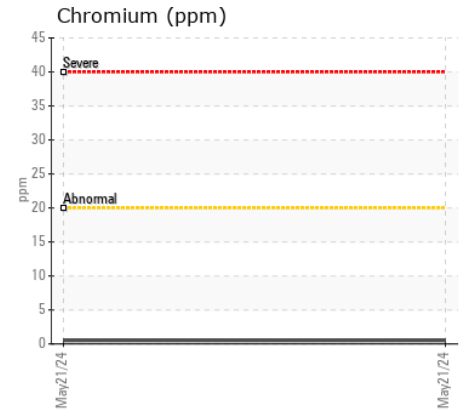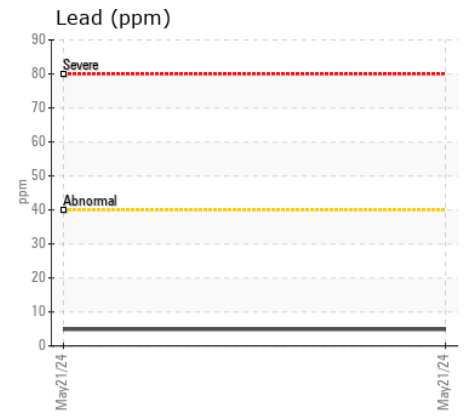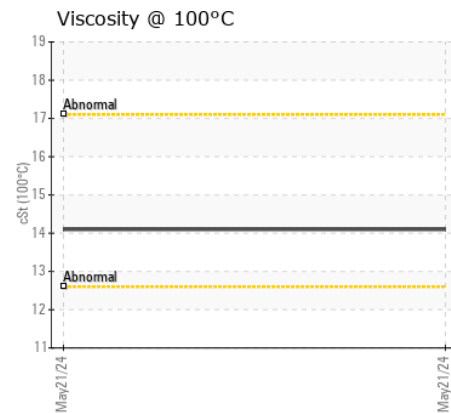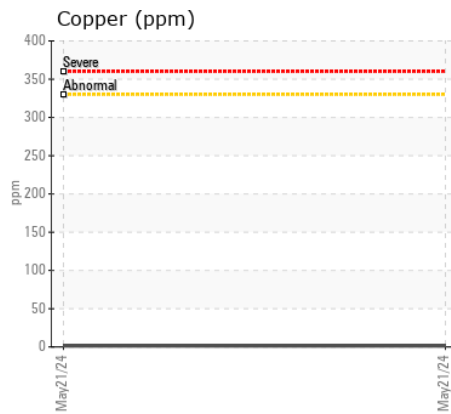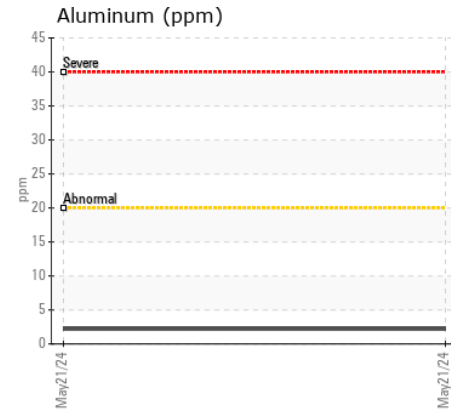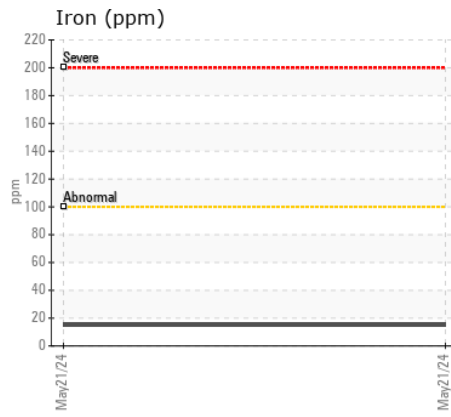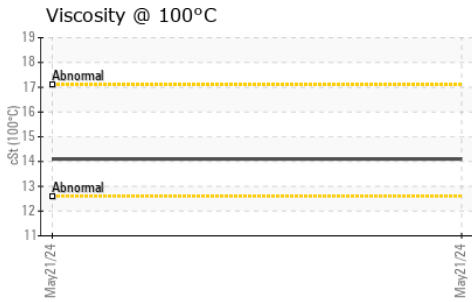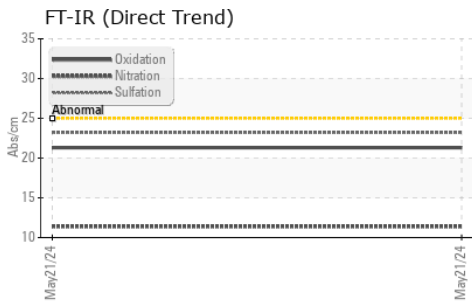

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0100572 **Received** : 28 May 2024  
**Lab Number** : 02637895 **Tested** : 28 May 2024  
**Unique Number** : 5787057 **Diagnosed** : 28 May 2024 - Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 575 - Squamish Hauling**  
 38950 Queens Way,  
 Squamish, BC  
 CA V8B 0K8  
 Contact: Dean Imbeau  
 dimbeau@gflenv.com  
 T: (604)892-5604  
 F: (604)892-5238

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.