



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L580 048547-1464
Component
Splitter Box
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0290955	LH0281485	LH0251461
Sample Date		Client Info		27 May 2024	07 Dec 2023	16 Feb 2023
Machine Age	hrs	Client Info		10162	9037	7024
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	7	10	12
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	2	2
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	0	<1	<1
Lead	ppm	ASTM D5185(m)	>30	0	<1	<1
Copper	ppm	ASTM D5185(m)	>20	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	1	3	4
Potassium	ppm	ASTM D5185(m)	>20	<1	3	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>170	<1	4	1
Boron	ppm	ASTM D5185(m)	400	301	314	312
Barium	ppm	ASTM D5185(m)	200	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	12	0	<1	2
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	12	2	1	4
Calcium	ppm	ASTM D5185(m)	150	19	16	28
Phosphorus	ppm	ASTM D5185(m)	1650	1261	1210	1364
Zinc	ppm	ASTM D5185(m)	125	29	18	35
Sulfur	ppm	ASTM D5185(m)	22500	20132	19993	20225
Visc @ 40°C	cSt	ASTM D7279(m)	143	93.0	92.6	88.2

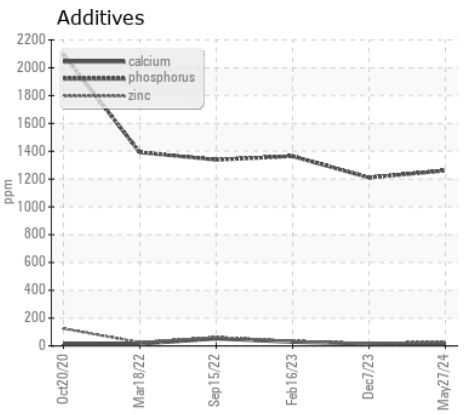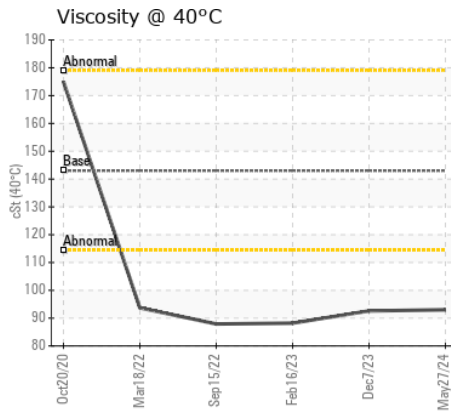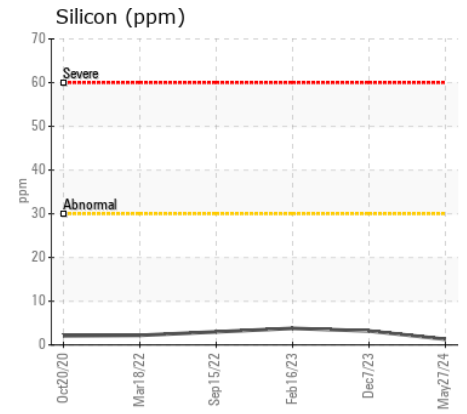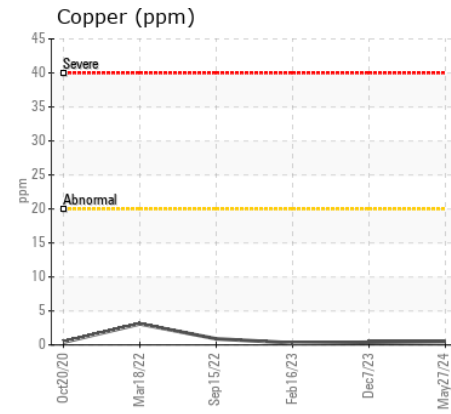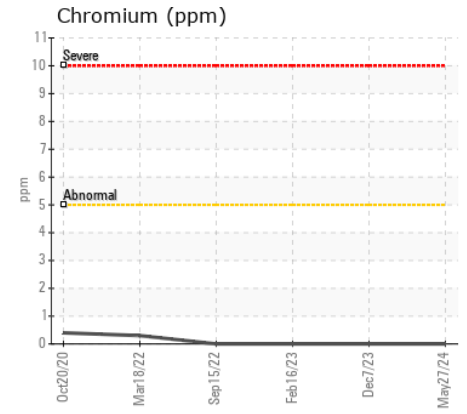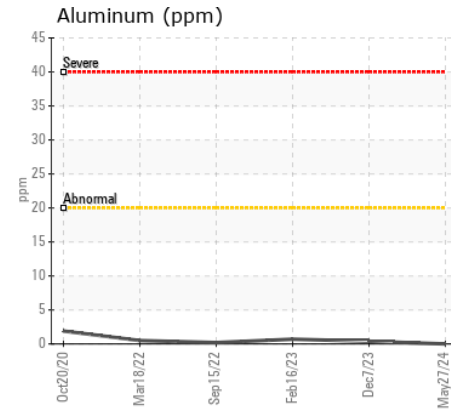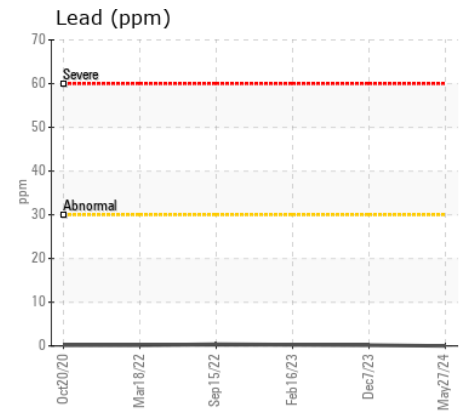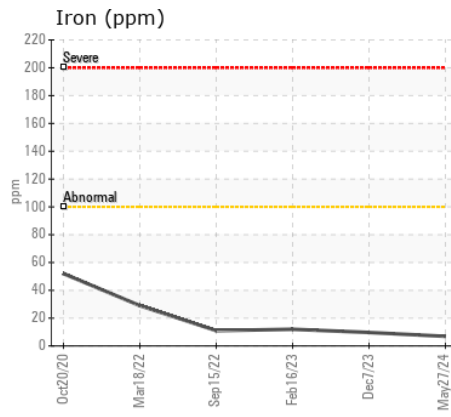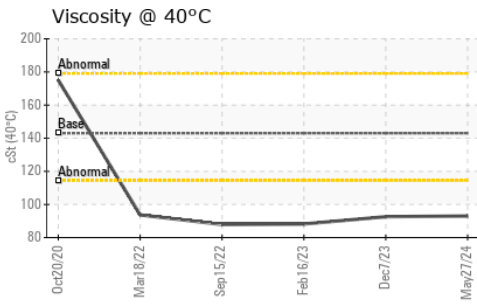

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0290955 **Received** : 28 May 2024
Lab Number : 02638172 **Tested** : 28 May 2024
Unique Number : 5787334 **Diagnosed** : 28 May 2024 - Wes Davis
Test Package : MOB 1

Summit Aggregates
 2686 Greenfield Blvd.
 Ayr, ON
 CA N0B 1E0
 Contact: Bill .
 bill@summitagg.com
 T: (519)500-8146
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.