



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH26M 146752-1252
Component
Splitter Box
Fluid
SAE 75W90 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0266493	LH0266482	LH0266471
Sample Date		Client Info		09 May 2024	30 Jan 2024	16 Oct 2023
Machine Age	hrs	Client Info		3030	2021	1053
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	N/A
Filter Changed		Client Info		None	None	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>100	43	69	51
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	4	4
Lead	ppm	ASTM D5185(m)	>30	<1	2	2
Copper	ppm	ASTM D5185(m)	>20	34	59	51
Tin	ppm	ASTM D5185(m)	>10	<1	1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>30	2	5	4
Potassium	ppm	ASTM D5185(m)	>20	3	4	5
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)	>25	19	38	37
Boron	ppm	ASTM D5185(m)	150	65	5	4
Barium	ppm	ASTM D5185(m)	5	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0	16	<1	0
Manganese	ppm	ASTM D5185(m)		25	70	64
Magnesium	ppm	ASTM D5185(m)	0	445	9	9
Calcium	ppm	ASTM D5185(m)	20	1903	3405	3388
Phosphorus	ppm	ASTM D5185(m)	1200	1101	1150	1135
Zinc	ppm	ASTM D5185(m)	25	1022	1148	1155
Sulfur	ppm	ASTM D5185(m)	22000	7397	8371	8363
Visc @ 40°C	cSt	ASTM D7279(m)	99.5	47.9	41.4	45.8

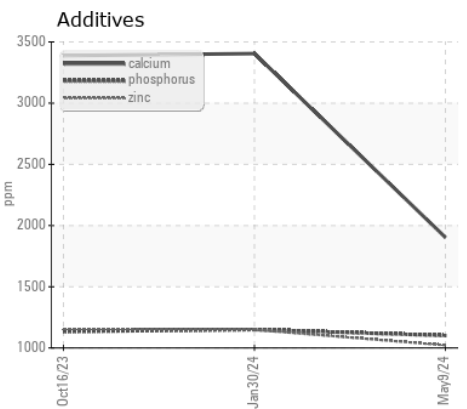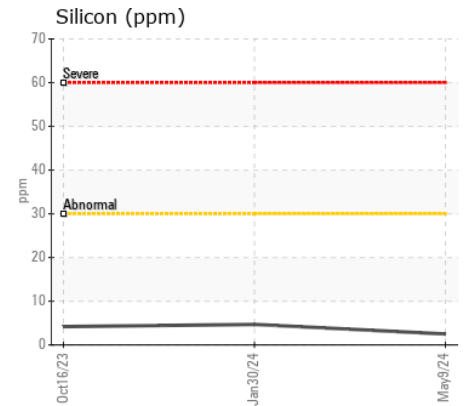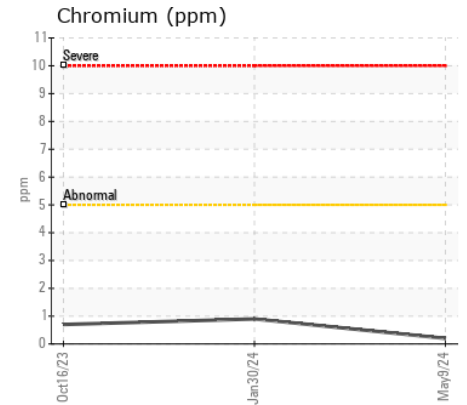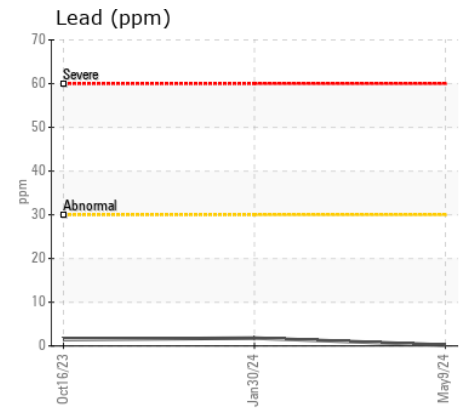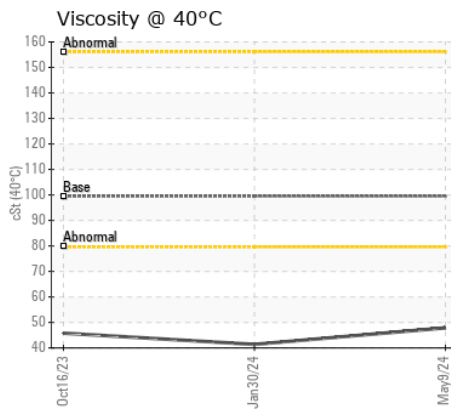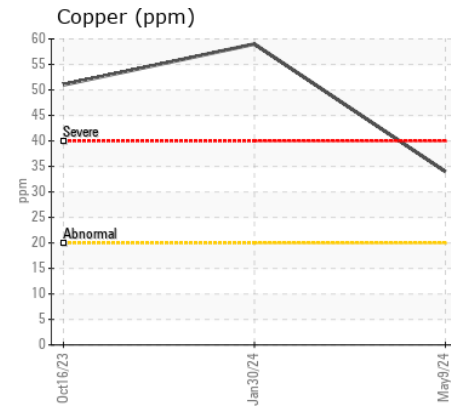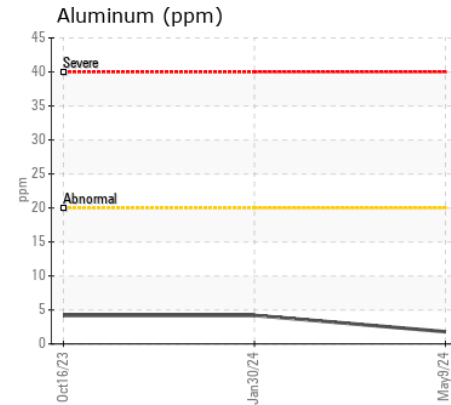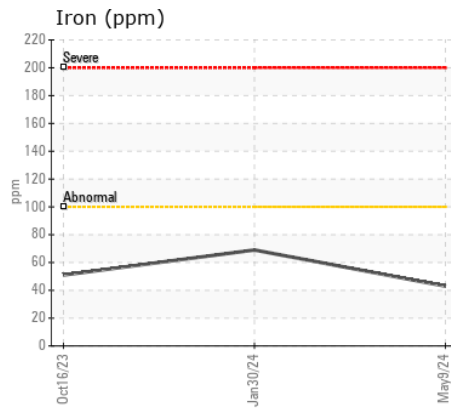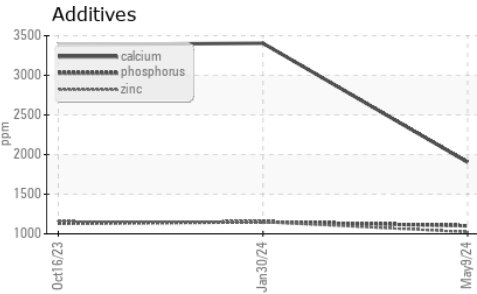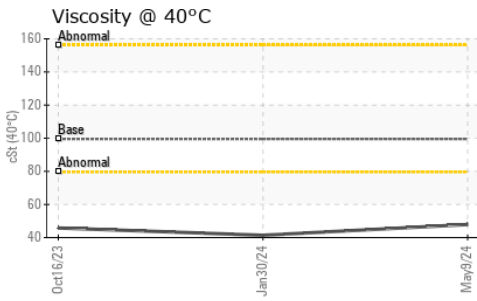

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : LH0266493

Lab Number : 02638221

Unique Number : 5787383

Test Package : MOBCE

Received : 28 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

J.M. CHAMPEAU INC.

491 ROUTE 253

SAINT-MALO, QC

CA J0B 2Y0

Contact: Bruno Champeau

bruno@champeau.com

T: (819)658-2244

F: (819)658-2128