



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
TWIN CITY INTERLOCK [403745]

Machine Id
VOLVO ECR145E 314261

Component
Rear Right Final Drive

Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449287	---	---
Sample Date		Client Info		09 May 2024	---	---
Machine Age	hrs	Client Info		2027	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	494	---	---
Chromium	ppm	ASTM D5185(m)	>10	8	---	---
Nickel	ppm	ASTM D5185(m)	>10	2	---	---
Titanium	ppm	ASTM D5185(m)		1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	20	---	---
Lead	ppm	ASTM D5185(m)	>25	0	---	---
Copper	ppm	ASTM D5185(m)	>50	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	21	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	93	---	---
Potassium	ppm	ASTM D5185(m)	>20	8	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		10	---	---
Boron	ppm	ASTM D5185(m)	379	75	---	---
Barium	ppm	ASTM D5185(m)	0.0	1	---	---
Molybdenum	ppm	ASTM D5185(m)	0.8	0	---	---
Manganese	ppm	ASTM D5185(m)	0.0	7	---	---
Magnesium	ppm	ASTM D5185(m)	31	16	---	---
Calcium	ppm	ASTM D5185(m)	38	261	---	---
Phosphorus	ppm	ASTM D5185(m)	1077	1753	---	---
Zinc	ppm	ASTM D5185(m)	46	127	---	---
Sulfur	ppm	ASTM D5185(m)	23526	18670	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	139	146	---	---

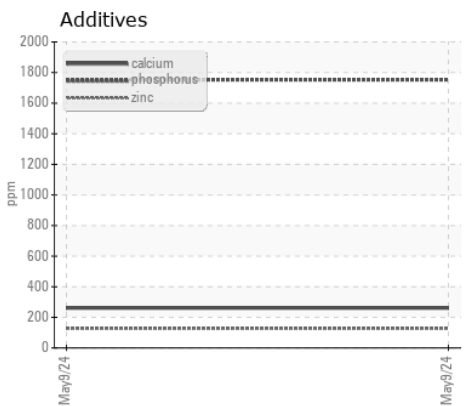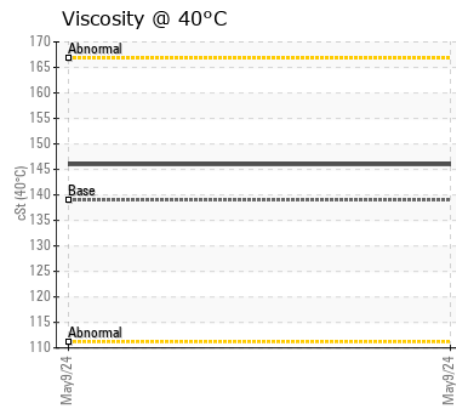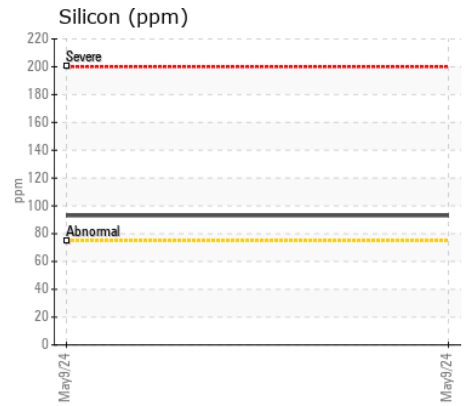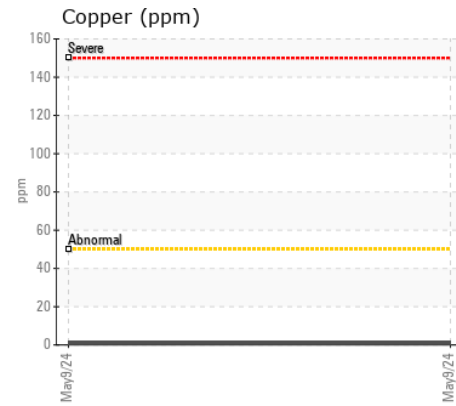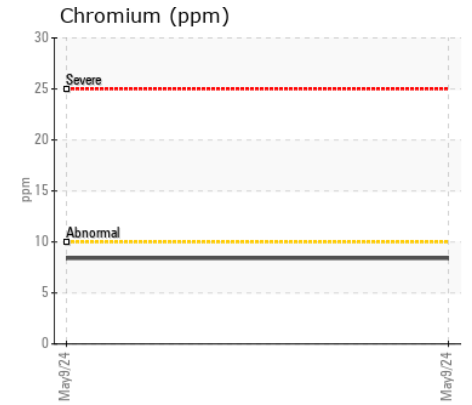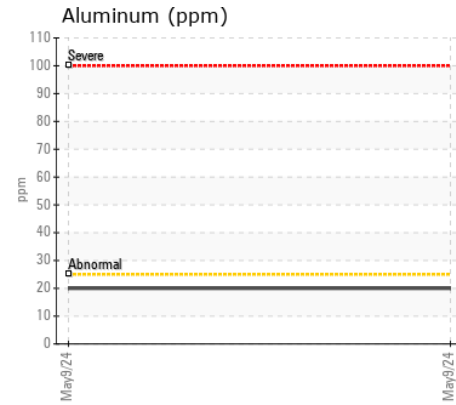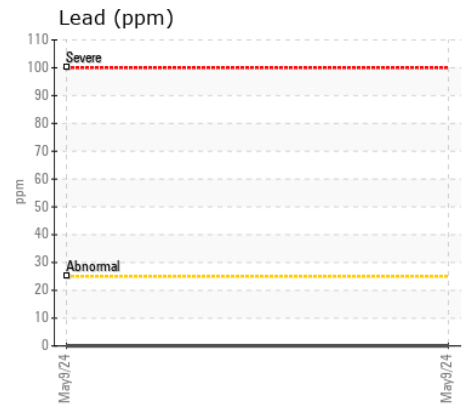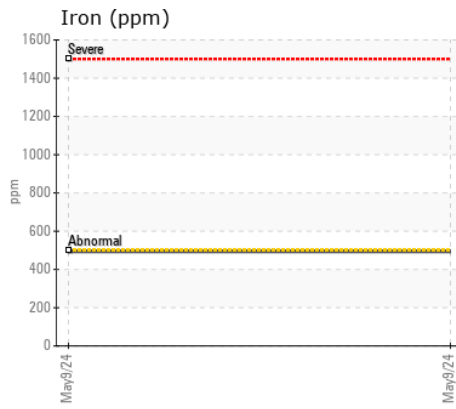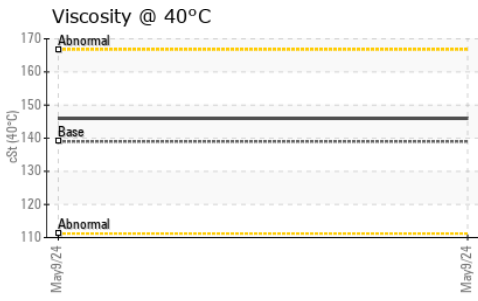

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP449287
Lab Number : 02638229
Unique Number : 5787391
Test Package : MOB 1
Received : 28 May 2024
Tested : 29 May 2024
Diagnosed : 29 May 2024 - Kevin Marson

Strongco Equipment
 5179 Fountain St N.
 Breslau, ON
 CA N0B 1M0
 Contact: Eric Mailloux
 emailoux@strongco.com
 T: (519)744-3518
 F: (519)744-3284

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.