



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1418
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (24 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0078395	PC0082787	PC0077854
Sample Date		Client Info		14 May 2024	01 Mar 2024	30 Nov 2023
Machine Age	kms	Client Info		651813	639592	622900
Oil Age	kms	Client Info		12221	16692	13010
Filter Age	kms	Client Info		12221	16692	13010
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	15	23	76
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	<1	3
Lead	ppm	ASTM D5185(m)	>40	<1	1	4
Copper	ppm	ASTM D5185(m)	>330	32	49	113
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	3	7
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	1.8
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	9.2	10.4	10.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.0	21.6	21.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		52	27	22
Boron	ppm	ASTM D5185(m)	0	3	2	4
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	63	65	60
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	991	982	936
Calcium	ppm	ASTM D5185(m)	1070	1115	1157	1110
Phosphorus	ppm	ASTM D5185(m)	1150	973	869	915
Zinc	ppm	ASTM D5185(m)	1270	1217	1215	1185
Sulfur	ppm	ASTM D5185(m)	2060	2244	2103	2035
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.1	18.7	18.8
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	98.5	101	85.4
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	13.6	13.8	12.3
Viscosity Index (VI)	Scale	ASTM D2270*	139	138	137	139

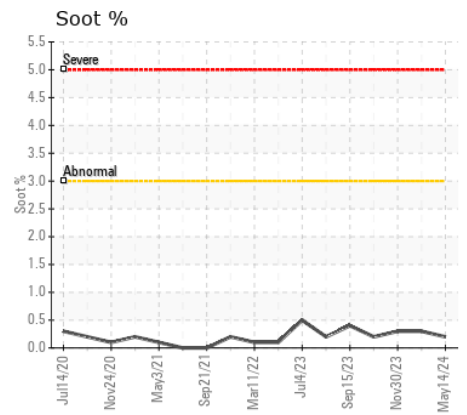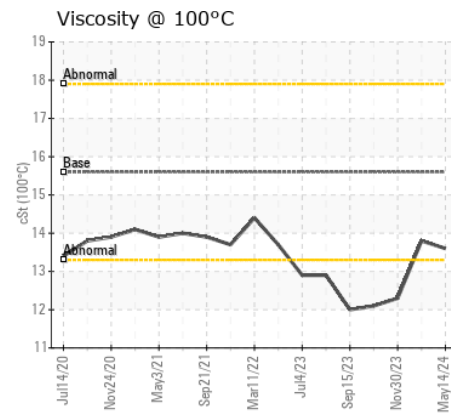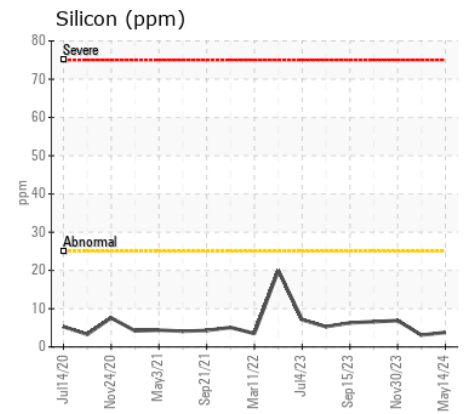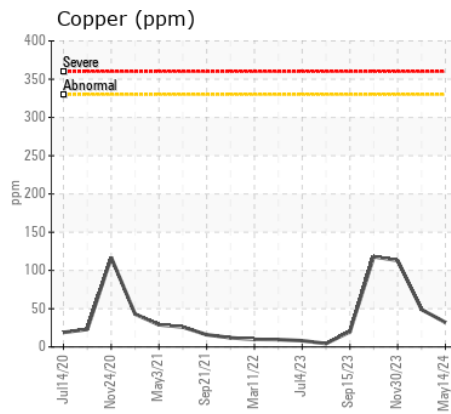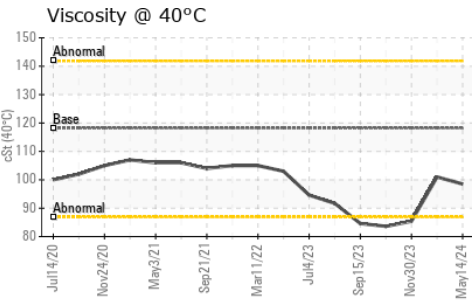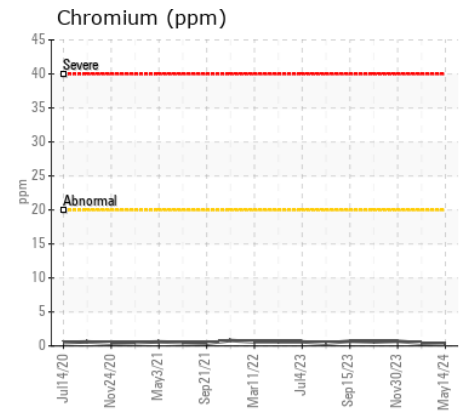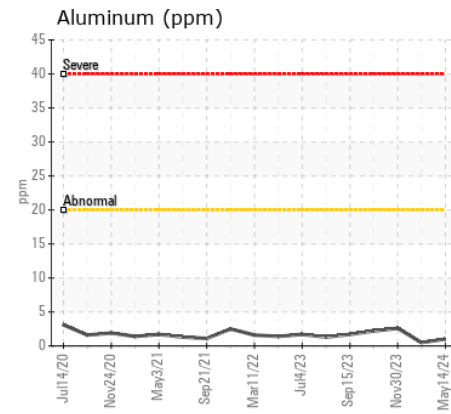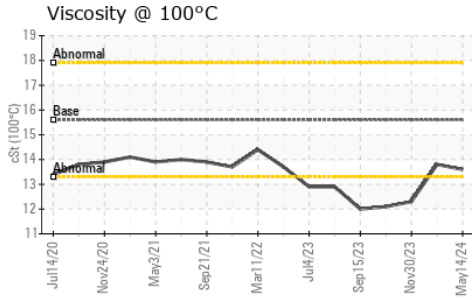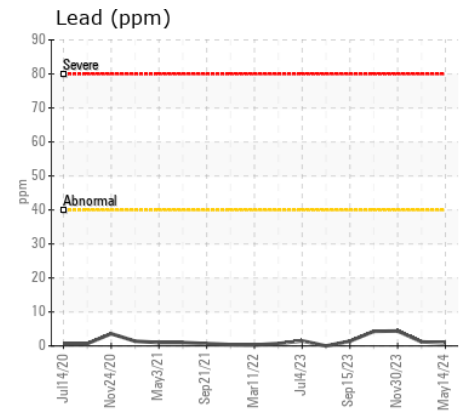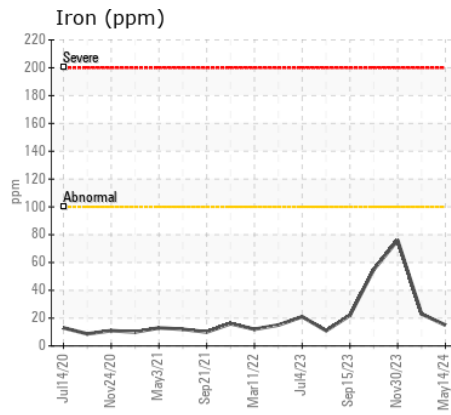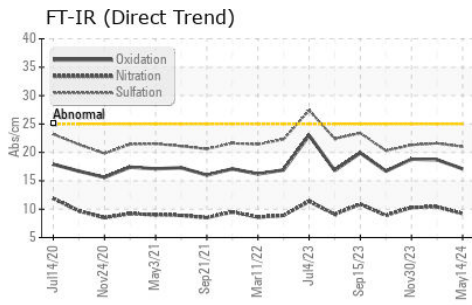

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078395 **Received** : 29 May 2024
Lab Number : 02638327 **Tested** : 29 May 2024
Unique Number : 5787489 **Diagnosed** : 29 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Metrobus Transit
 25 Messenger Drive
 St. John's, NL
 CA A1B 0H6
 Contact: Dan Finlay
 dan.finlay@metrobus.com
 T:
 F: