

Area
GFL216
Machine Id
5547
Component
Diesel Engine
Fluid
CASTROL TECTION EXTRA SAE 15W-40 (40 LTR)

RECOMMENDATION

No corrective action is recommended at this time. Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0121950	GFL0121949	GFL0061859
Sample Date		Client Info		27 May 2024	28 Apr 2024	02 Dec 2022
Machine Age	kms	Client Info		0	727642	693537
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	SEVERE	MARGINAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	8	40	9
Chromium	ppm	ASTM D5185(m)	>20	0	<1	0
Nickel	ppm	ASTM D5185(m)	>5	0	1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	7	3
Lead	ppm	ASTM D5185(m)	>40	<1	10	<1
Copper	ppm	ASTM D5185(m)	>330	<1	2	<1
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	---	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	---	NONE

CONTAMINATION













Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	6	3
Potassium	ppm	ASTM D5185(m)	>20	0	1	<1
Fuel	%	ASTM D7593*	>3.0	1.7	▲ 6.3	▲ 3.2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0	0.6	0
Nitration	Abs/cm	ASTM D7624*	>20	6.2	11.7	7.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.8	25.8	19.9
Silt	scalar	Visual*	NONE	VLITE	---	NONE
Debris	scalar	Visual*	NONE	NONE	---	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	---	VLITE
Appearance	scalar	Visual*	NORML	NORML	---	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	8	4
Boron	ppm	ASTM D5185(m)	30	8	49	4
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		60	97	57
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	110	900	683	930
Calcium	ppm	ASTM D5185(m)	2740	1012	1286	1069
Phosphorus	ppm	ASTM D5185(m)	1240	934	659	1044
Zinc	ppm	ASTM D5185(m)	1350	1073	781	1152
Sulfur	ppm	ASTM D5185(m)	3520	2396	1942	2587
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.1	22.4	15.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.2	13.5	▲ 11.6	13.1

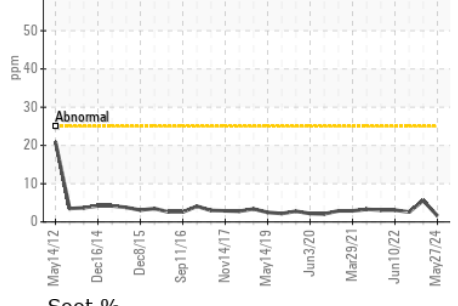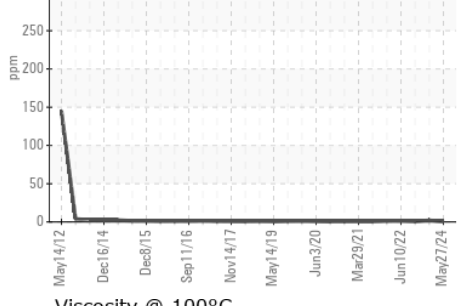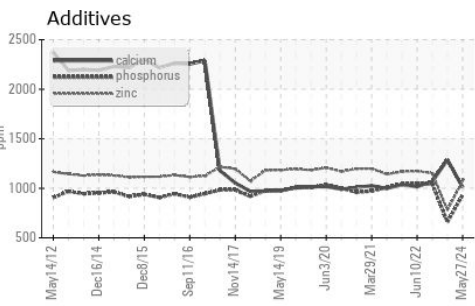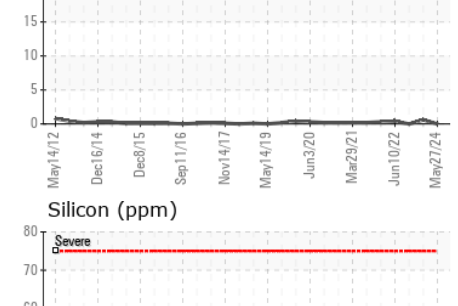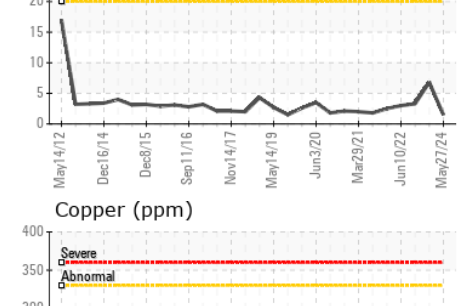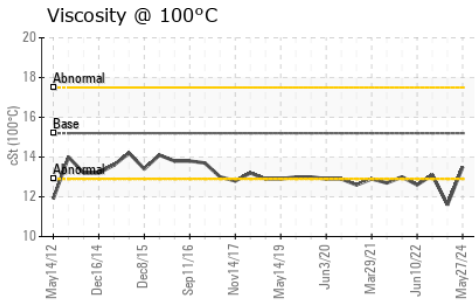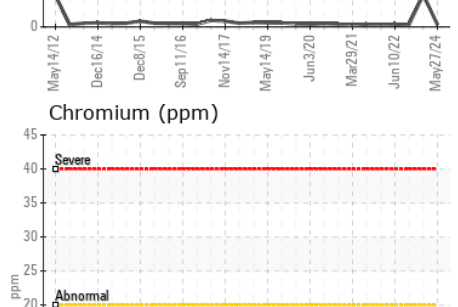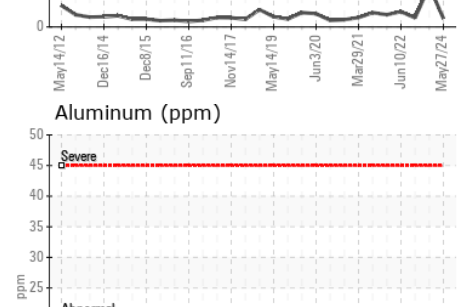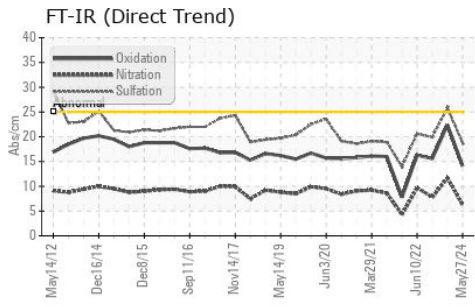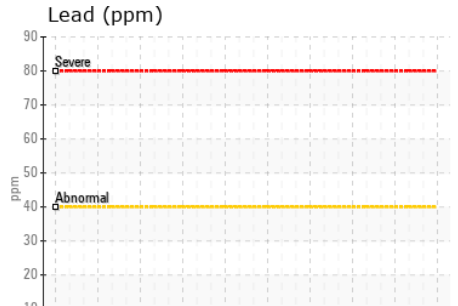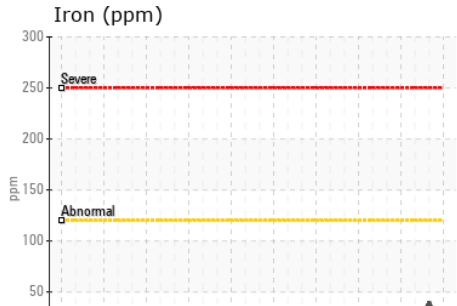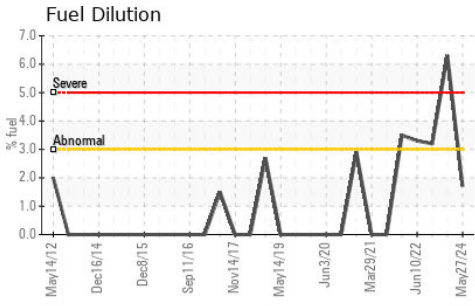

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0121950 **Received** : 29 May 2024
Lab Number : 02638340 **Tested** : 30 May 2024
Unique Number : 5787502 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel, Visual)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GFL Environmental - 252 - GTA Hauling
 3668 Weston Road
 North York, ON
 CA M9L 1W2
 Contact: Amanda Cipollone
 acipollone@gflenv.com
 T:
 F: