

Machine Id
BS #22
Component
Diesel Engine
Fluid
PETRO CANADA SUPREME SYNTHETIC 0W30 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0072922	---	---
Sample Date		Client Info		22 May 2024	---	---
Machine Age	hrs	Client Info		1069	---	---
Oil Age	hrs	Client Info		253	---	---
Filter Age	hrs	Client Info		253	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	9	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	4	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	6	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.3	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.1	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.7	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	185	<1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	78	59	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	564	969	---	---
Calcium	ppm	ASTM D5185(m)	984	1005	---	---
Phosphorus	ppm	ASTM D5185(m)	748	1014	---	---
Zinc	ppm	ASTM D5185(m)	822	1154	---	---
Sulfur	ppm	ASTM D5185(m)	2584	2516	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.4	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	54.79	54.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.10	9.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	174	170	---	---

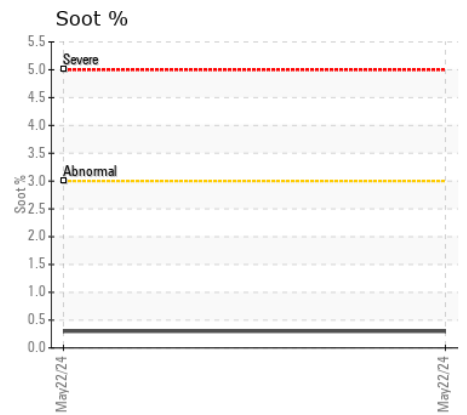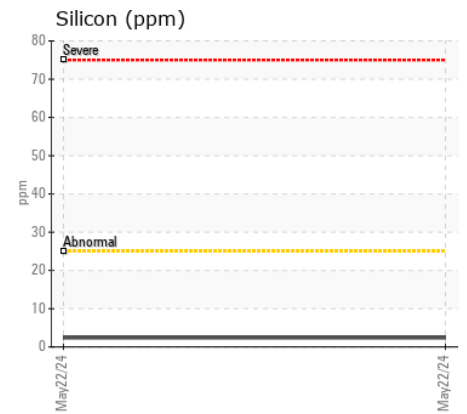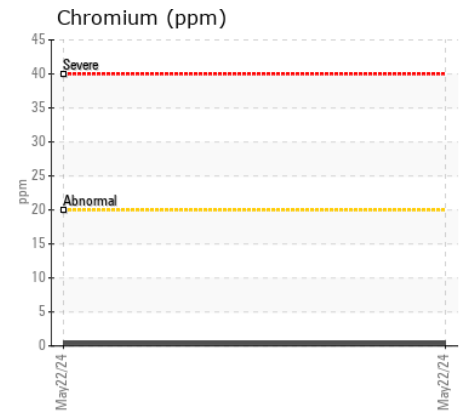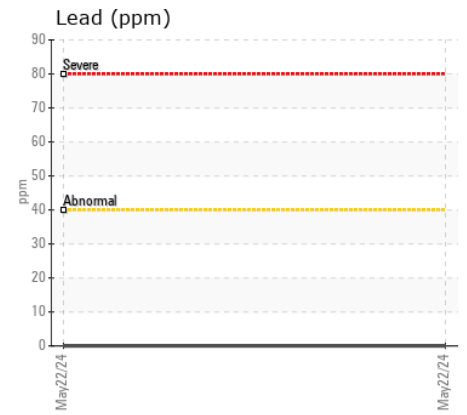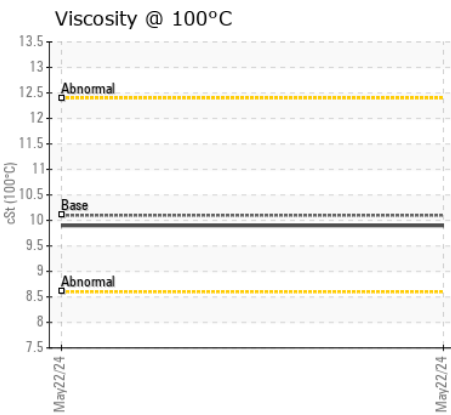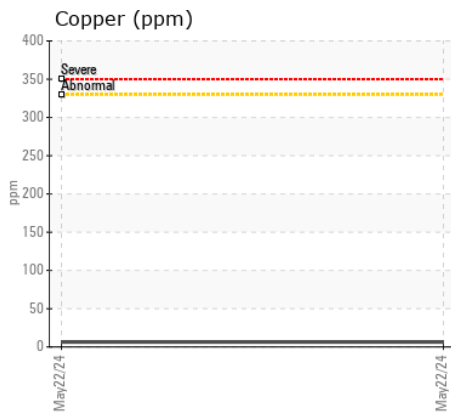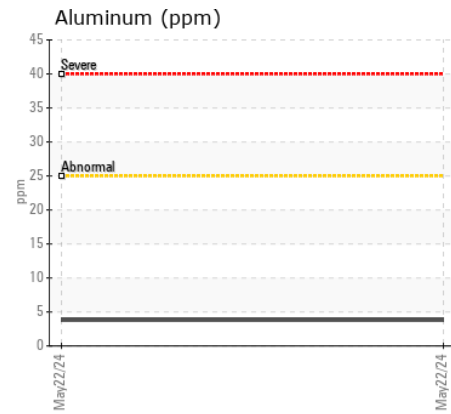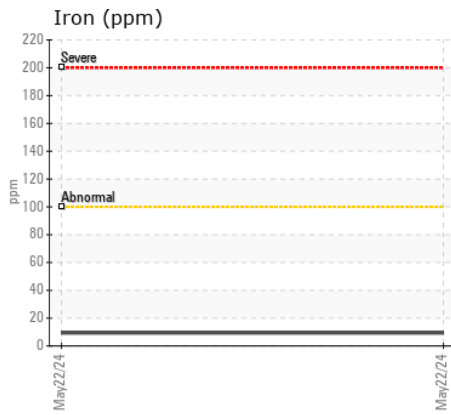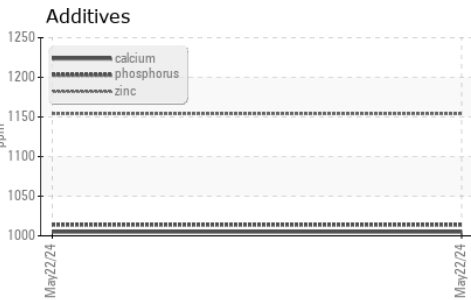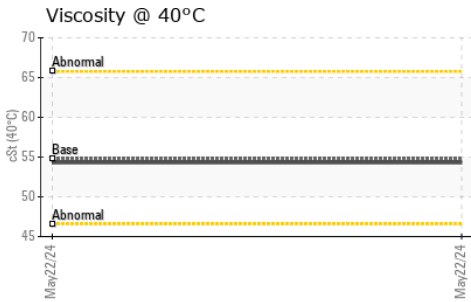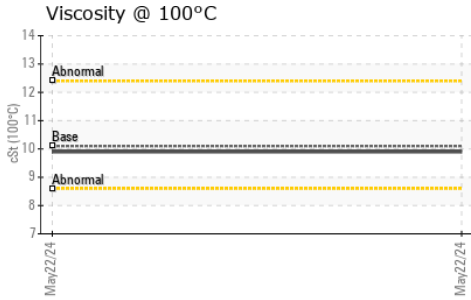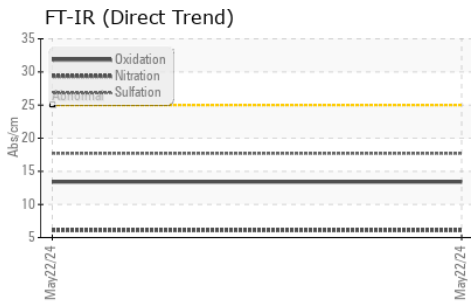

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0072922 **Received** : 29 May 2024
Lab Number : **02638406** **Tested** : 29 May 2024
Unique Number : 5787568 **Diagnosed** : 29 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

THE GEORGIAN PEAKS CLUB
 P.O. BOX 400
 THORNBURY, ON
 CA N0H 2P0
 Contact: Darrell Dennis
 darrell@georgianpeaks.com
 T: (519)599-6771
 F: (519)599-2026