



Machine Id
7104
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0113292 | GFL0097542 | GFL0074288 |
| Sample Date | | Client Info | | 26 May 2024 | 02 Dec 2023 | 11 Jul 2023 |
| Machine Age | hrs | Client Info | | 17364 | 16236 | 15017 |
| Oil Age | hrs | Client Info | | 1128 | 1219 | 1606 |
| Filter Age | hrs | Client Info | | 1128 | 1219 | 1606 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|---------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185(m) | >50 | 24 | 17 | 11 |
| Chromium | ppm | ASTM D5185(m) | >4 | 1 | 1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >2 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >9 | 3 | 2 | 2 |
| Lead | ppm | ASTM D5185(m) | >30 | 2 | 2 | <1 |
| Copper | ppm | ASTM D5185(m) | >35 | 6 | 7 | 4 |
| Tin | ppm | ASTM D5185(m) | >4 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| White Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |

CONTAMINATION











There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|---------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185(m) | >+100 | 3 | 4 | 3 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | <1 | <1 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Soot % | % | ASTM D7844* | | 0 | 0 | 0 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 12.8 | 12.8 | 10.3 |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 26.7 | 25.5 | 20.4 |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|--------------|----------|---------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185(m) | | 10 | 9 | 7 |
| Boron | ppm | ASTM D5185(m) | 50 | 6 | 9 | 13 |
| Barium | ppm | ASTM D5185(m) | 5 | 0 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 50 | 56 | 56 | 51 |
| Manganese | ppm | ASTM D5185(m) | 0 | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185(m) | 560 | 598 | 590 | 593 |
| Calcium | ppm | ASTM D5185(m) | 1510 | 1741 | 1690 | 1583 |
| Phosphorus | ppm | ASTM D5185(m) | 780 | 751 | 708 | 774 |
| Zinc | ppm | ASTM D5185(m) | 870 | 948 | 952 | 904 |
| Sulfur | ppm | ASTM D5185(m) | 2040 | 1956 | 1968 | 1944 |
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 21.7 | 21.7 | 18.1 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.1 | 14.8 | 14.9 | 15.1 |

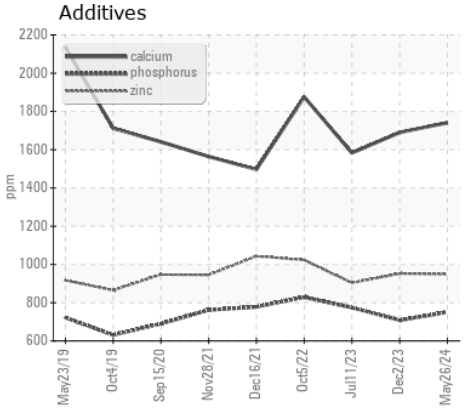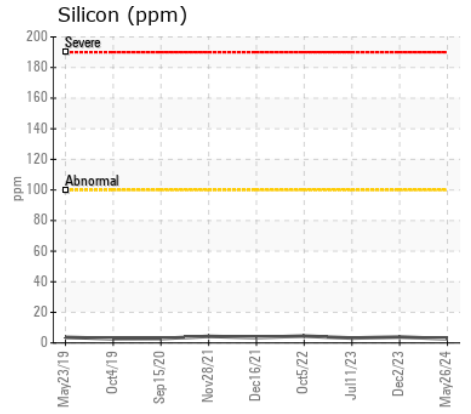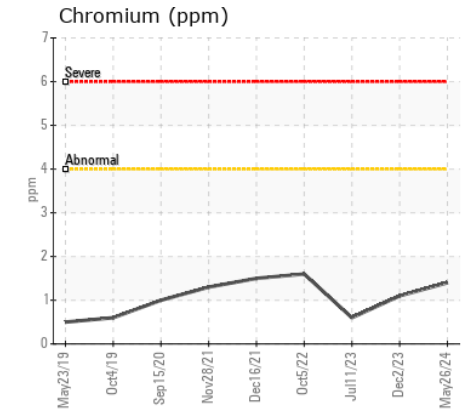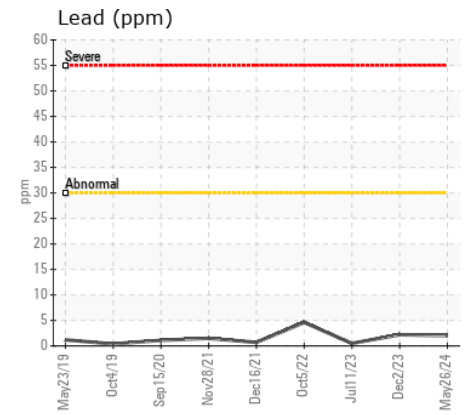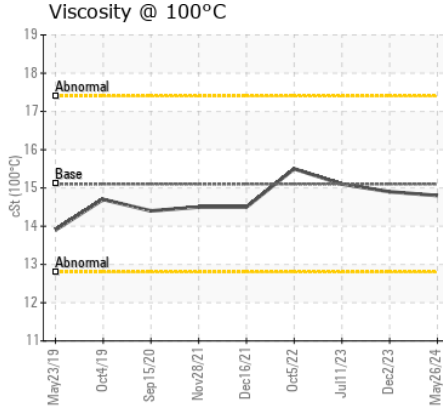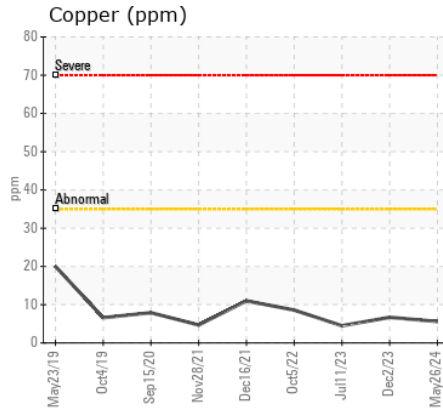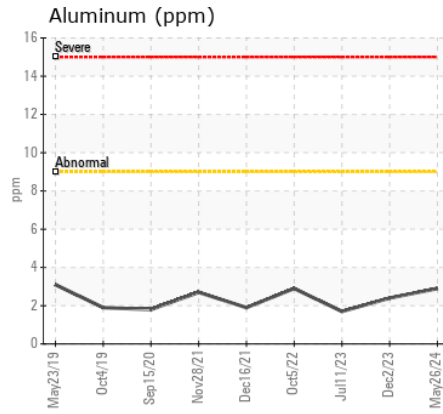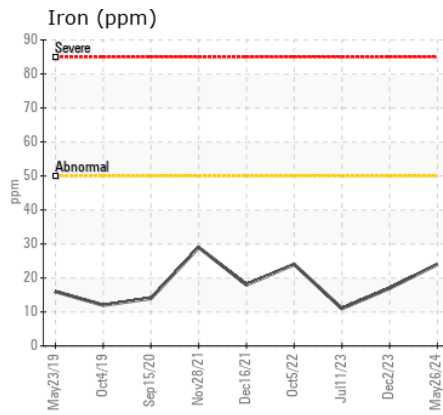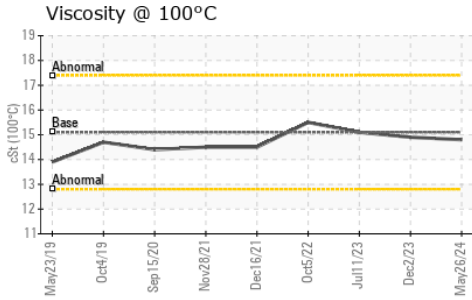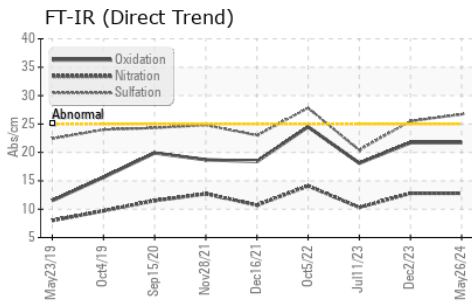

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113292 **Received** : 29 May 2024
Lab Number : 02638436 **Tested** : 29 May 2024
Unique Number : 5787598 **Diagnosed** : 29 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GFL Environmental - 216
 15 Bermondsey Road
 Toronto, ON
 CA M4B 1Y9
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F: