



Scoop 10 Yard LHD1502 Component Hydraulic System Fluid NOT GIVEN (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Num	ber	Client Info		PC0048743	PC0046789	
Sample Date		Client Info		04 May 2024	02 May 2021	
Machine Ag	e hrs	Client Info		2699	0	
Oil Age	hrs	Client Info		0	0	
Filter Age	hrs	Client Info		0	0	
Oil Change	d	Client Info		N/A	N/A	
Filter Chang	ged	Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
				_		
Iron	ppm	ASTM D5185(m)	>20	8	7	
Chromium	ppm	ASTM D5185(m)	>10	0	<1	
Nickel	ppm	ASTM D5185(m)	>10	0	0	
Titanium	ppm	ASTM D5185(m)		0	<1	
Silver	ppm	ASTM D5185(m)	10	0	<1	
Aluminum	ppm	ASTM D5185(m)	>10	2	2	
Lead	ppm	ASTM D5185(m)	>10	0	<1	
Copper	ppm	ASTM D5185(m)	>75	1	1	
Tin	ppm	ASTM D5185(m)	>10	0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
White Meta		Visual*	NONE	NONE	NONE	
Yellow Meta	al scalar	Visual*	NONE	NONE	VLITE	
Silicon	ppm	ASTM D5185(m)	>20	10	11	
Potassium	ppm	ASTM D5185(m)	>20	0	2	
Water		WC Method	>0.1	NEG	NEG	
Silt	scalar	Visual*	NONE	VLITE	NONE	
Debris	scalar	Visual*	NONE	VLITE	NONE	
Sand/Dirt	scalar	Visual*	NONE	NONE	LTMOD	
Appearance	e scalar	Visual*	NORML	NORML	NORML	
Odor	scalar	Visual*	NORML	NORML	NORML	
Emulsified W	ater scalar	Visual*	>0.1	NEG	NEG	
Sodium	ppm	ASTM D5185(m)		<1	7	
Boron	ppm	ASTM D5185(m)		93	83	
Barium	ppm	ASTM D5185(m)		0	<1	
Molybdenur		ASTM D5185(m)		0	3	
Manganese		ASTM D5185(m)		0	<1	
Magnesium		ASTM D5185(m)		17	47	
Calcium	ppm	ASTM D5185(m)		3241	3017	
Phosphorus		ASTM D5185(m)		1126	1006	
Zinc	ppm	ASTM D5185(m)		1330	1321	
Sulfur	ppm	ASTM D5185(m)		2640	2629	
Visc @ 40°		ASTM D7279(m)		50.1	50.8	
Visc @ 100		ASTM D7279(m)		8.2	8.2	
		. /				

136 133 ---Submitted By: Edward Katic

NORMAL


NORMAL


NORMAL


WEAR

CONTAMINATION

FLUID CONDITION

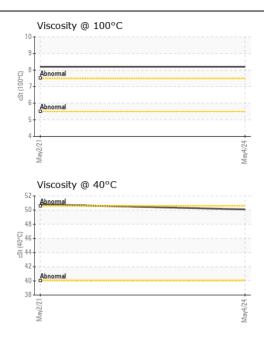

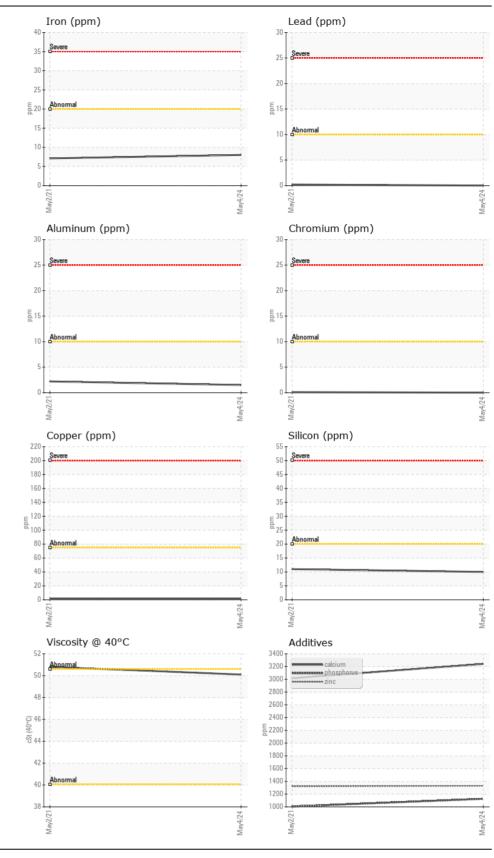

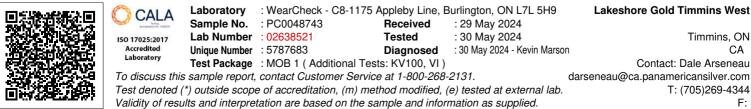

Submitted By: Edward Katic Page 2 of 2