



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**PORT TRANSMISSION**  
Component  
**Transmission (Auto)**  
Fluid  
**ATF (--- LTR)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0948709	---	---
Sample Date		Client Info		23 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	91	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	4	---	---
Lead	ppm	ASTM D5185(m)	>50	26	---	---
Copper	ppm	ASTM D5185(m)	>225	62	---	---
Tin	ppm	ASTM D5185(m)	>10	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	---	---
Boron	ppm	ASTM D5185(m)		75	---	---
Barium	ppm	ASTM D5185(m)		7	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		4	---	---
Calcium	ppm	ASTM D5185(m)		182	---	---
Phosphorus	ppm	ASTM D5185(m)		257	---	---
Zinc	ppm	ASTM D5185(m)		43	---	---
Sulfur	ppm	ASTM D5185(m)		1883	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	32.0	21.4	---	---

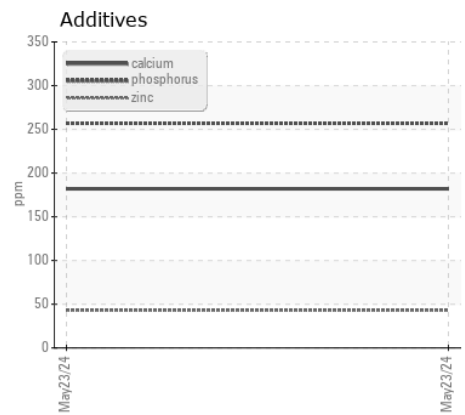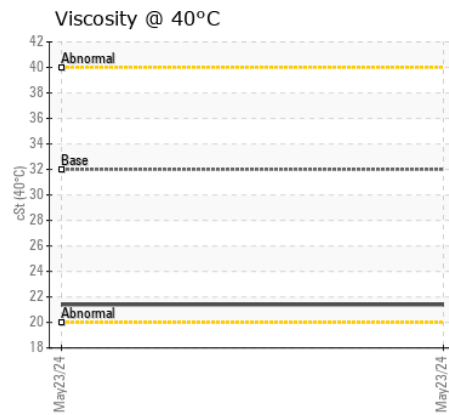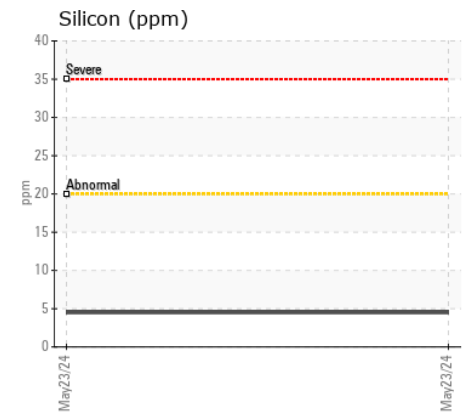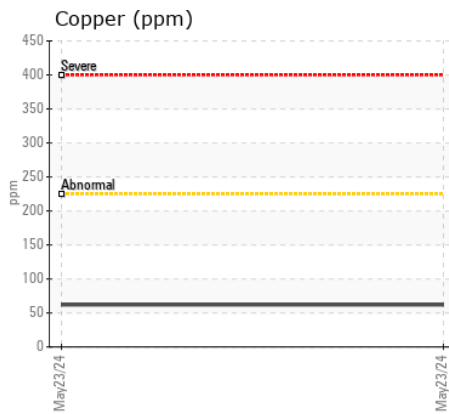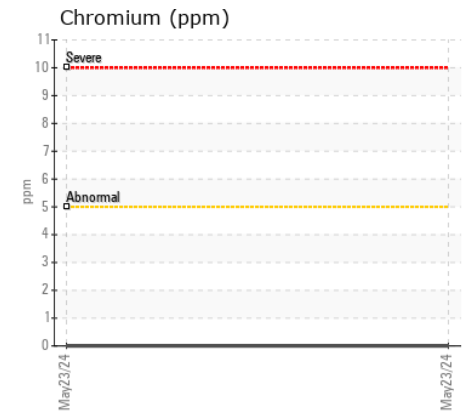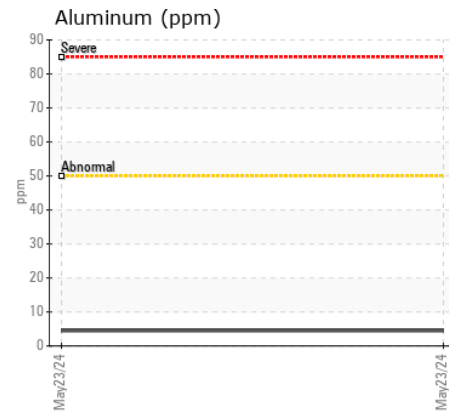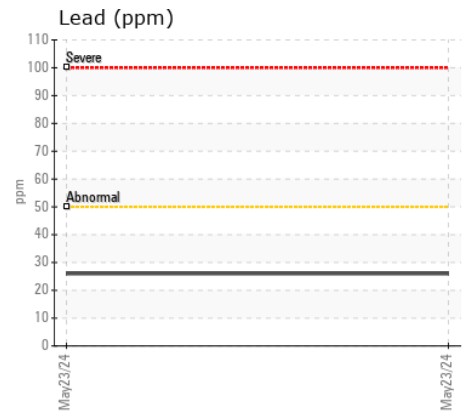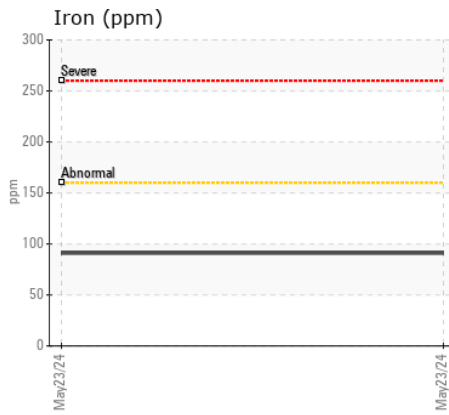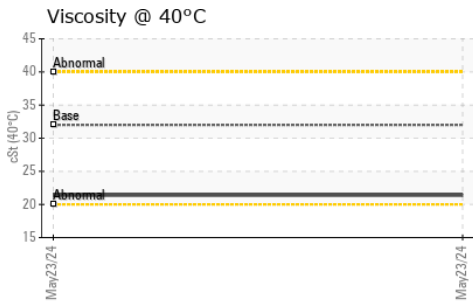

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0948709 **Received** : 29 May 2024  
**Lab Number** : 02638539 **Tested** : 30 May 2024  
**Unique Number** : 5787701 **Diagnosed** : 30 May 2024 - Wes Davis  
**Test Package** : MOB 1

**LW DIESEL INC**  
 7828 HWY 89 WEST  
 ALLISTON, ON  
 CA L9R 1V1  
 Contact: Larry White  
 lwhite@lwdieselinco.com  
 T: (705)984-3406  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.