



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH60M 147037-1217

Component
Rear Right Wheel Hub

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0288087	LH0131740	LH0271335
Sample Date		Client Info		24 May 2024	03 Feb 2024	31 Oct 2023
Machine Age	hrs	Client Info		3180	2067	1062
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>650	85	22	14
Chromium	ppm	ASTM D5185(m)	>4	<1	0	0
Nickel	ppm	ASTM D5185(m)	>4	0	0	0
Titanium	ppm	ASTM D5185(m)	>4	0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	1	<1	<1
Lead	ppm	ASTM D5185(m)	>4	0	0	<1
Copper	ppm	ASTM D5185(m)	>60	19	6	7
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	VLITE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	4	3	3
Potassium	ppm	ASTM D5185(m)	>20	6	1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	3	2
Boron	ppm	ASTM D5185(m)	328	314	308	315
Barium	ppm	ASTM D5185(m)	1	<1	0	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		2	0	0
Magnesium	ppm	ASTM D5185(m)	1	2	<1	<1
Calcium	ppm	ASTM D5185(m)	7	15	18	11
Phosphorus	ppm	ASTM D5185(m)	1145	1310	1252	1266
Zinc	ppm	ASTM D5185(m)	3	21	13	10
Sulfur	ppm	ASTM D5185(m)	17909	21257	21283	21815
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	91.9	98.7	103

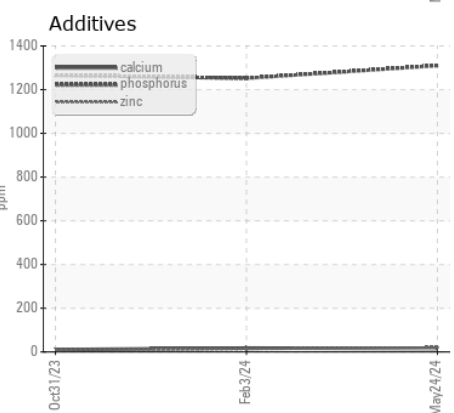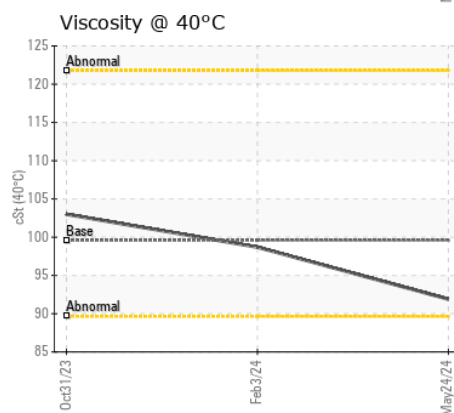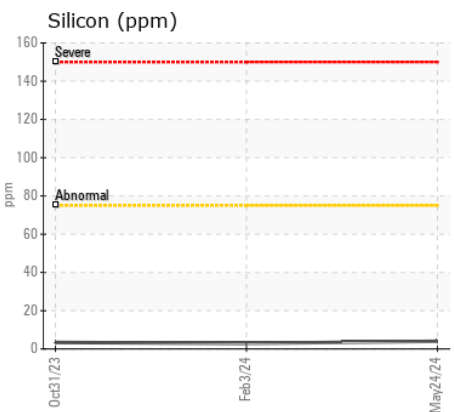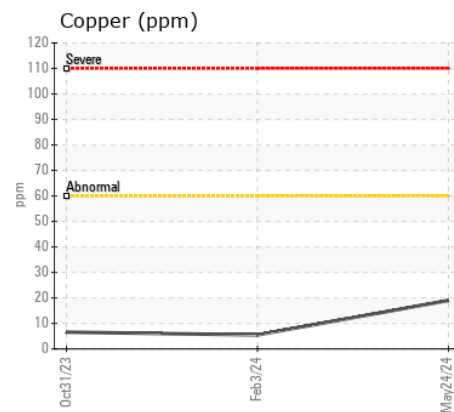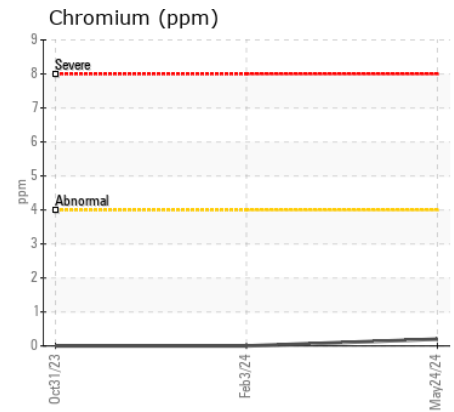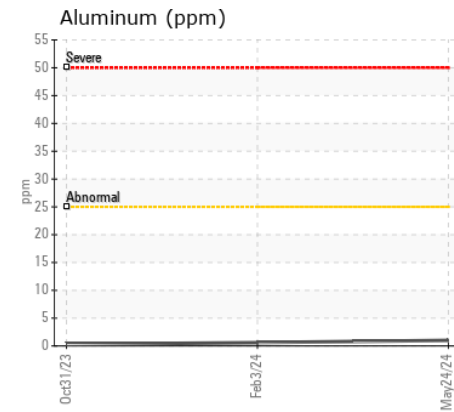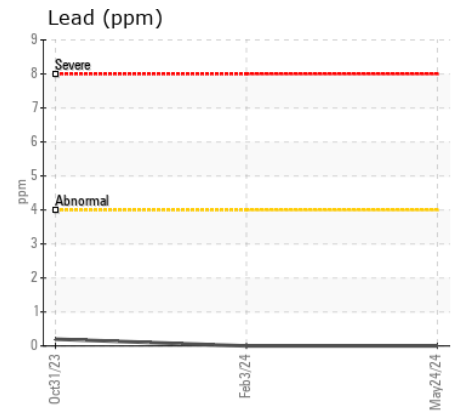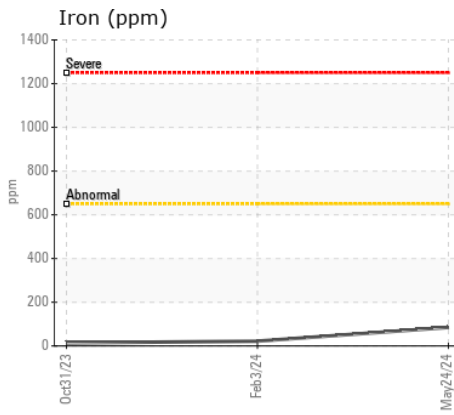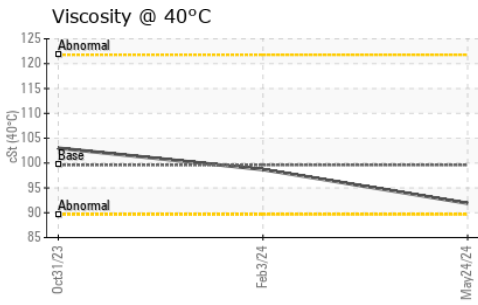

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0288087
Lab Number : 02638573
Unique Number : 5787735
Test Package : MOB 1
Received : 29 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Wes Davis

STELLA JONES INC
 25 BRAID ST
 NEW WESTMINSTER, BC
 CA V3L 3P2
 Contact: Richard Vogel
 rvoegel@stella-jones.com
 T: (604)999-9220
 F: (604)526-8597

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.