



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINANTS	NORMAL
OIL CONDITION	NORMAL




Machine Id
EGR-2212 (S/N 6919558)
 Component
2 Main Engine
 Fluid
SHELL ROTELLA T4 15W40 (900 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

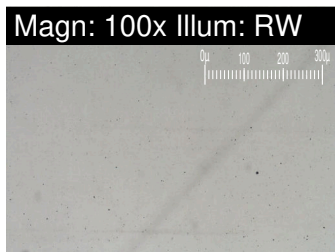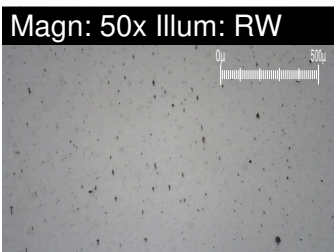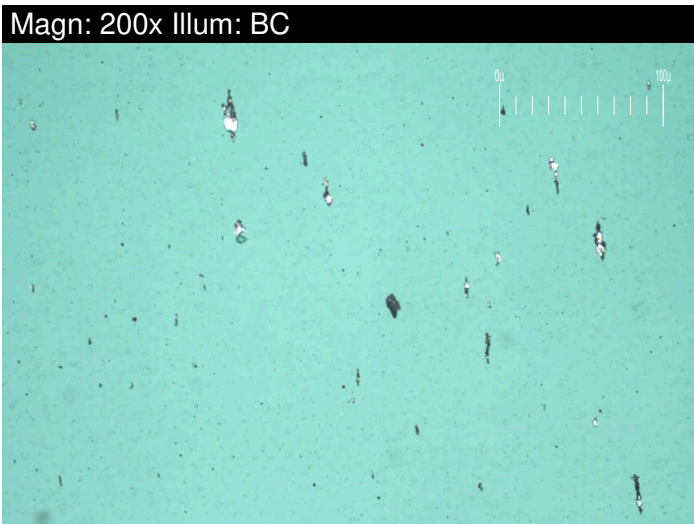

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0910242	WC0574867	WC0494649
Sample Date		Client Info		19 May 2024	31 Dec 2023	16 Aug 2023
Machine Age	hrs	Client Info		68000	67500	67000
Oil Age	hrs	Client Info		3242	2742	2242
Filter Age	hrs	Client Info		3242	2742	2242
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

PQ		ASTM D8184*		0	0	0
Iron	ppm	ASTM D5185(m)	>75	5	4	4
Chromium	ppm	ASTM D5185(m)	>8	0	0	<1
Nickel	ppm	ASTM D5185(m)	>2	0	0	0
Titanium	ppm	ASTM D5185(m)	>3	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<1	1	<1
Lead	ppm	ASTM D5185(m)	>18	0	0	0
Copper	ppm	ASTM D5185(m)	>80	1	1	1
Tin	ppm	ASTM D5185(m)	>14	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Large Particles		DR-Ferr*		10.7	7.9	1.9
Small Particles		DR-Ferr*		7.6	6.0	1.7
Total Particles		DR-Ferr*	>---	18.3	13.9	3.6
Large Particles Percentage	%	DR-Ferr*		16.9	13.7	5.6
Severity Index		DR-Ferr*		33	15	0
Ferrous Rubbing	Scale 0-10	ASTM D7684*		2	1	1
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				

CONTAMINANTS

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>20	<1	2	2
Potassium	ppm	ASTM D5185(m)	>20	7	7	6
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*		0.1	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	9.4	9.4	9.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.0	22.4	22.7
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		2	2	1

OIL CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>75	2	3	3
Boron	ppm	ASTM D5185(m)		111	105	112
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		1	2	2
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		18	17	20
Calcium	ppm	ASTM D5185(m)		2288	2248	2224
Phosphorus	ppm	ASTM D5185(m)		992	989	1000
Zinc	ppm	ASTM D5185(m)		1155	1136	1126
Sulfur	ppm	ASTM D5185(m)		2906	3138	2926
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.1	18.6	17.7
Base Number (BN)	mg KOH/g	ASTM D2896*	10.1	7.51	7.35	6.64
Visc @ 100°C	cSt	ASTM D7279(m)	15	13.5	13.4	13.5
Lubricant Degradation	Scale 0-10	ASTM D7684*				


Ferrous Alloys

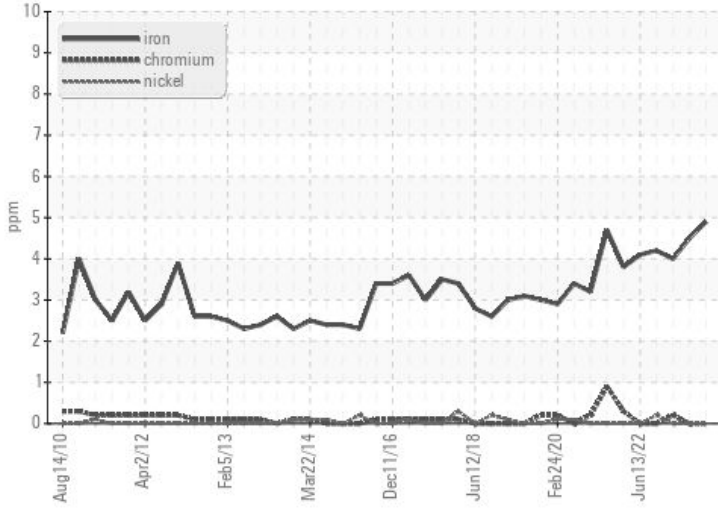


Non-ferrous Metals

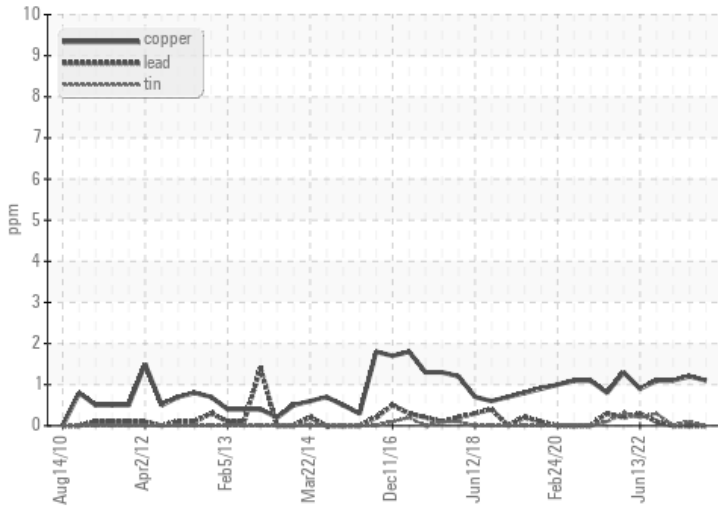


Viscosity @ 100°C

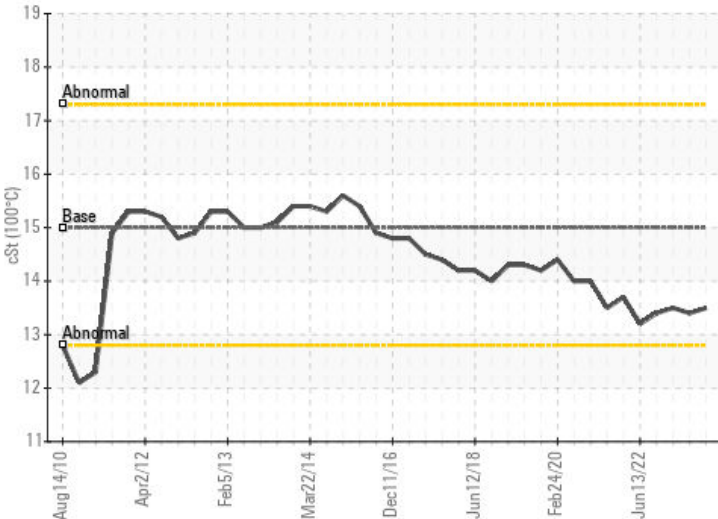

PQ

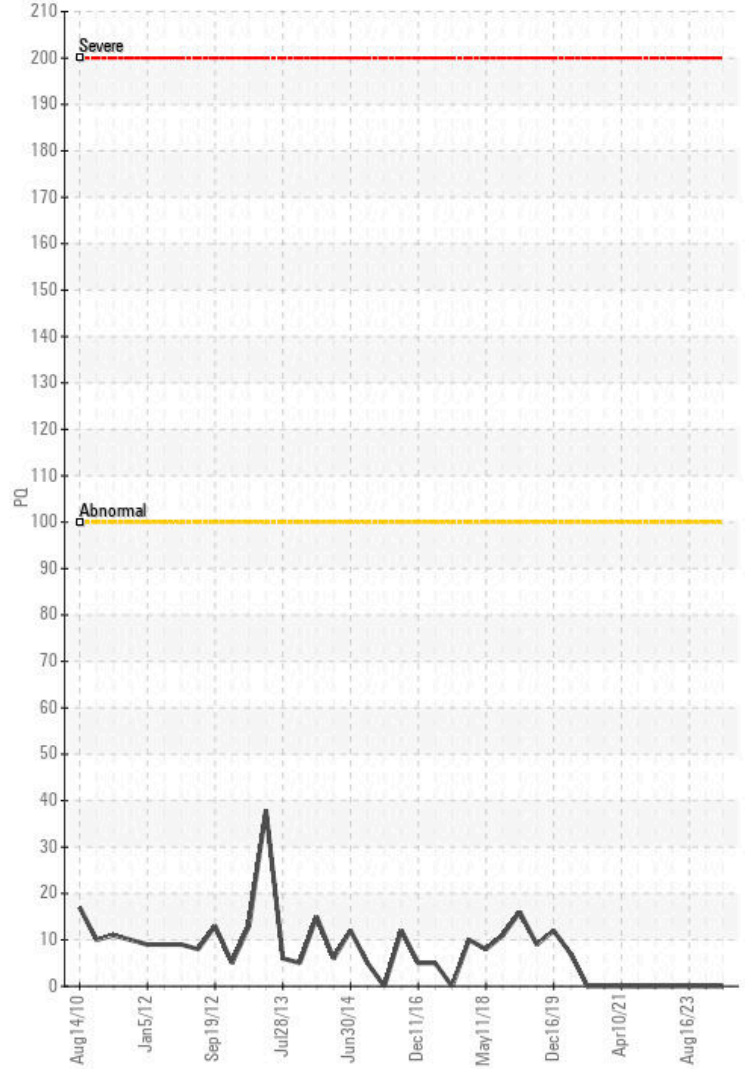

Base Number

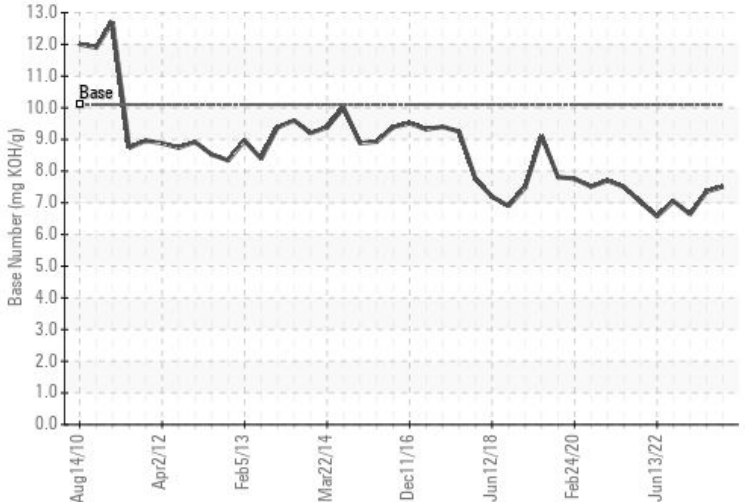

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0910242
Lab Number : 02638773
Unique Number : 5787935
Test Package : MAR 3

DFO, CCGS EARL GREY
 PO BOX 1006, 1 CHALLENGER DR.
 DARTMOUTH, NS
 CA B2Y 4A2
 Contact: Chief Engineer
 earlgreyCE@EGR.ccs-ngcc.gc.ca
 T: (902)456-9285
 F: (902)456-9285

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

This page left intentionally blank