

Machine Id
201019
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0108217	GFL0047690	GFL0024242
Sample Date		Client Info		16 Apr 2024	15 Feb 2023	13 Jan 2022
Machine Age	hrs	Client Info		14156	0	11076
Oil Age	hrs	Client Info		500	350	0
Filter Age	hrs	Client Info		500	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	9	6	14
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	2	1	3
Lead	ppm	ASTM D5185(m)	>40	0	<1	1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	3	4
Potassium	ppm	ASTM D5185(m)	>20	1	0	<1
Fuel	%	ASTM D7593*	>2.0	▲ 3.7	▲ 2.7	▲ 2.7
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	8.2	6.9	8.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.8	18.7	19.4
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		1	1	<1
Boron	ppm	ASTM D5185(m)	2	2	2	12
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	60	60	54
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	950	971	987	969
Calcium	ppm	ASTM D5185(m)	1050	1083	1066	1040
Phosphorus	ppm	ASTM D5185(m)	995	1043	1032	1015
Zinc	ppm	ASTM D5185(m)	1180	1197	1208	1130
Sulfur	ppm	ASTM D5185(m)	2600	2607	2649	2575
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.1	15.4	15.6
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	▲ 9.6	▲ 10.0	▲ 9.9

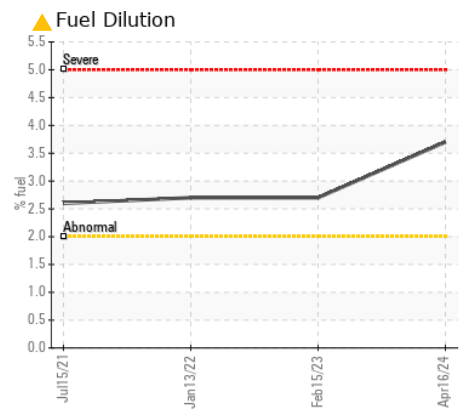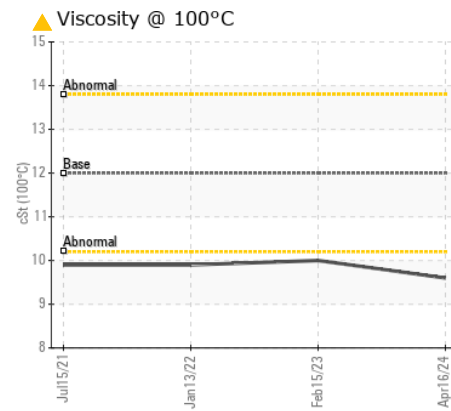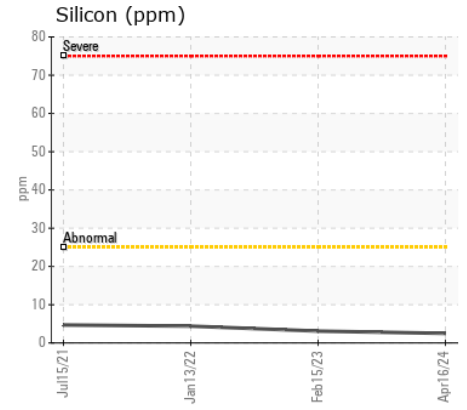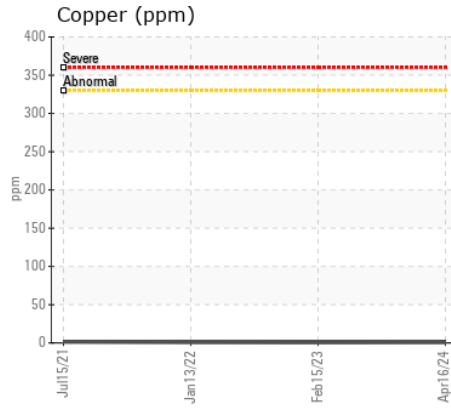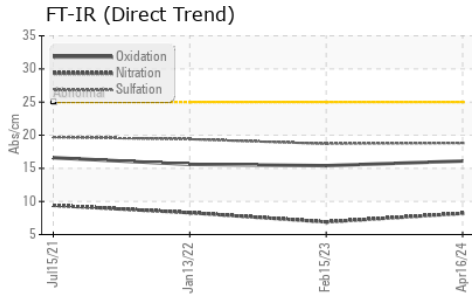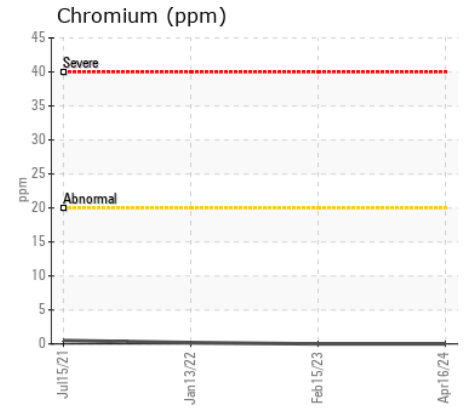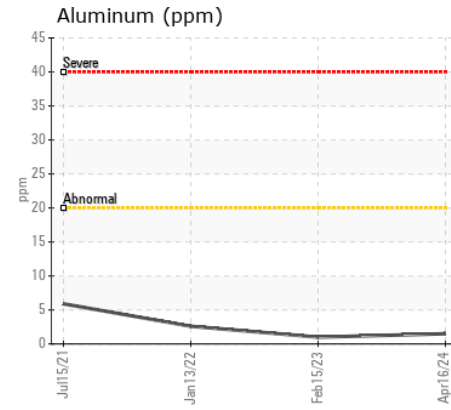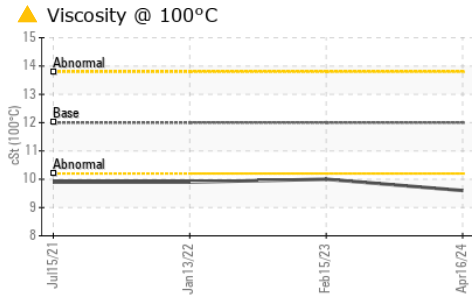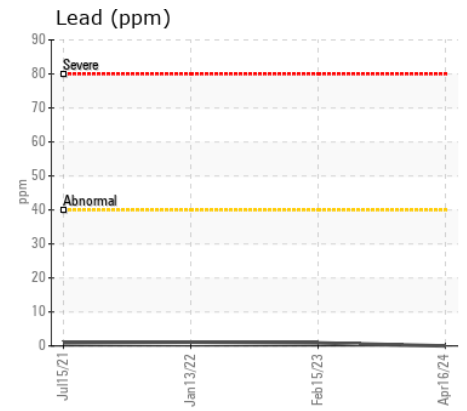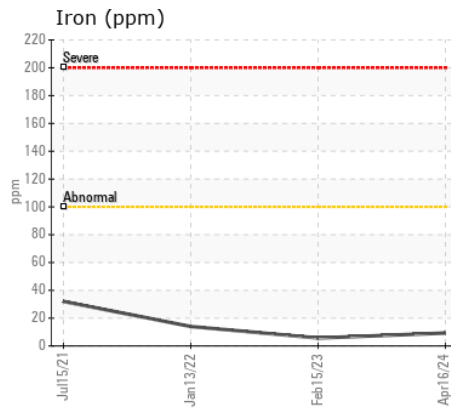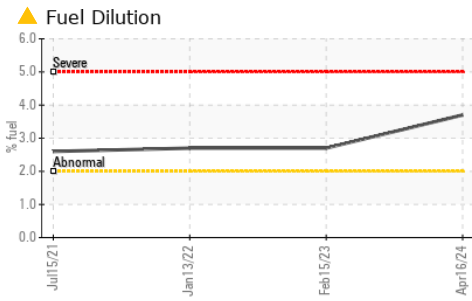

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0108217
Lab Number : 02638801
Unique Number : 5787963
Test Package : MOB 1 (Additional Tests: PercentFuel, Visual)

GFL Environmental - 355 - Saskatoon
 100 Cory Road
 Saskatoon, SK
 CA S7K 3J7
 Contact: Ryan Polichuk
 rpolichuk@gflenv.com
 T: (306)244-9500
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.