



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CRUISER 319000756

Component
Port Drive

Fluid
GEAR OIL SAE 75W90 (20 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0950382	---	---
Sample Date		Client Info		28 May 2024	---	---
Machine Age	kms	Client Info		1500	---	---
Oil Age	kms	Client Info		10	---	---
Filter Age	kms	Client Info		10	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
<hr/>						
Iron	ppm	ASTM D5185(m)	>150	25	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	4	---	---
Lead	ppm	ASTM D5185(m)	>100	0	---	---
Copper	ppm	ASTM D5185(m)	>50	4	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
<hr/>						
Silicon	ppm	ASTM D5185(m)	>50	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
<hr/>						
Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	400	270	---	---
Barium	ppm	ASTM D5185(m)	200	0	---	---
Molybdenum	ppm	ASTM D5185(m)	12	0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	12	2	---	---
Calcium	ppm	ASTM D5185(m)	150	4	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	1345	---	---
Zinc	ppm	ASTM D5185(m)	125	16	---	---
Sulfur	ppm	ASTM D5185(m)	22500	22411	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	109	106	---	---

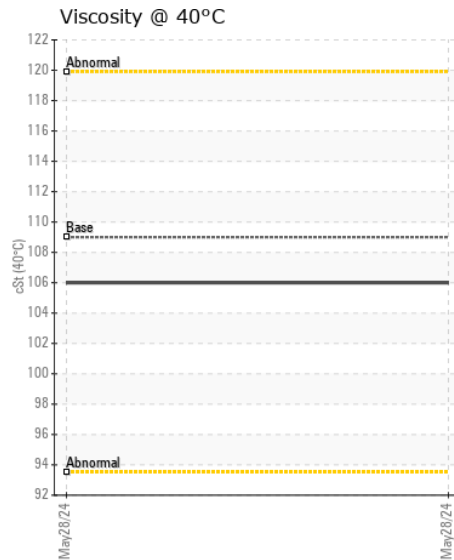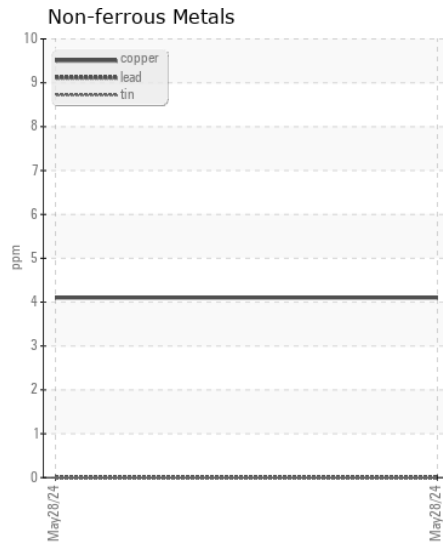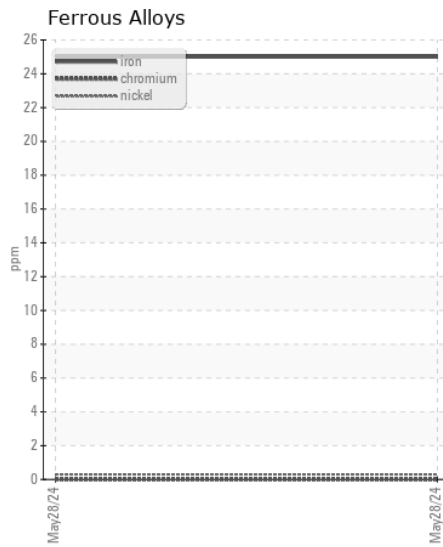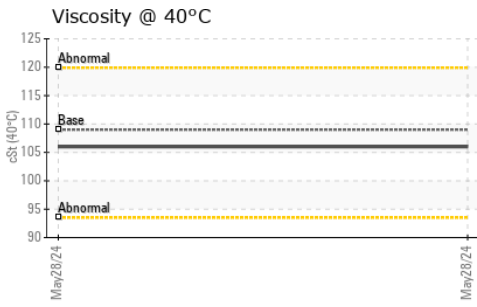

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0950382
Lab Number : 02638907
Unique Number : 5788069
Test Package : MAR 1
Received : 30 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Wes Davis

BEACHES MARINE BROKERAGE
 2146 A QUEEN ST E SUITE 106
 TORONTO, ON
 CA M4E 1E3
 Contact: CHARLES FARRAN
 beachesmarine@hotmail.com
 T: (416)691-0312
 F: (866)477-0666

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.