



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[44039926]

Machine Id

L1316

Component

Diesel Engine

Fluid

CHEVRON DELO 400 SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0553866	---	---
Sample Date		Client Info		02 Apr 2024	---	---
Machine Age	kms	Client Info		316256	---	---
Oil Age	kms	Client Info		15000	---	---
Filter Age	kms	Client Info		15000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	15	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	5	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	5	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>6	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.2	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.7	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		63	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		5	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		729	---	---
Calcium	ppm	ASTM D5185(m)		1367	---	---
Phosphorus	ppm	ASTM D5185(m)	1260	681	---	---
Zinc	ppm	ASTM D5185(m)	1400	775	---	---
Sulfur	ppm	ASTM D5185(m)		2451	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.1	11.1	---	---

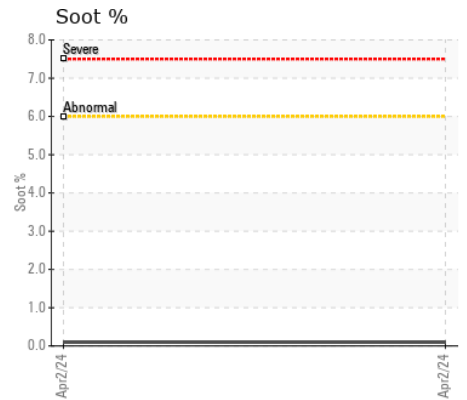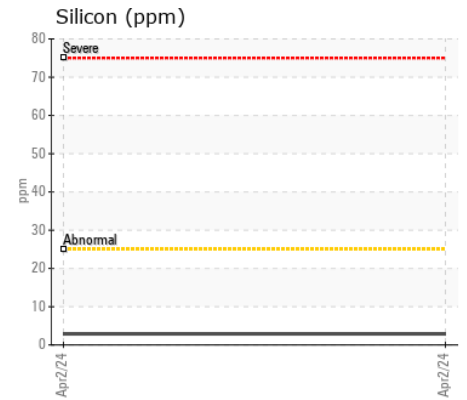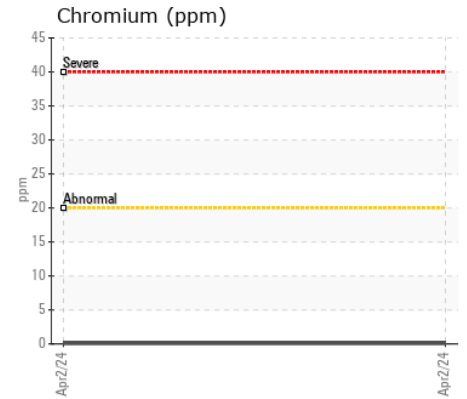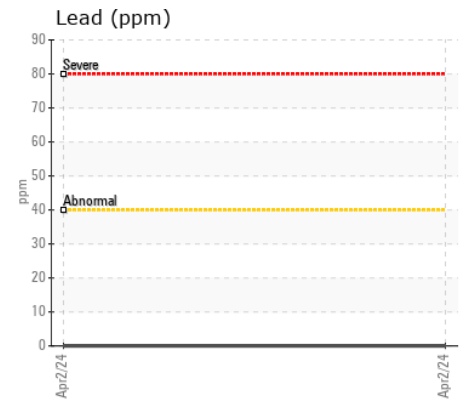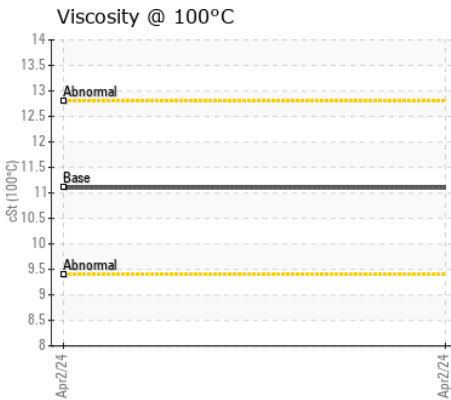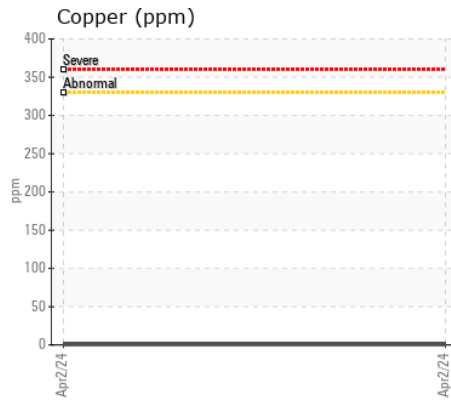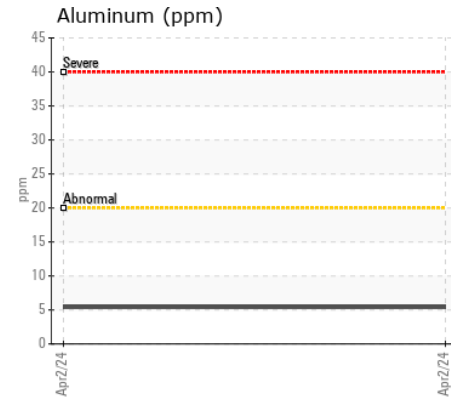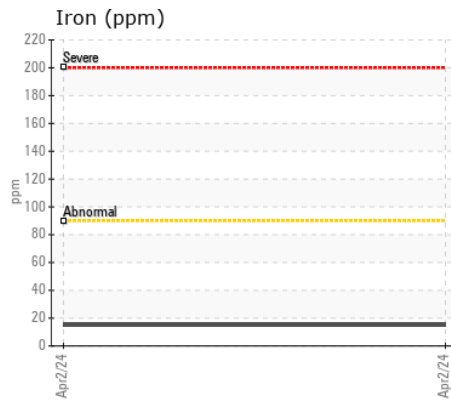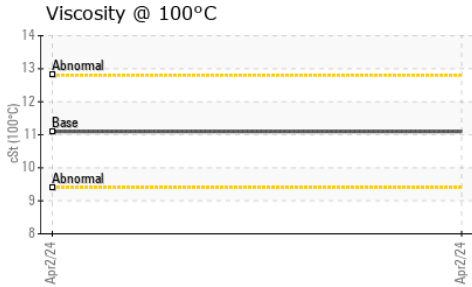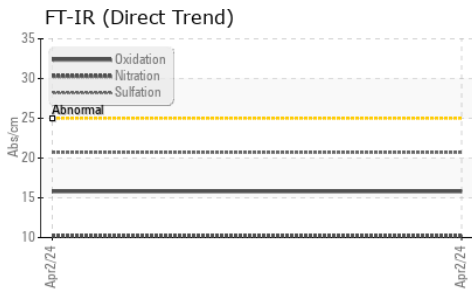

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0553866 **Received** : 30 May 2024
Lab Number : **02639012** **Tested** : 30 May 2024
Unique Number : 5788174 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

RUSH TRUCK CENTRES OF CANADA
 1750 MCCONNELL AVE
 CORNWALL, ON
 CA K6H 5V3
 Contact: Service Manager
 cornwallservice@rushtruckcentres.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.