

Area  
**MICHAUDVILLE**  
Machine Id  
**1253**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0088496</b>	PC0077582	PC0070998
Sample Date		Client Info		<b>30 May 2024</b>	19 Dec 2023	14 Mar 2023
Machine Age	kms	Client Info		<b>126024</b>	0	3819
Oil Age	kms	Client Info		<b>0</b>	0	0
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>10</b>	11	12
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>11</b>	14	13
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>330	<b>6</b>	6	15
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>16</b>	23	19
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.2</b>	0.2	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.7</b>	6.5	6.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.2</b>	18.6	20.8
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	<b>1</b>	1	2
Boron	ppm	ASTM D5185(m)	250	<b>1</b>	1	2
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>57</b>	58	57
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>968</b>	947	931
Calcium	ppm	ASTM D5185(m)	3000	<b>1162</b>	1113	1158
Phosphorus	ppm	ASTM D5185(m)	1150	<b>985</b>	1004	1077
Zinc	ppm	ASTM D5185(m)	1350	<b>1212</b>	1175	1179
Sulfur	ppm	ASTM D5185(m)	4250	<b>2558</b>	2674	2617
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.3</b>	14.0	14.4
Visc @ 40°C	cSt	ASTM D7279(m)	115	<b>93.5</b>	91.4	94.5
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>13.8</b>	13.6	13.7
Viscosity Index (VI)	Scale	ASTM D2270*	126	<b>150</b>	150	146

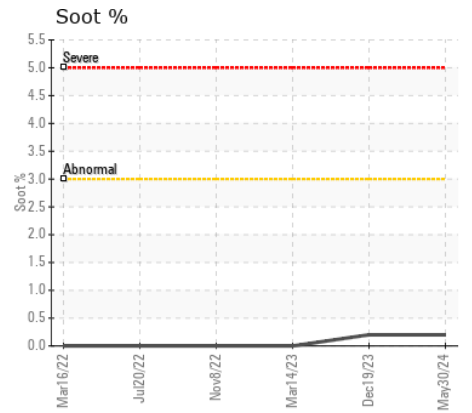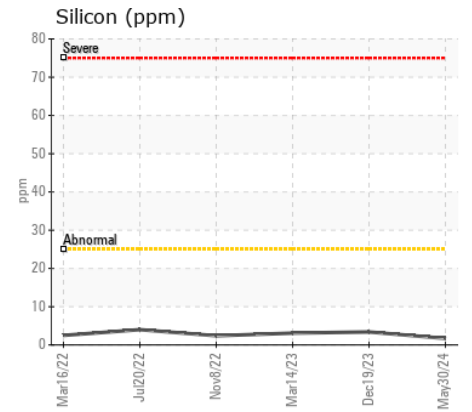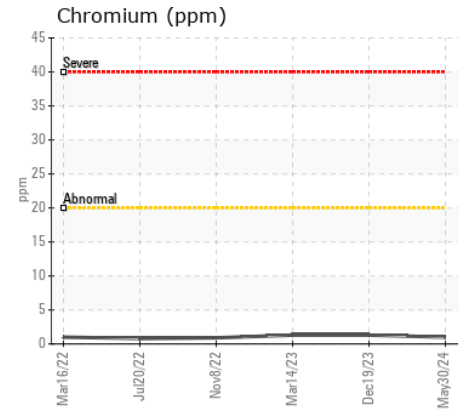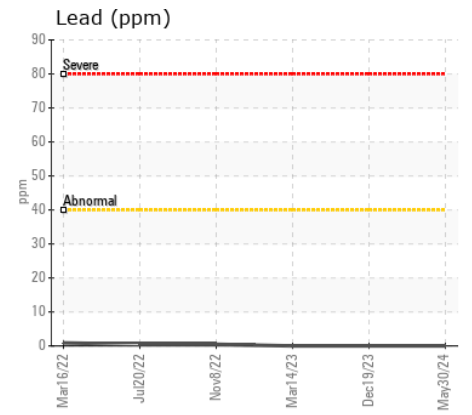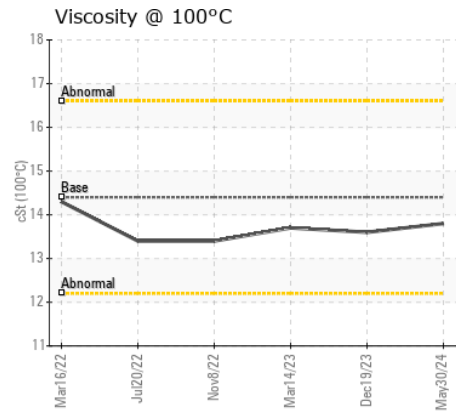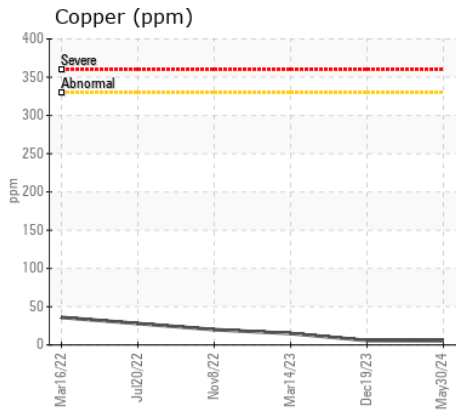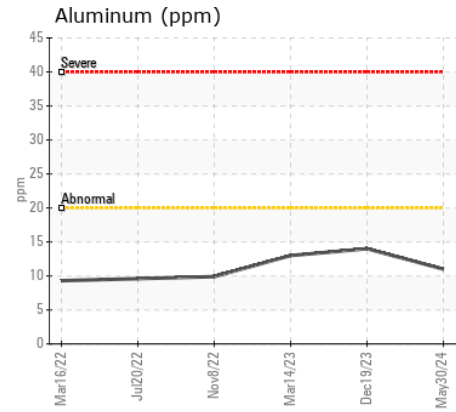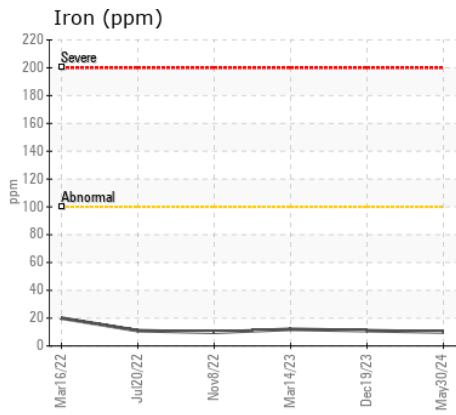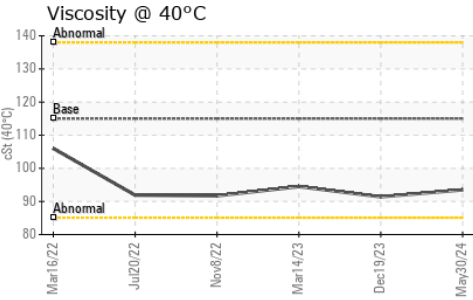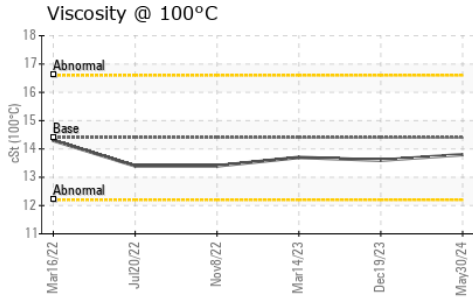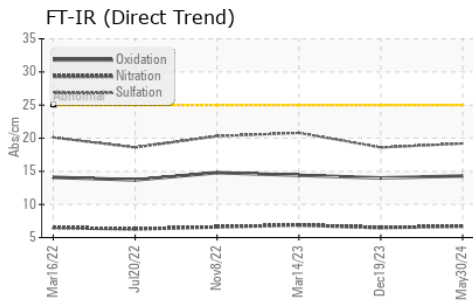

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0088496  
**Lab Number** : 02639099  
**Unique Number** : 5788261  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**LES ENTREPRISES MICHAUVILLE INC.**  
 270 RUE BRUNET  
 MONT ST-HILAIRE, QC  
 CA J3H 0M6  
 Contact: Martin Trudel  
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: