



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2205
 Component
Diesel Engine
 Fluid
VALVOLINE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0903006	WC0903010	WC0875076
Sample Date		Client Info		15 May 2024	05 Apr 2024	21 Dec 2023
Machine Age	kms	Client Info		192469	183108	164382
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	5	5	5
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>2	0	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	1	1	2
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	7	3
Potassium	ppm	ASTM D5185(m)	>20	2	1	1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	7.5	7.4	7.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.0	18.6	18.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	1	1
Boron	ppm	ASTM D5185(m)	39	13	11	13
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)	49	7	6	8
Manganese	ppm	ASTM D5185(m)	1	0	0	0
Magnesium	ppm	ASTM D5185(m)	616	65	58	53
Calcium	ppm	ASTM D5185(m)	1554	2252	2246	2249
Phosphorus	ppm	ASTM D5185(m)	899	834	866	874
Zinc	ppm	ASTM D5185(m)	1069	1009	991	1025
Sulfur	ppm	ASTM D5185(m)	2624	2910	2911	3179
Oxidation	Abs/.1mm	ASTM D7414*	>25	11.4	11.5	11.8
Visc @ 100°C	cSt	ASTM D7279(m)	13.6	13.3	13.1	13.2

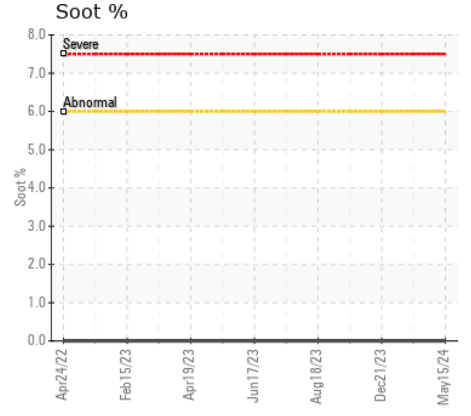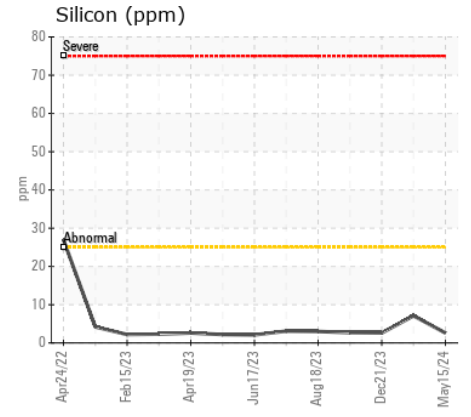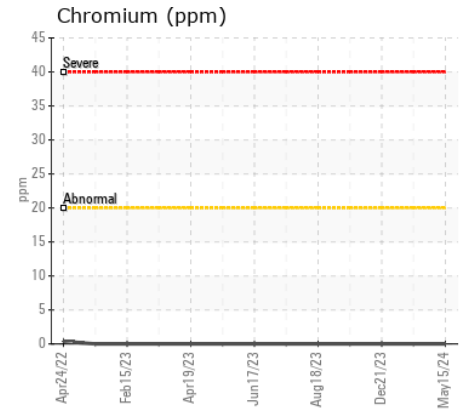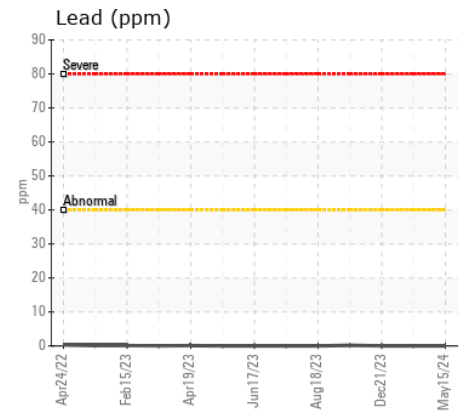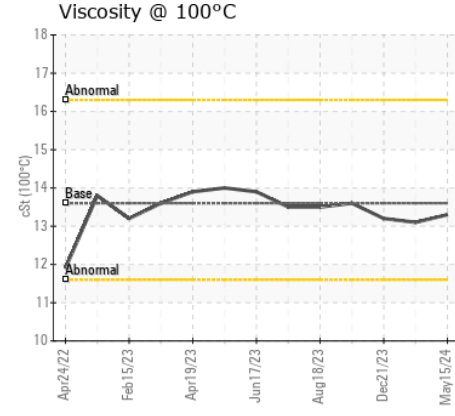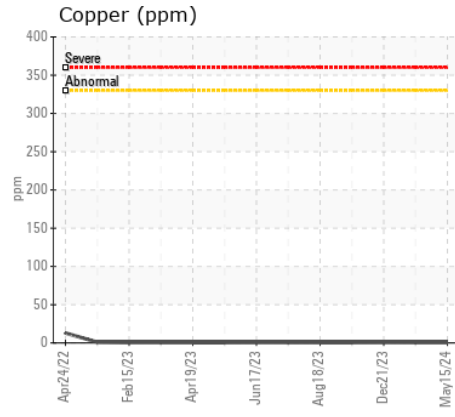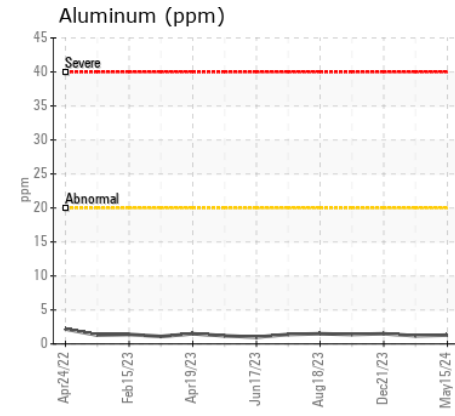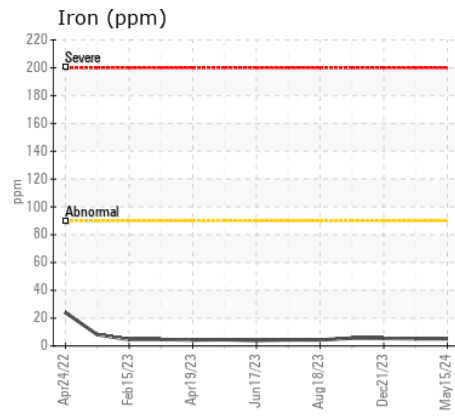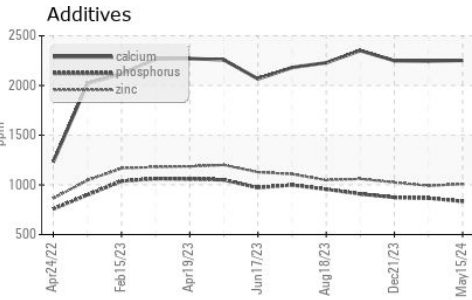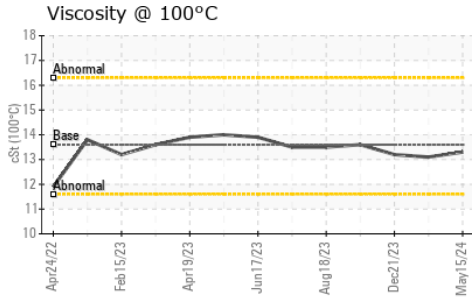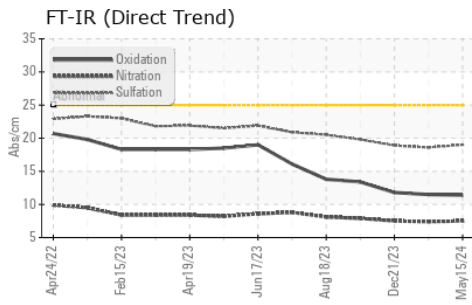

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0903006
Lab Number : 02639119
Unique Number : 5788281
Test Package : MOB 1
Received : 31 May 2024
Tested : 31 May 2024
Diagnosed : 31 May 2024 - Wes Davis

MVT Canadian Bus
 133 Welham Road
 Barrie, ON
 CA L4N 8Y3
 Contact: Kyle Trew
 kyle.trew@mvtcanada.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: