



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[8-405377]

Machine Id

633131

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP430196	VCP353418	VCP381743
Sample Date		Client Info		23 May 2024	19 Oct 2023	22 Mar 2023
Machine Age	hrs	Client Info		1486	1008	536
Oil Age	hrs	Client Info		500	500	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	19	49	25
Chromium	ppm	ASTM D5185(m)	>20	1	3	3
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	<1
Silver	ppm	ASTM D5185(m)	>2	0	2	<1
Aluminum	ppm	ASTM D5185(m)	>30	10	▲ 45	37
Lead	ppm	ASTM D5185(m)	>40	1	6	4
Copper	ppm	ASTM D5185(m)	>20	10	36	14
Tin	ppm	ASTM D5185(m)	>20	2	6	3
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	5	19	15
Potassium	ppm	ASTM D5185(m)	>20	<1	3	2
Fuel		WC Method	>6.0	<1.0	<1.0	0.8
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.3	0
Nitration	Abs/cm	ASTM D7624*	>20	8.1	9.4	7.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.3	22.9	24.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	6	4
Boron	ppm	ASTM D5185(m)	2.5	40	28	39
Barium	ppm	ASTM D5185(m)	0.0	4	29	26
Molybdenum	ppm	ASTM D5185(m)	0.7	41	49	41
Manganese	ppm	ASTM D5185(m)	0.0	<1	3	2
Magnesium	ppm	ASTM D5185(m)	256	547	807	691
Calcium	ppm	ASTM D5185(m)	2057	1736	1676	1549
Phosphorus	ppm	ASTM D5185(m)	935	922	1096	1051
Zinc	ppm	ASTM D5185(m)	1223	1123	1307	1129
Sulfur	ppm	ASTM D5185(m)	4079	2451	3123	3012
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.5	20.3	18.9
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	13.0	12.9	12.8

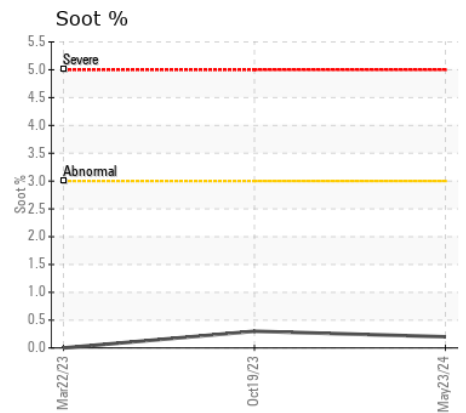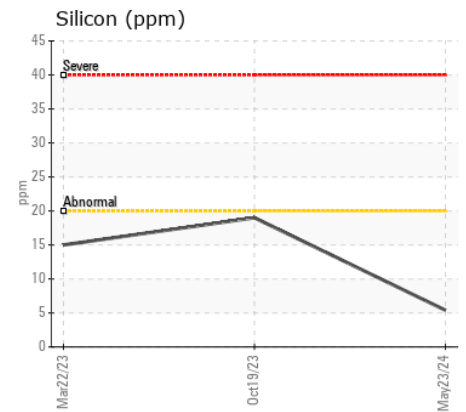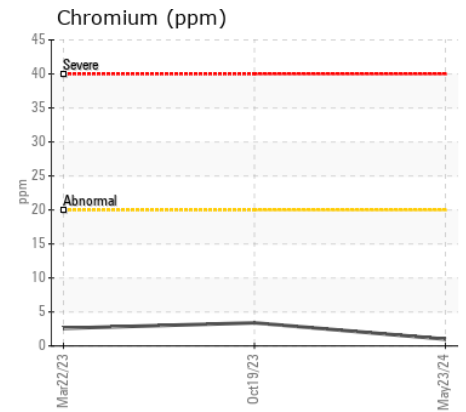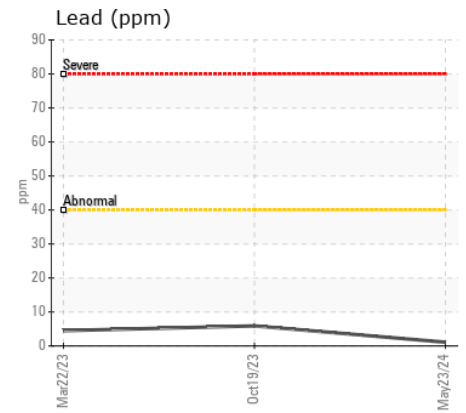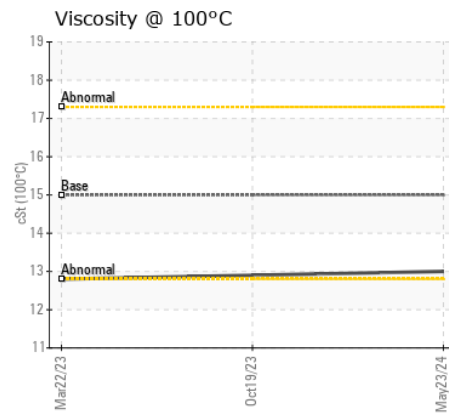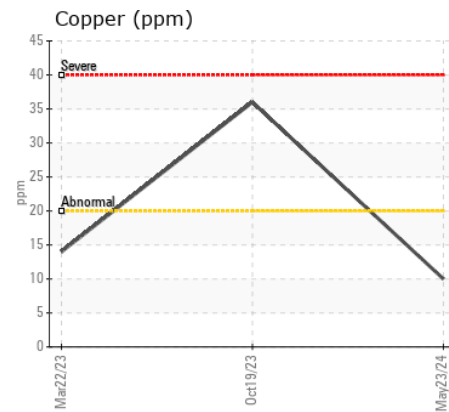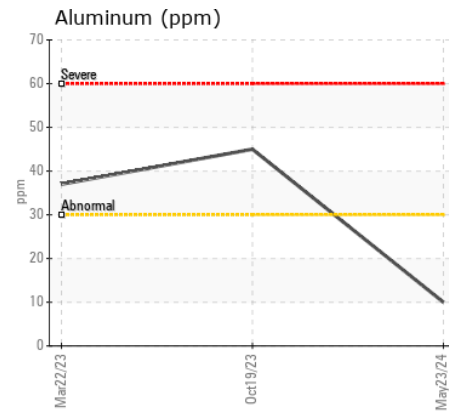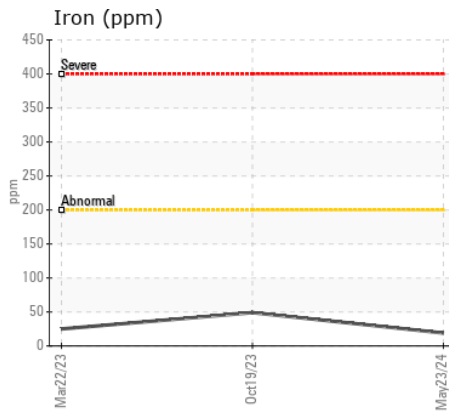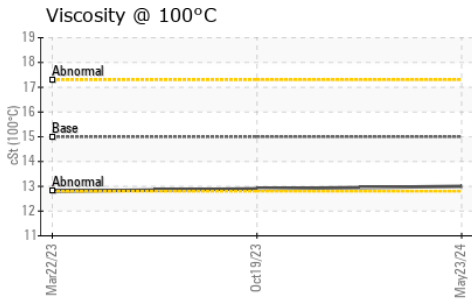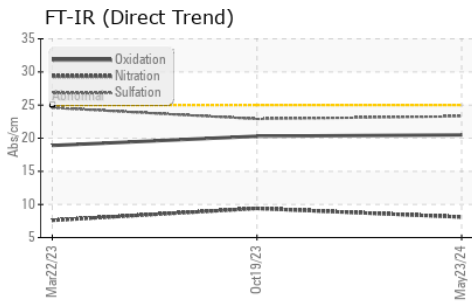

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP430196 **Received** : 31 May 2024
Lab Number : 02639129 **Tested** : 31 May 2024
Unique Number : 5788291 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : MOB 1

CRH CANADA GROUP INC.
 P.O. BOX 5400
 CONCORD, ON
 CA L4K 1B6
 Contact: Tim Visser
 tvisser@strongco.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.