



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Machine Id
OE444
Component
Transmission (Auto)
Fluid
TES SYN 295 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION


There is no indication of any contamination in the fluid.

FLUID CONDITION


Viscosity of sample indicates oil is within ISO 220 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0124636	---	---
Sample Date		Client Info		30 May 2024	---	---
Machine Age	hrs	Client Info		947	---	---
Oil Age	hrs	Client Info		947	---	---
Filter Age	hrs	Client Info		947	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ABNORMAL	---	---
<hr/>						
Iron	ppm	ASTM D5185(m)	>160	25	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	<1	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>225	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
<hr/>						
Silicon	ppm	ASTM D5185(m)	>20	17	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
<hr/>						
Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	85	<1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	1	<1	---	---
Calcium	ppm	ASTM D5185(m)	100	4	---	---
Phosphorus	ppm	ASTM D5185(m)	200	301	---	---
Zinc	ppm	ASTM D5185(m)	0	22	---	---
Sulfur	ppm	ASTM D5185(m)	1500	1509	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	37.0	215	---	---


▲ Viscosity @ 40°C

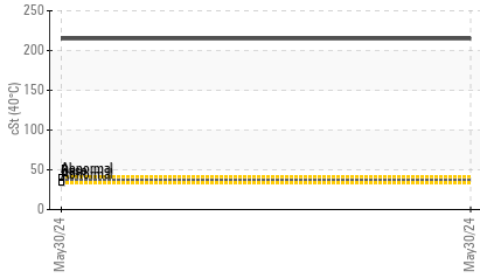


● Additives

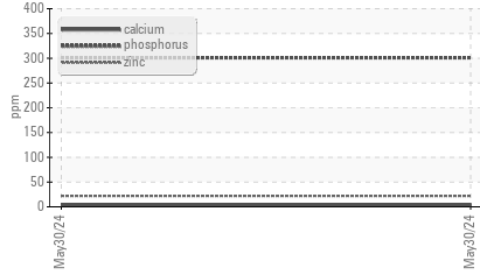


Iron (ppm)

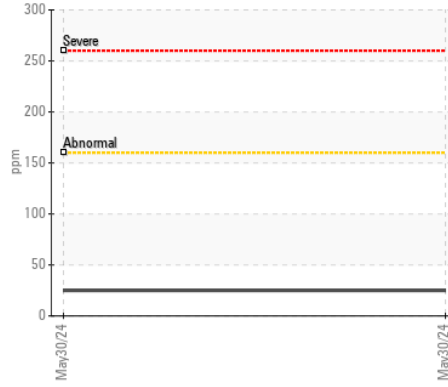


Aluminum (ppm)

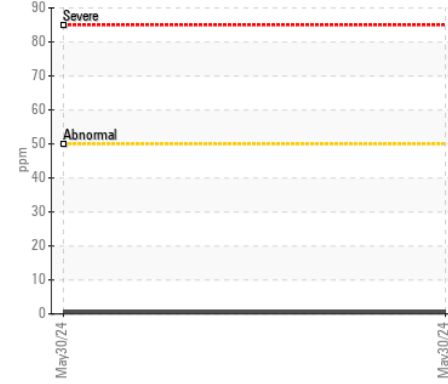


Copper (ppm)

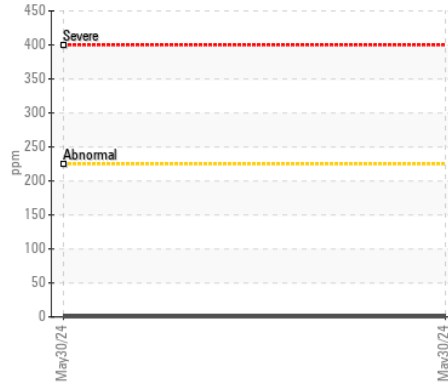


▲ Viscosity @ 40°C

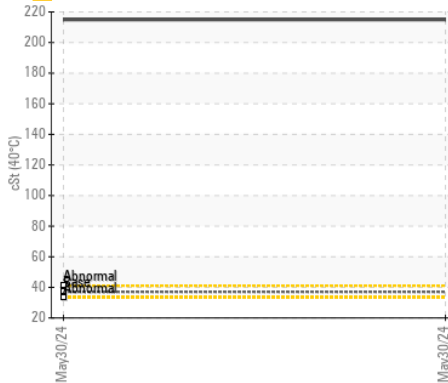


Lead (ppm)

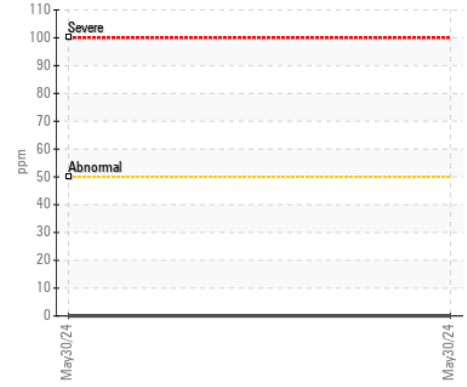


Chromium (ppm)

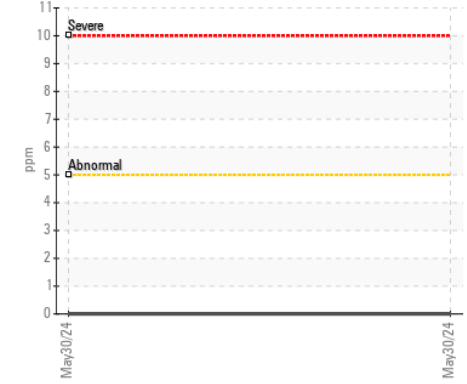

Silicon (ppm)

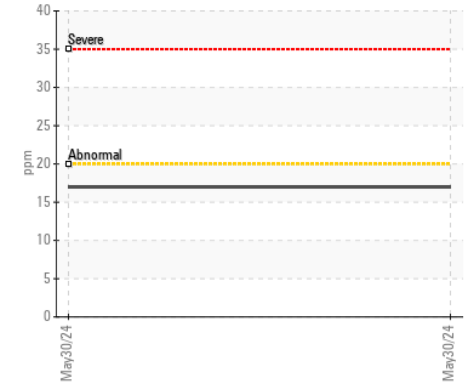

● Additives

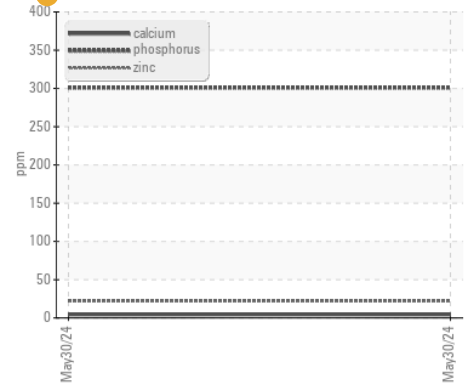

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0124636
Lab Number : 02639190
Unique Number : 5788352
Test Package : MOB 1

Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Kevin Marson

GFL Environmental - 720 - Lafleche - Landfill
 17125 Lafleche Road,
 Moose Creek, ON
 CA K0C 1W0
 Contact: Charles Bergeron
 cbergeron@gflenv.com
 T: (613)538-4853
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.