

Machine Id
Or562
Component
Front Differential
Fluid
PETRO CANADA GEARLUBE TOS 80W140 (18 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113398	GFL0113371	GFL0056414
Sample Date		Client Info		28 May 2024	22 Feb 2024	14 Jun 2023
Machine Age	hrs	Client Info		22198	21863	20535
Oil Age	hrs	Client Info		16705	17698	1554
Filter Age	hrs	Client Info		16705	500	1554
Oil Changed		Client Info		Oil Added	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Changed	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	69	45	43
Chromium	ppm	ASTM D5185(m)	>10	<1	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	1	0	<1
Lead	ppm	ASTM D5185(m)	>25	0	0	<1
Copper	ppm	ASTM D5185(m)	>100	6	4	3
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	3	2	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)	170	227	231	238
Barium	ppm	ASTM D5185(m)	4	0	0	0
Molybdenum	ppm	ASTM D5185(m)		20	10	6
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)	1.0	2	1	1
Calcium	ppm	ASTM D5185(m)	16	6	4	3
Phosphorus	ppm	ASTM D5185(m)	920	939	941	1071
Zinc	ppm	ASTM D5185(m)	8	14	11	11
Sulfur	ppm	ASTM D5185(m)	1630	16365	16560	17869
Visc @ 40°C	cSt	ASTM D7279(m)	249.3	220	221	223

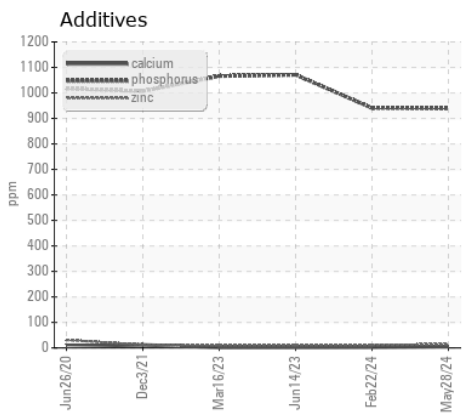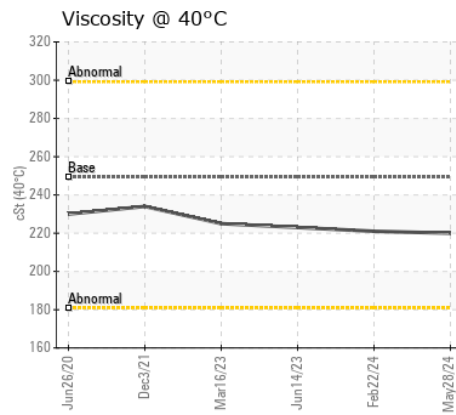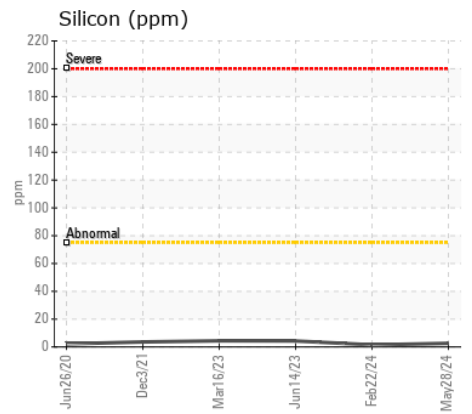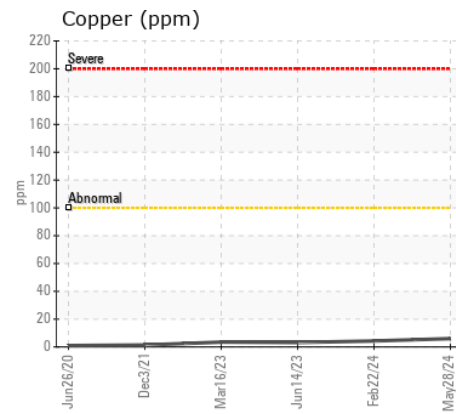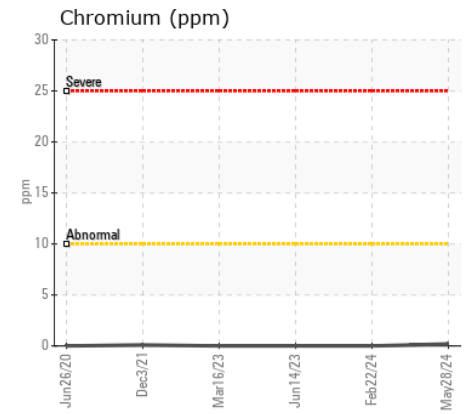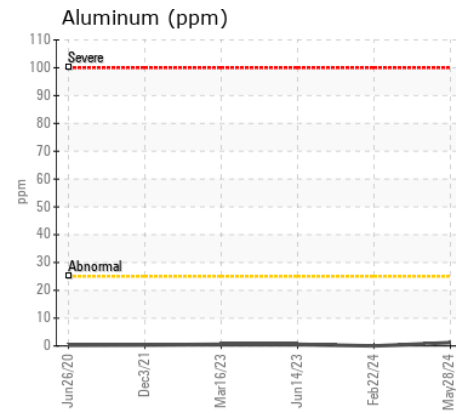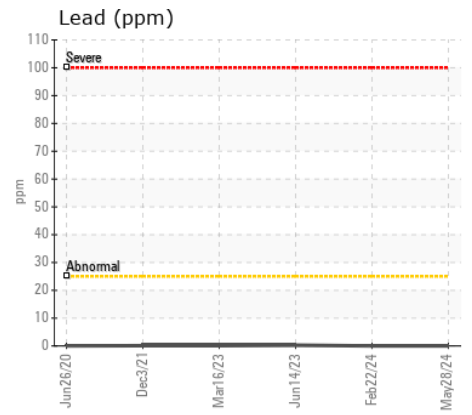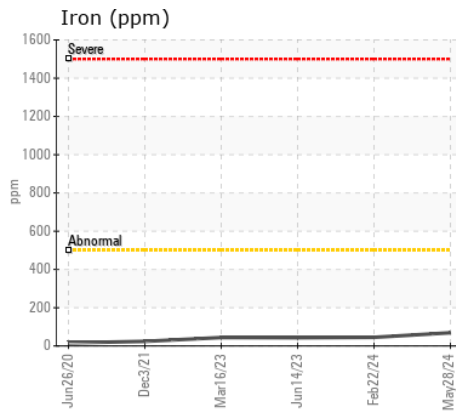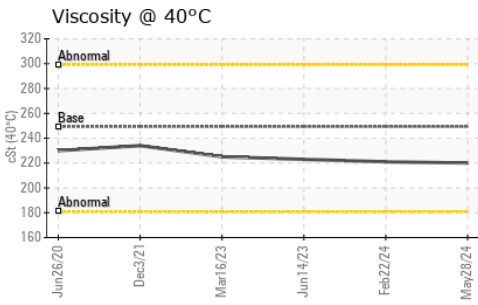

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113398
Lab Number : 02639218
Unique Number : 5788380
Test Package : MOB 1

GFL Environmental - 720 - Lafleche - Landfill
 17125 Lafleche Road,
 Moose Creek, ON
 CA K0C 1W0
 Contact: Charles Bergeron
 cbergeron@gflenv.com
 T: (613)538-4853
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.