

Area

## NORMAL WEAR NORMAL CONTAMINATION FLUID CONDITION NORMAL




(335553)LIEBHERR T60-9s 021026-1709 omponen Rear Left Wheel Hub


LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION	Т
Resample at the next service interval to monitor.	S
	S
	N
	C
	F
	C
	S
WEAR	Ir
All component wear rates are normal.	C
	N T
	S
	Α
	L
	C
	Т
	V
	V
	Y
CONTAMINATION	S
There is no indication of any contamination in the oil.	F
	V
	S
	0
	S
	Α
	C
FLUID CONDITION	S
The condition of the oil is acceptable for the time in service.	B
	B

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0274061	LH	
Sample Date		Client Info		29 Jun 2023	18 May 2023	
Machine Age	hrs	Client Info		1000	2330	
Oil Age	hrs	Client Info		0	0	
Filter Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Changed	Changed	
Filter Changed		Client Info		Changed	N/A	
Sample Status				NORMAL	NORMAL	
Iron		ASTM D5185(m)	>500	168	151	
Chromium	ppm	ASTM D5185(m)			-	
	ppm		>8	<1	<1	
Nickel	ppm	ASTM D5185(m)	>5	0	0	
Titanium	ppm	ASTM D5185(m)		0	<1	
Silver	ppm	ASTM D5185(m)	. 5	0	0	
Aluminum	ppm	ASTM D5185(m)	>5	<1	1	
Lead	ppm	ASTM D5185(m)	>5	0	1	
Copper	ppm	ASTM D5185(m)	>50	25	49	
Tin	ppm	ASTM D5185(m)		0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
White Metal	scalar	Visual*	NONE	LIGHT	VLITE	
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	
Silicon	ppm	ASTM D5185(m)	>25	7	13	
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	
Water		WC Method	>0.2	NEG	NEG	
Silt	scalar	Visual*	NONE	NONE	NONE	
Debris	scalar	Visual*	NONE	NONE	NONE	
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	
Appearance	scalar	Visual*	NORML	NORML	NORML	
Odor	scalar	Visual*	NORML	NORML	NORML	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	
Sodium		ASTM D5185(m)		3	1	
Sodium Boron	ppm ppm	ASTM D5185(m)	0	3 10	1 73	
Barium	ppm	ASTM D5185(m)	0	0	0	
Molybdenum	ppm	ASTM D5185(m)	0	0	0	
Manganese	ppm	ASTM D5185(m)	0	ہ <1	<1	
Magnesium	ppm	ASTM D5185(m)		5	11	
Calcium		ASTM D5185(m)	<1	375	2594	
Phosphorus	ppm ppm	ASTM D5185(m)	2143	2092	1713	
1 103010103	ppill	A0100000000000000000000000000000000000	2140	2092		
	nnm	∆STM D5185(m)	~1	154	101/	
Zinc	ppm	ASTM D5185(m)	<1	154	1014	
-	ppm ppm cSt	ASTM D5185(m) ASTM D5185(m) ASTM D7279(m)	<1 23468 170	154 22906 156	1014 11590 65.3	

Submitted By: Olivier Duceppe

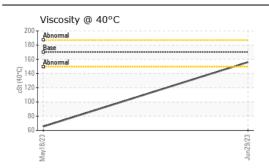

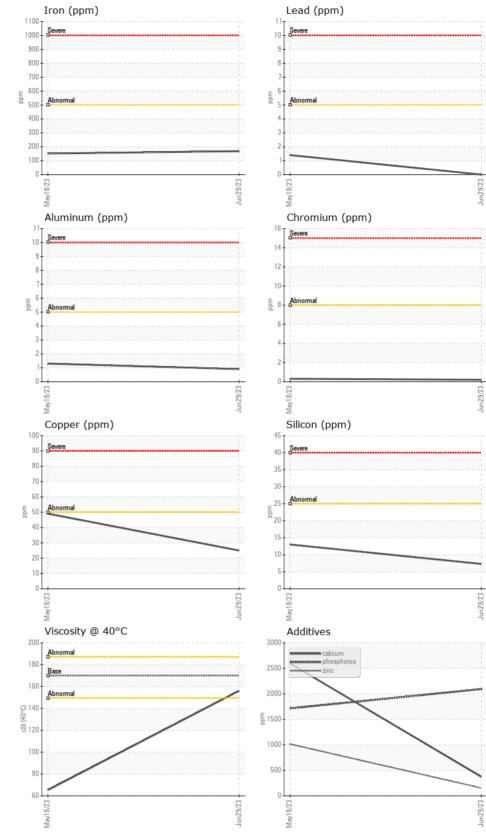



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 CALA Sample No. Received : 31 May 2024 : LH0274061 Lab Number : 02639234 Tested : 31 May 2024 ISO 17025:2017 Accredited Laboratory Unique Number : 5788396 Diagnosed : 31 May 2024 - Wes Davis Test Package : MOB 1 To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Submitted By: Olivier Duceppe Page 2 of 2

9168-3094 QC INC. 379 DU COLLEGE St Donat de Montcalm, QC CA J0T 2C0 Contact: Service Manager

> T: F: