



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(335553)
Machine Id
LIEBHERR T60-9s 021026-1709
Component
Rear Right Wheel Hub
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0274062	LH	---
Sample Date		Client Info		29 Jun 2023	18 May 2023	---
Machine Age	hrs	Client Info		1000	2330	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	141	96	---
Chromium	ppm	ASTM D5185(m)	>8	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>5	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>5	1	1	---
Lead	ppm	ASTM D5185(m)	>5	0	1	---
Copper	ppm	ASTM D5185(m)	>50	30	36	---
Tin	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	7	11	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	<1	---
Boron	ppm	ASTM D5185(m)	0	11	75	---
Barium	ppm	ASTM D5185(m)	0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	0	0	0	---
Manganese	ppm	ASTM D5185(m)	0	<1	<1	---
Magnesium	ppm	ASTM D5185(m)	<1	6	12	---
Calcium	ppm	ASTM D5185(m)	<1	383	2723	---
Phosphorus	ppm	ASTM D5185(m)	2143	2072	1690	---
Zinc	ppm	ASTM D5185(m)	<1	149	1047	---
Sulfur	ppm	ASTM D5185(m)	23468	22822	10575	---
Visc @ 40°C	cSt	ASTM D7279(m)	170	152	62.1	---

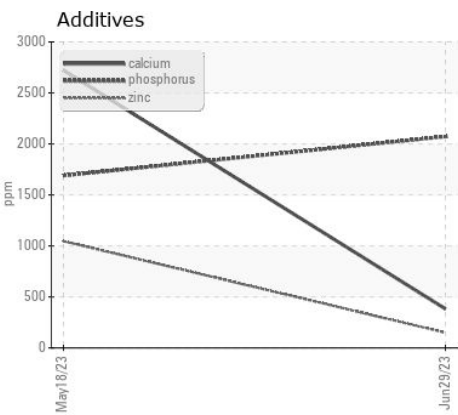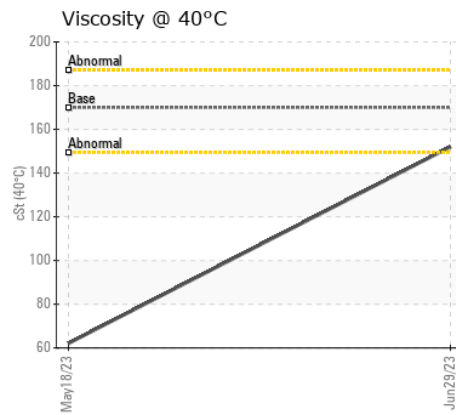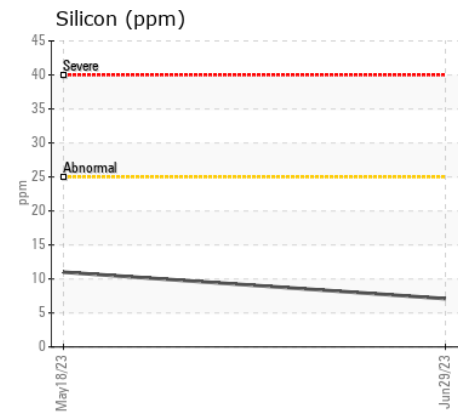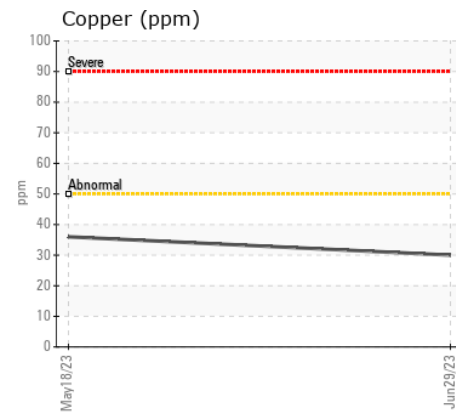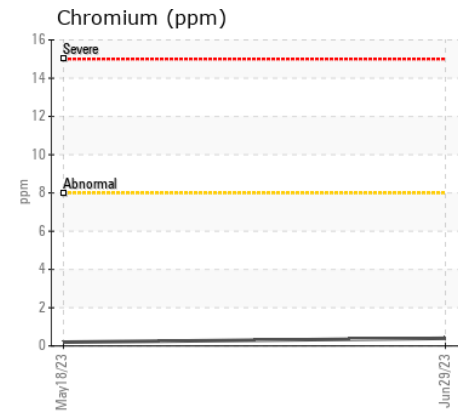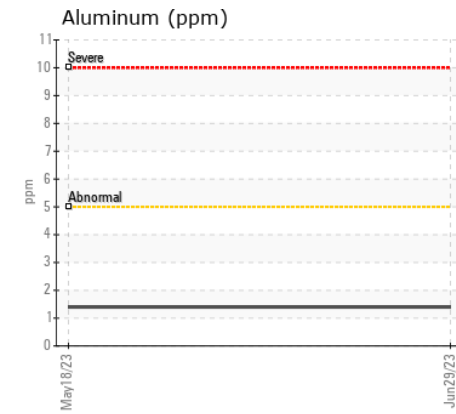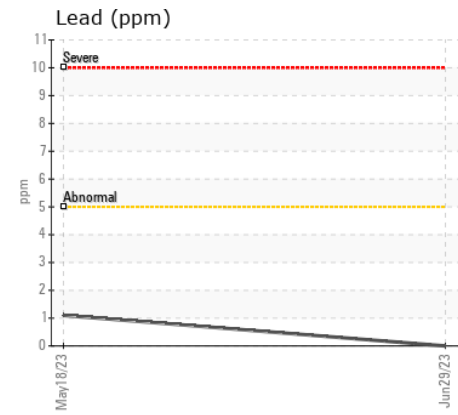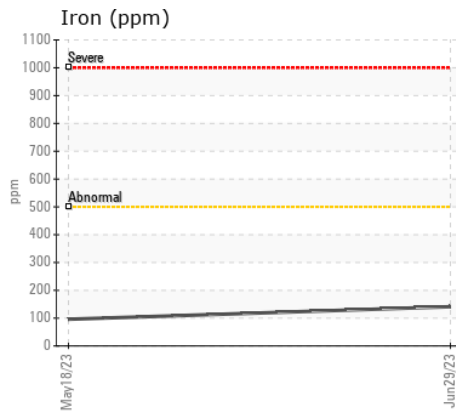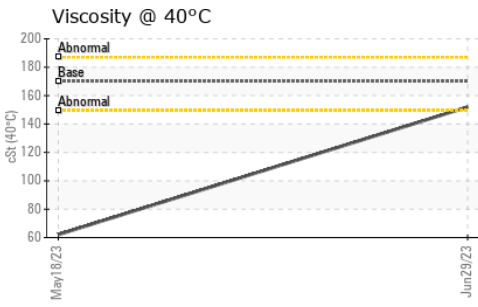

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0274062 **Received** : 31 May 2024
Lab Number : 02639236 **Tested** : 31 May 2024
Unique Number : 5788398 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : MOB 1

9168-3094 QC INC.
 379 DU COLLEGE
 St Donat de Montcalm, QC
 CA J0T 2C0
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: